







# ASSPs

Application Specific Standard Products

2025

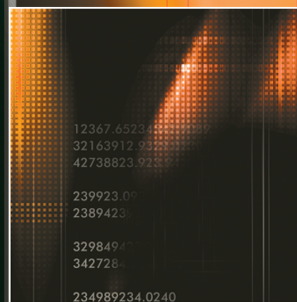

## Business Concept

The widespread of smartphones and tablets make improvements of broadband and wireless communications, then the advanced information and telecommunications network society has become a reality. In particular, semiconductors for use in portable devices, information terminals, in-vehicle devices and FA devices are expected to provide higher performance in terms of thinner structure, lighter weight, and longer operation with limited power supply. We have been focusing on the creation of compact, low-power semiconductors since we started the development of CMOS LSI for watches in 1969. Since then, we have steadily built up our expertise in energy-saving, space-saving, and time-saving designs. This has enabled us to quickly obtain the semiconductor development technology needed to meet the demands of the new era of the advanced information and telecommunications network society. Our concept is to develop "saving technologies" to reduce power consumption, development times, and implementation space. Our goal is to be a true partner for you, providing you with strategic advantages, enhancing your customer value based on our "saving technologies" and mixed analog/digital technologies that we have cultivated, as well as our design capabilities, manufacturing capabilities and stable supply that can satisfy your detailed requirements.

## Environmental Responsibility

Epson semiconductor technology provides environmental value to customers by creating and manufacturing eco-friendly products.

- 1) We Epson's products are surely complying with the Eu-RoHS (2011/65/EU) Directive.
- 2) We are releasing information about the containing chemical substances of products at web-site.

Product of QFP & BGA are described in the following URL.

[global.epson.com/products\\_and\\_drivers/semicon/information/package\\_lineup.html](http://global.epson.com/products_and_drivers/semicon/information/package_lineup.html) \*Some products are excluded.

### Environmental management system third party certification status ISO14001

Type of certification : ISO 14001: 2015, JIS Q 14001: 2015

Awarded to : TOHOKU EPSON CORPORATION,  
SEIKO EPSON CORPORATION (Fujimi Plant, Suwa Minami Plant)

Certified by : Bureau Veritas Certification

Date of certification : April 3, 1999

Type of certification : ISO 14001: 2015

Awarded to : Singapore Epson Industrial Pte. Ltd.

Certified by : SGS

Date of certification : Jan 12, 1999



## Epson's Quality Policy

Keeping the customer in mind at all times, we make the quality of our products and services our highest priority. In order to continue to creating products and services that please our customers and earn their trust. Epson's Semiconductor Business has acquired ISO9001 and IATF16949 certification with its IC, module and their application products.

### Quality Management system third party certification status ISO9001

Type of Certification : ISO9001: 2015 , JIS Q 9001: 2015

Awarded to : TOHOKU EPSON CORPORATION,  
SEIKO EPSON CORPORATION (Fujimi Plant, Suwa Minami Plant, Tokyo Office, Hirooka Office)

Certified by : Bureau Veritas Certification

Initial Date of Certification : October 10, 1993

Type of Certification : ISO9001: 2015

Awarded to : Singapore Epson Industrial Pte. Ltd.

Certified by : SGS

Initial Date of Certification : February 4, 2003




### IATF16949

Type of Certification : IATF16949:2016

Awarded to : TOHOKU EPSON CORPORATION, SEIKO EPSON CORPORATION  
(Fujimi Plant, Tokyo Office, Hirooka Office)  
Epson Europe Electronics GmbH, Epson America Inc.,  
Epson Canada Ltd. (Vancouver Design Center),  
Epson (China) Co., Ltd., Epson Hong Kong Ltd.

Certified by : Bureau Veritas Certification

Initial Date of Certification : Dec 9, 2017

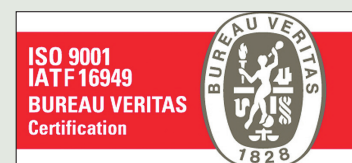

Type of Certification : IATF16949:2016

Awarded to : Singapore Epson Industrial Pte. Ltd.

Certified by : SGS

Initial Date of Certification : May 2, 2018






## C O N T E N T S

History of Epson semiconductor	4-5	Camera Interface Product Line up	18
Display Controller Product Line up	6-10	Camera Interface S2D13P04	19
Display Controller S1D13513	11	Speech & Audio Product Line up	20-21
Display Controller S1D13U11	12	Speech & Audio Tools for Development / Mass Production	22
Display Controller S1D13517	13	USB HUB Controller S2R72A54	23
Display Controller S1D13781	14	USB Re-Synchronization IC S2R72A11	24
Display Controller Reference Design	15-17		

## History of Epson Semiconductor's Technology

As the semiconductor division of "worldwide watch maker Seiko", semiconductor business has expanded into LCD Drivers, ASICs and MCUs from IC for Watches. These businesses are all based on Epson's energy-saving technology.

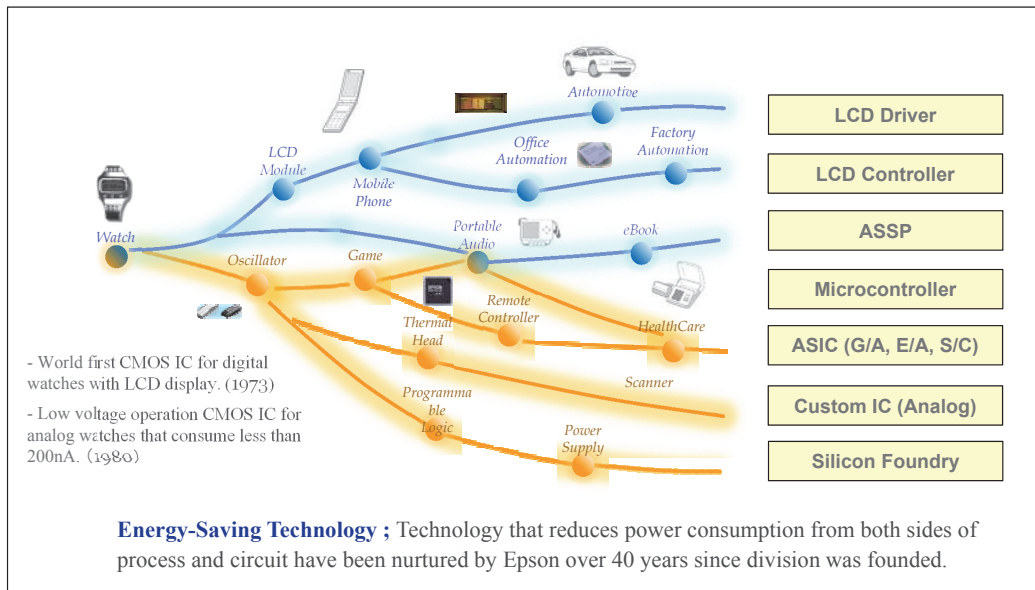


## Epson Semiconductor's History



- 1969 Development of CMOS IC for watches started
- 1973 CMOS IC production started in Headquarter
- 1980 Fujimi plant (B-wing, 4 inch) operation started
- 1984 A-wing (5 inch) operation started
- 1985 D-wing (6 inch) operation started
- 1991 Sakata plant (S-wing, 6 inch) operation started
- 1993 ISO9000 series certified
- 1994 Singapore assembly plant (SEP) operation started
- 1997 T-wing (8 inch, Sakata) operation started  
ISO14001 certified
- 2001 T-wing manufacturing line expanded
- 2006 ISO/TS16949 certified
- 2010 Microdevices Operations Division started
- 2017 IATF16949 certified

## Vision and Target Application


Epson aspires to be a device maker that contributes customers' business by valuable products with our unique core technology

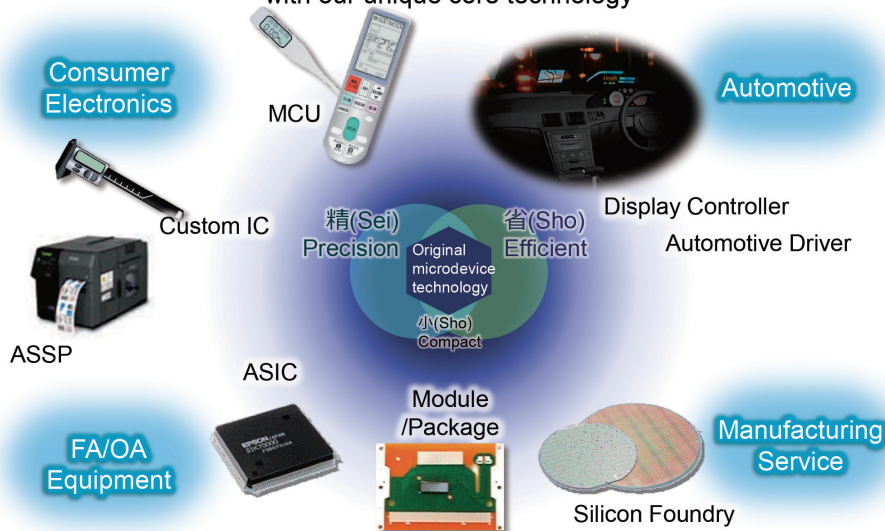

## Epson Product Line-up

### Microcontroller

- Low power consumption and Long life battery
- Support various LCD

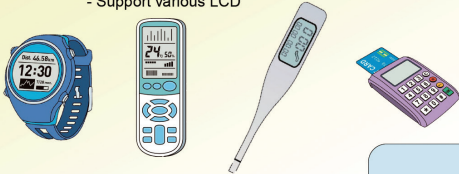


### LCD Driver/LCD Controller

- Automotive experience
- Advanced function embedded



Epson  
Semiconductor



- Since year 1982
- Supplying products to many customers'

ASIC



USB-HUB



Non-contact charge IC

- Provide Epson unique core technology

Valuable Products

## Display Controller Product Line up

Epson display controllers can reduce load on the host CPU at rendering, allow high-speed rendering with its original image processing engine, while also realizing an industry-leading minimal level of power consumption. We have a lineup of products supporting various display devices such as TFT/STN LCD panels, memory display, providing the most suitable solution for embedded devices for factory automation, office automation, household equipment and other applications.

### Display Controller Product Line up

[S1D13513]	TFT	MSTN	CSTN						16M colors (XGA)	
Sprite, BitBLT, Alpha blending, Picture in Picture										
[S1D13U11]	TFT								16M colors (SVGA)	
USB-HS interface, 3 windows display										
[S1D13517]	TFT								16M colors (SVGA)	
3 windows display										
[S1D13742]	TFT								64k colors (WVGA)	
Double buffer, Rotation, Gamma-LUT										
[S1D13748]	TFT								64k colors (WVGA)	
3 windows display, Alpha blending, Scaler										
[S1D13781]	TFT	MSTN	CSTN						16M colors (WQVGA) 256 colors (VGA)	
Alpha Blending, Picture in Picture										
[S1D13L04]	TFT							Simple LCDC	256k colors (XGA)	
Simple LCDC for XGA panel										
[S1D13L03]	TFT							Simple LCDC	64k colors (WVGA)	
Simple LCDC for WVGA panel										
[S1D13L02]	TFT							Simple LCDC	64k colors (WVGA)	
Simple LCDC for VGA panel										
[S1D13L01]	TFT							Simple LCDC	16M colors (WQVGA) 256 colors (WVGA)	Ext. SDRAM LCDC Embd. SRAM LCDC
Simple LCDC for WQVGA panel										
Resolution		QVGA	VGA	WVGA	SVGA	XGA				

### Display controller's example of application



# Display Controller Product Line up


# ASSPs

## ■ LCD Controller with Built-in VRAM

A single-chip LCD controller with built-in display memory allowing for low power consumption, low noise, and space-saving ability. This product is most suitable for the display control of mobile terminals and operation panels.

Product	CPU Interface Support	LCD Interface Support				Color Depth (Max.)	Internal Memory Capacity	Supply Voltage		Additional Features	Package
		Monochrome STN	Color STN	TFT	Typical Resolution			Core	IO		
S1D13700F02A	8-bit I/F, Direct addressing Indirect addressing	4-bit	n/a	n/a	QVGA	16 grayscale	32KB, SRAM	3.0V to 3.6V	3.0V to 5.5V	3 overlay screens	TQFP13-64
S1D13705F00A	8-bit I/F (with external logic) 16-bit I/F, Direct addressing	4-bit / 8-bit	4-bit / 8-bit	9-bit / 12-bit	QVGA	MSTN:16 grayscale CSTN:256 colors TFT:256 colors	80KB, SRAM	2.7V to 3.6V	2.7V to 5.5V	SwivelView	QFP14-80
S1D13706F00A	8-bit I/F(with external logic), 16-bit I/F, Direct addressing	4-bit / 8-bit	4-bit / 8-bit / 16-bit	9-bit / 12-bit / 18-bit	QVGA	MSTN:64 grayscale CSTN:64K colors TFT:64K colors	80KB, SRAM	1.8V to 3.6V	1.8V to 3.6V	SwivelView, PinP	TQFP15-100
S1D13709F00A	8-bit I/F, Direct addressing Indirect addressing	4-bit	n/a	4-bit mono / 6-bit color	QVGA	MSTN:16 grayscale TFT:64 colors	32KB, SRAM	3.0V to 5.5V	3.0V to 5.5V	3 overlay screens	QFP14-80
S1D13742F01A	8-bit / 16-bit I/F Indirect addressing	n/a	n/a	18-bit	VGA	256K colors	768KB, SRAM	1.4V to 1.6V	1.65V to 3.60V	SwivelView	QFP20-144
S1D13743F00A	8-bit / 16-bit I/F Indirect addressing	n/a	n/a	18-bit / 24-bit	WQVGA	16M colors	464KB, SRAM	1.4V to 1.6V	1.65V to 3.60V	SwivelView	QFP20-144
S1D13748F00A S1D13748B00B	16-bit I/F, Indirect addressing	n/a	n/a	18-bit / 24-bit	WVGA	64K colors	1024KB, SRAM	1.35V to 1.65V	1.62V to 3.60V	PinP	QFP20-144 PFBGA10U-121
S1D13781F00A	8-bit / 16-bit I/F, Direct addressing Indirect addressing, SPI	4-bit / 8-bit	8-bit / 16-bit	16-bit / 18-bit / 24-bit	WQVGA	MSTN:64 grayscale CSTN:64K colors TFT:16M colors	384KB, SRAM	1.35V to 1.65V	1.62V to 3.60V	PinP, a-Blend, 2D BitBLT	QFP15-100
S1D13A04F00A	8-bit I/F (with external logic) 16-bit I/F, Direct addressing	4-bit / 8-bit	4-bit / 8-bit / 16-bit	9-bit / 12-bit / 18-bit	QVGA	MSTN:64 grayscale CSTN:64K colors TFT:64K colors	160KB, SRAM	1.8V to 2.75V	3.0V to 3.6V	2D BitBLT, SwivelView, USB client 1.1	TQFP15-128 PFBGA10U-121
S1D13A05B00B	8-bit I/F (with external logic) 16-bit I/F, Direct addressing	4-bit / 8-bit	4-bit / 8-bit / 16-bit	9-bit / 12-bit / 18-bit	QVGA	MSTN:64 grayscale CSTN:64K colors TFT:64K colors	256KB, SRAM	1.8V to 2.75V	3.0V to 3.6V	2D BitBLT, SwivelView, USB client 1.1	PFBGA10U-121

## ■ S1D13781 Block Diagram

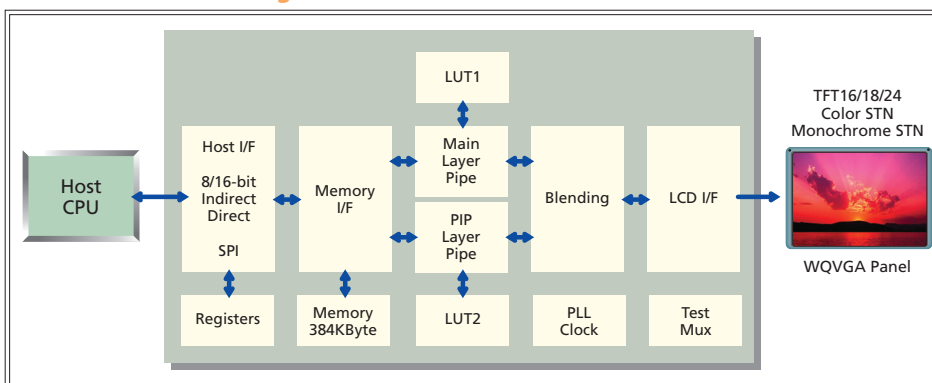


## Display Controller Product Line up

### ■ Simple LCD Controller

LCD controller with simple function.

Product	CPU Interface Support	LCD Interface Support				Color Depth (Max.)	Internal Memory Capacity	External Memory Capacity	Supply Voltage		Additional Features	Package
		Monochrome STN	Color STN	TFT	Typical Resolution				Core	IO		
S1D13L01F00A	8-bit / 16-bit I/F, Direct addressing, Indirect addressing, SPI	n/a	n/a	16-bit / 18-bit / 24-bit	WQVGA	16M colors	384KB, SRAM	n/a	1.35V to 1.65V	1.62V to 3.6V	Picture in picture	QFP15-128
S1D13L02F00A	16-bit I/F, Indirect addressing	n/a	n/a	18-bit / 24-bit	WVGA	16M colors	1024KB, SRAM	n/a	1.35V to 1.65V	1.62V to 3.6V	Picture in picture	QFP22-208
S1D13L03F00A	8-bit / 16-bit I/F, Indirect addressing	n/a	n/a	18-bit	WVGA	256K colors	768KB, SRAM	n/a	1.4V to 1.6V	1.65V to 3.6V	n/a	QFP21-176
S1D13L04F00A	16-bit I/F, Direct addressing, Indirect addressing, Serial I/F	n/a	n/a	18-bit	XGA	256K colors	n/a	Up to 16MB, SDRAM	1.65V to 1.95V	3.0V to 3.6V	Picture in picture, Alpha blend	QFP22-208

### ■ S1D13L01 Structure of Sales Board

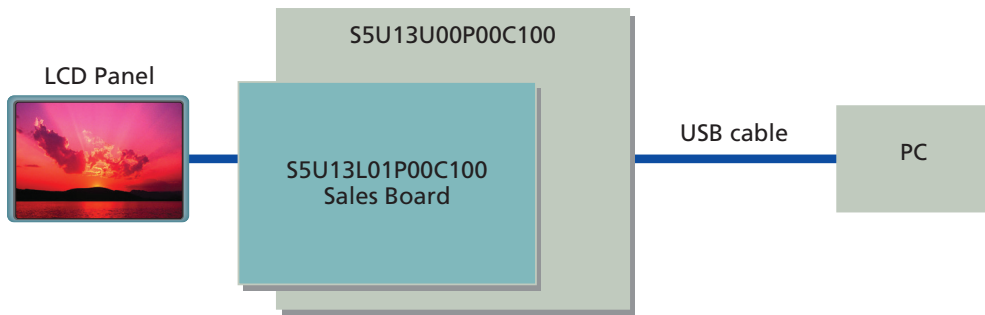

#### Checked available panel:

Newhaven Display International, Inc.  
NHD-4.3-480272EF-ATXL# (WQVGA)

Kyocera  
TCG043WQLBAANN-GN00 (WQVGA)

KOE  
TX11D06VM2APA (WQVGA)





# Display Controller Product Line up

# ASSPs


## ■ LCD Controller with External VRAM

LCD controller for application in a wide range of small- to large-size panel types.


This product is most suitable for the display control of OA or FA equipment operation panels as well as for in-vehicle devices.

Product	CPU Interface Support	LCD Interface Support				Color Depth (Max.)	External Memory Capacity	Supply Voltage		Additional Features	Package
		Monochrome STN	Color STN	TFT	Typical Resolution			Core	IO		
S1D13513F01A	16-bit I/F, Direct addressing, Indirect addressing, Serial I/F	8-bit	8-bit	18-bit	XGA	MSTN:64 grayscale CSTN:256K colors TFT:256K colors	Up to 16MB SDRAM	1.65V to 1.95V	3.0V to 3.6V	2D Sprite, 2D BitBLT	QFP22-208
S1D13513B01B	16-bit I/F, Direct addressing, Indirect addressing, Serial I/F	8-bit	8-bit	18-bit / 24-bit	XGA	MSTN:64 grayscale CSTN:256K colors TFT:16M colors	Up to 64MB SDRAM	1.65V to 1.95V	3.0V to 3.6V	2D Sprite, 2D BitBLT	PBGA1U-256
S1D13515F00A B00B	16-bit I/F, Direct addressing, Indirect addressing, Serial I/F	n/a	n/a	18-bit / 24-bit	XGA	16M colors	Up to 64MB SDRAM	1.65V to 1.95V	3.0V to 3.6V	Prewarping Embedded RISC CPU	QFP22-256 PBGA1UC256
S1D13517F00A	8-bit /16-bit I/F Indirect addressing	n/a	n/a	18-bit / 24-bit	SVGA	16M colors	Up to 16MB SDRAM	2.3V to 2.7V	3.0V to 3.6V	PinP $\alpha$ -Blend	QFP15-128


## ■ S1D13517 Block Diagram

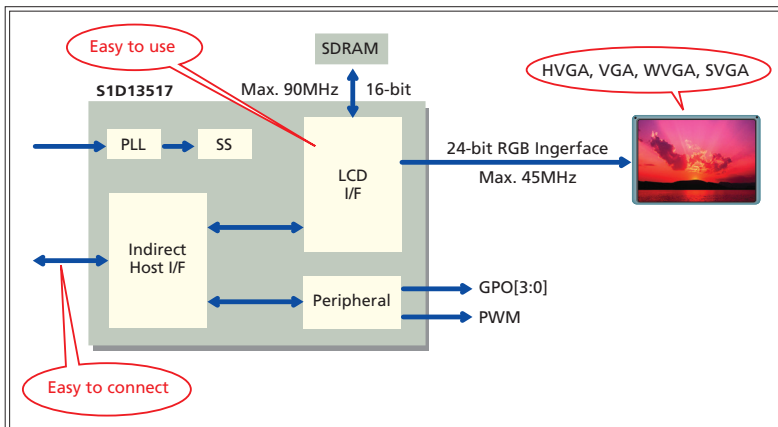


## ■ S1D13517 Evaluation Board (S5U13517P00C100)

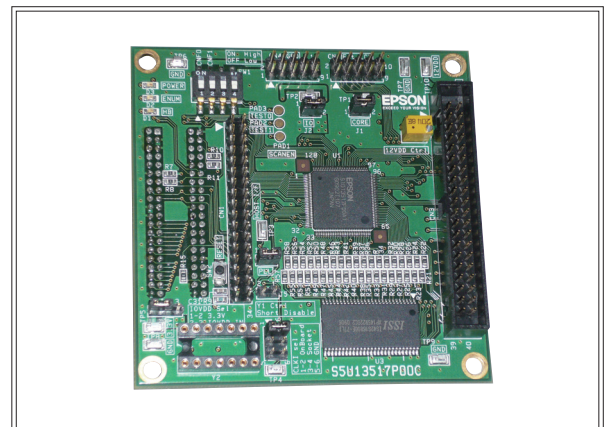

## ■ S1D13513 Block Diagram

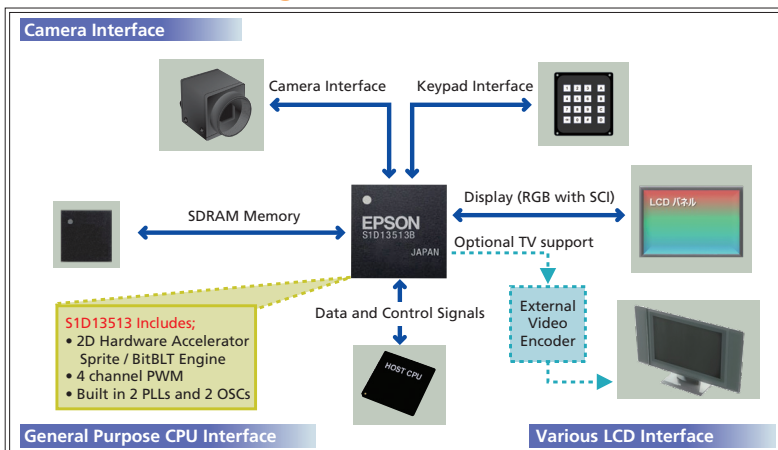

## ■ S1D13513 Evaluation Board (S5U13513P00C100)

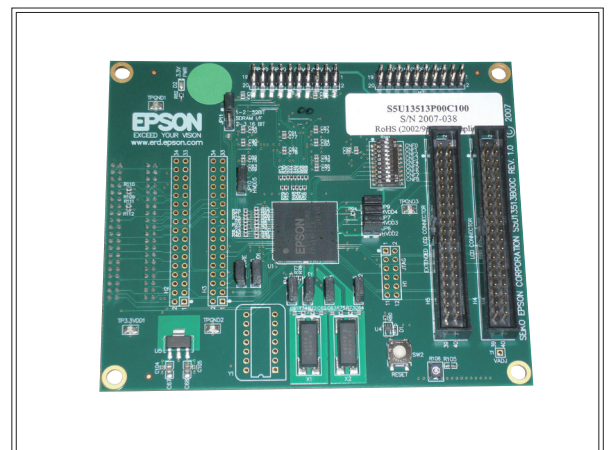

## Display Controller Product Line up

### ■ LCD Controller Supporting Camera Interface

With the installation of a camera interface, this LCD controller can display camera images on the panel without placing load on the CPU. This product is most suitable for the display control of a wide variety of applications such as mobile terminals and security devices.

Product	CPU Interface Support	LCD Interface Support		Color Depth (Max.)	Internal Memory Capacity	External Memory Capacity	Camera (pixel)	JPEG Codec	Supply Voltage		Additional Features	Package
		TFT	Typical Resolution						Core	IO		
S1D13515F00A B00B	16-bit I/F, Direct addressing, Indirect addressing, Serial I/F	18-bit / 24-bit	XGA	16M colors	0	Up to 64MB SDRAM	0.3MP	n/a	1.65V to 1.95V	3.0V to 3.6V	Prewarping Embedded RISC CPU	QFP22-256 PBGA1UC256
S1D13719B00B	16-bit I/F, Direct addressing, Indirect addressing	18-bit / 24-bit	QVGA	16M colors	512KB, SRAM	n/a	2.0MP	Encode/Decode	1.65V to 1.95V	2.30V to 3.25V	2D BitBLT, SwivelView, SD memory card I/F	PFBA10U-180

### ■ In-vehicle LCD Controller

In our line-up of display controller products, this controller complies with in-vehicle quality.

Product	CPU Interface Support	LCD Interface Support				Color Depth (Max.)	Internal Memory Capacity	External Memory Capacity	Camera (pixel)	JPEG Codec	Supply Voltage		Temperature Range	Additional features	Package
		Monochrome STN	Color STN	TFT	Typical Resolution						Core	IO			
S2D13719F00A	16-bit I/F, Direct addressing, Indirect addressing	n/a	n/a	18-bit / 24-bit	QVGA	16M colors	512KB, SRAM	n/a	2.0MP	Encode/Decode	1.65V to 1.95V	2.3V to 3.6V	-40 to +105°C	2D BitBLT, SwivelView, SD memory card I/F	QFP22-208

### ■ Memory Display Controller

This product is for various memory display (color and B/W) available in the market. It has graphic acceleration hardware and voltage generators for memory displays. Its low power but powerful graphic features are suitable for wearable products.

Products	CPU Interface Support	Panel Interface Support	Color Depth (Max.)	Internal Memory Capacity	Supply Voltage	Additional Features	Package
S1D13C00F00C B00C	SPI, QSPI, Indirect 8-bit	6-bit color MIP, 3-bit or 1-bit Memory LCD with SPI	64 colors	96KB	1.8V to 5.5V	RTC, SPI, QSPI, I <sup>2</sup> C, DMAC, Sound Generator, IR remote control transmitter	TQFP13-64 WCSP64

### ■ USB Interface LCD Controller

LCD controller allowing for reception of display data and transmission of touch-screen coordinate data at high speed via USB2.0-HS. Most suitable for application to OA equipment such as multi-functional printers with long lengths of cabling between the host CPU and LCD panel, and to in-vehicle devices such as rear entertainment displays.

Product	CPU Interface Support	LCD Interface Support				Color Depth (Max.)	Internal Memory Capacity	External Memory Capacity	Supply Voltage		Additional Features	Package
		Monochrome STN	Color STN	TFT	Typical Resolution				Core	IO		
S1D13U11F00A	USB2.0 HS	n/a	n/a	18-bit / 24-bit	SVGA	16M colors	0	Up to 16MB SDRAM	1.65V to 1.95V	3.0V to 3.6V	PinP α-Blend	QFP20-144

# Display Controller S1D13513

# ASSPs

## ■ Overview

The S1D13513 is a highly integrated Display Controller capable of outputting to LCD or TV. With the flexibility of an external SDRAM memory interface, this low cost, low power, device supports a wide range of CPUs, panels, and a camera port that can be configured as 2x 8-bit ports. The S1D13513 feature set and architecture are designed to meet the requirements of embedded systems such as Mobile Communications, Hand-Held PC's, Office Automation, and Automotive applications.

The S1D13513 features both Sprite and 2D BitBLT engines designed to reduce the load on the Host, while increasing the performance of graphics intensive operations. Additionally, the S1D13513 offers such features as multiple windows, alpha blending, gamma correction, and mirror/rotation function which allow user configurability of various images on the Main/PIP1/PIP2 displays. While focusing on devices targeted by the Microsoft Windows CE Operating System, the S1D13513's impartiality to CPU type or operating system makes it an ideal display solution for a wide variety of applications.

## ■ Example of Application

### External Display Buffer

- Uses external SDRAM or mobile SDRAM as display buffer
- Supports x16 / x32 SDRAM interface (Size: 8M byte, 16M byte, 32Mbyte or 64Mbyte) (x32 and 32/64Mbyte not supported for QFP package)
- SDRAM clock: 100MHz Maximum
- Automatic re-entry into self refresh mode
- Provides linear access to first 1M bytes and four configurable 256KB windows into the remaining memory


### Display Support

- RGB Interface single panel
  - 16/18/24-bit Color TFT (24-bit not supported for QFP)
  - Optional serial command interface
- 8-bit Monochrome passive panel
- 8-bit Color Type 2 passive panel
- YUV Digital Output (YUV 4:2:2) which supports NTSC/PAL TV Output via an external Video Encoder
- Color Depths up to 32 bpp
- Example resolutions
  - S1D13513F: 1024x768 at a color depth of 18 bpp
  - S1D13513B: 1024x768 at a color depth of 24 bpp

### Display Features

- Multiple window (layer) support
- Mirror and 180° rotation functions
- Double Buffering support
- Alpha Blending
- Gamma Correction
- Pseudo Color Expansion
- Hardware cursor support via the Sprite engine
- Camera image can be displayed on the PIP1/PIP2 window
- Interrupts available
  - Supports maskable non-display (Vsync) interrupt
  - Supports delayed version of Vsync Interrupt

## ■ System Block Diagram

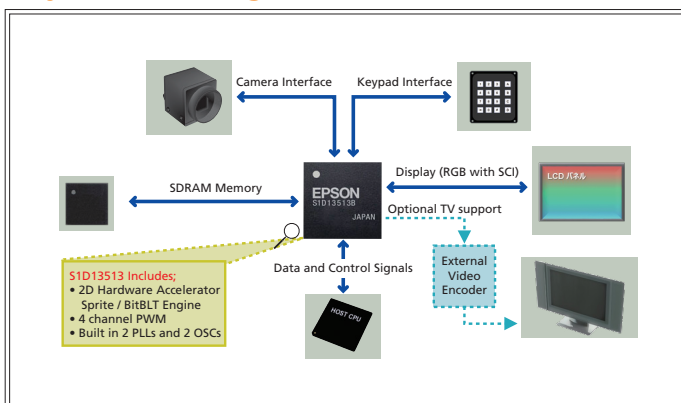

### CPU Interface

- Direct and indirect interface support for most popular CPU interfaces
- Serial Host Interface
- Supports 20-50MHz Host bus clock
- Registers are memory-mapped - M/R# input selects between memory and register address space

### Digital Video

- Dual Camera / Video Input port can be configured as 2x 8-bit camera ports
  - Supports ITU-R BT656 (CCIR-656) YUV format
  - Supports resize function of the video in stream
  - Supports raw JPEG capture from JPEG capable camera
- Captures YUV data into SDRAM as YUV 4:2:2 format
- View Image can be displayed to LCD or TV
- Resize function built-in for both View and Capture path

### Acceleration

- 2D BitBLT Engine (Read, Write, Move, and Fill BLTs)
- 2D Sprite Engine (up to 16 sprites)
- Unified Command FIFO for both BitBLT and Sprite

### Miscellaneous

- Internal system clock: 50MHz maximum (half of SDRAM clock)
- 4 channel PWM for backlight control
- I<sup>2</sup>C Interface (typically used for camera)
- Keypad Interface with 5 x 5 matrix support
- Software initiated power save mode
- Multiple General Purpose IO pins
- Flexible clock structure:
  - Two embedded PLLs
  - Two built-in crystal inputs
  - Four digital clock inputs
  - Clocks dynamically turned off when modules are not needed
- COREVDD 1.8 volts and IOVDD 3.3 volts
- Package: S1D13513F: QFP 208-pin  
S1D13513B: BGA 256-pin

## ■ Package

PKG type	Body size (mm)	Lead pitch / Ball pitch (mm)
QFP22-208	28x28x1.4	0.5
PBGA1UC256	17x17x1.3	1.0

## ■ Overview

The S1D13U11 is a color LCD graphics controller with an external SDRAM display buffer. The S1D13U11 supports a USB2.0 High-speed device port interface while providing high performance bandwidth to external SDRAM, allowing for fast screen updates. The S1D13U11 supports displays up to 800x600@24bpp with added display functions such as Picture-in-Picture, Double-buffer and Display scroll.

Additionally the S1D13U11 supports I<sup>2</sup>C and two SPI serial interfaces. It can be connected to an external touch screen controller and serial flash ROM. The S1D13U11 is the best choice of LCD controller to connect between host CPU and LCD panel via the USB port.

## ■ Features

- External 16/64/128M-bit SDRAM memory support
- USB2.0 High-speed device port (480Mbps)
- Embedded USB protocol sequencer
- High performance SDRAM controller
- Input data formats: RGB 8:8:8, RGB 5:6:5
- Active Matrix TFT interface: 16/18/24-bit interface
- Supports resolutions up to 800x600 @ 24bpp
- I<sup>2</sup>C master and two SPI master interface
- Main and two Picture-in-Picture display window
- Multi-buffer display or Double-buffer display
- PWM output for LED backlight control
- Buzzer output for touch screen input
- Internal 12M/24M oscillator and PLL
- 8x8 Hardware Key scan interface
- 1.8 volts and 3.3 volts power
- QFP20-144 (20mm x 20mm x 1.7mm)

## ■ Description

### Host CPU Interface

- USB2.0 High-speed device port (1-port)
  - HS (480Mbps) and FS (12Mbps) transfer support
  - Embedded FS/HS termination
- Endpoint
  - Five embedded endpoint FIFO
- Embedded Protocol sequencer
  - 23 kinds of USB protocol command
  - Device class: Vender class
  - Protocol control data (need the download via USB port or external serial flash ROM)

### Frame Buffer

- External 16M/64M/128M-bit SDRAM memory
  - Maximum 96MHz SDRAM clock
  - 16-bit bus width

### Input Data Format

- RGB 8:8:8, RGB 5:6:5

### Display Support

- Active Matrix TFT
  - 16/18/24-bit interface
- Supports resolution up to 800x600 (SVGA)@24bpp
  - QVGA, WQVGA, HVGA, VGA, WVGA

### Display Features

- 24 bit-per-pixel (bpp) or 16bpp color depths
- Two Picture-in-Picture window
- Software multi-buffer, Hardware double-buffer display
- Virtual display with smooth scroll

### Peripherals

- I<sup>2</sup>C master interface
- Two SPI master interface
- Key scan interface (8x8, 8x4 or 8x2)
- PWM output for LED backlight control
- Buzzer output for touch screen input


### Clock Source

- 12MHz or 24MHz X'tal oscillator
- Internal programmable PLL (Maximum 96MHz)
- LCD pixel clock (Maximum PCLK = 48MHz)
- SDRAM clock (Maximum SDCLK = 96MHz)

### Miscellaneous

- USBVDD 3.3 volts, IOVDD 3.3 volts and CORE/PLLVD 1.8 volts
- QFP20 144-pin package (20mm x 20mm x 1.7mm)

## ■ System Block Diagram

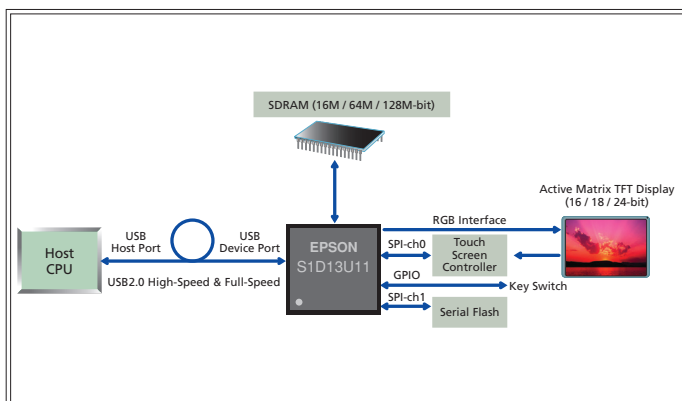

## ■ Package

PKG type	Body size (mm)	Lead pitch / Ball pitch (mm)
QFP20-144	20x20x1.7	0.5

# Display Controller S1D13517

# ASSPs

## ■ Overview

The S1D13517 is a color LCD graphics controller which uses an external SDRAM display buffer. The S1D13517 supports an 8/16-bit indirect host interface while providing high performance bandwidth to external SDRAM, allowing for fast screen updates.

The S1D13517 supports displays up to 960x540 (QHD) @ 24 bpp or 800x600 (SVGA)@ 24bpp, controlling a main the window and up to two Picture-in-Picture windows. Additionally, the S1D13517 is designed with a 2D Graphics Engine with Alpha Blending. The S1D13517 uses a double-buffer architecture to prevent any visual tearing during streaming video screen updates.

## ■ Features

- Easy to use, Easy to connect
- External 16M-bit, 64M-bit or 128M-bit SDRAM
- High performance SDRAM controller
- 8/16-bit asynchronous indirect parallel interface (used for display or register data)
- Input data formats: RGB 8:8:8, RGB 5:6:5
- Active Matrix TFT interface: 18/24-bit interface
- Supports resolutions up to 960x540 or 800x600
- Software Power Save mode
- Main Display Window with two Picture-in-Picture windows
- 180° hardware rotation and mirror of display image
- Double-Buffer available to prevent image tearing during streaming input
- PWM output for LCD backlight control
- Internal programmable PLL
- SS (Spread spectrum) clock available
- General Purpose Output pins

## ■ Description

### Frame Buffer

- External 16M-bit, 64M-bit or 128M-bit SDRAM memory support
  - Maximum 90MHz SDRAM clock
  - 16-bit bus width
  - Maximum 16-Buffer separation available

### Host Interface

- 8/16-bit asynchronous parallel interface (used for display or register data)
  - Indirect addressing Intel80 interface
  - Burst and rectangular write available for memory

### Input Data Format

- RGB 8:8:8, RGB 5:6:5

### Display Support

- Active Matrix TFT
  - 18/24-bit interface
- Supports resolution up to 960x560 (QHD)
  - HVGA, VGA, WVGA, SVGA

### Power

- COREVDD 2.5 volts, PLLVDD 2.5 volts and IOVDD 3.3 volts

### Display Features

- 24 bit-per-pixel (bpp) color depths
- Display window
- Two Picture-in-Picture windows
- 2D graphics engine (Alpha blending, Copy)
- 180° hardware rotation and mirror of display image.
- Double-Buffer available to prevent image tearing during streaming input
- Software Multi-Buffer available for simple animation
- TE (Tearing Effect) output


### Clock Source

- Internal programmable PLL (Maximum 180MHz)
- Spread Spectrum clock available for PCLK and SDCLK (note: frequency: 31MHz to 80MHz)
- LCD pixel clock (Maximum PCLK = 45MHz)
- SDRAM clock (Maximum SDCLK = 90MHz)

### Miscellaneous

- PWM output for LCD backlight control
- Software Power Save mode
- General Purpose Output pins are available (GPO[3:0])
- QFP15 128-pin package (14mm x 14mm x 1.7mm)

## ■ System Block Diagram

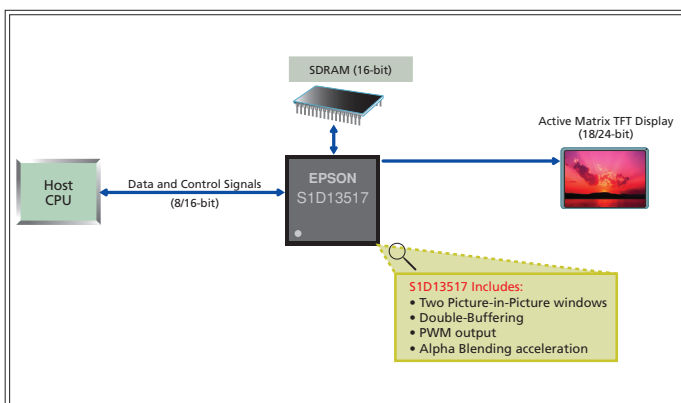

## ■ Package

PKG type	Body size (mm)	Lead pitch / Ball pitch (mm)
QFP15-128	14x14x1.7	0.4

## ■ Overview

The S1D13781 is a simple, multi-purpose Graphics LCD Controller with 384KByte embedded SRAM display buffer which supports both RGB interface TFT and CSTN panels. The S1D13781 supports most popular CPU interfaces in both 8/16-bit and Direct/Indirect variations. The embedded display buffer allows WQVGA up to 480x272 at 24bpp or 800x480 8bpp for single layer display, or 480x272 at 16bpp (Main Layer) and 480x272 at 8bpp (PIP Layer) for two layer display.

The S1D13781's combination of multiple CPU interfaces and display interface types offers a versatile, yet easy to develop display system. Additionally, it offers Multiple Window support, Transparency and Alpha Blending functions, as well as 2D BitBLT functions. It is a flexible, low cost, low power, single chip solution designed to meet the demands of embedded markets such as low end IP phone devices where total system cost and battery life are major concerns. It's impartiality to CPU type or operating system also makes it an ideal display solution for a wide variety of other applications such as Office Automation and Factory Automation applications.

## ■ Description

### CPU Interface

- Support for most popular CPU interfaces
- Direct/Indirect Addressing
- 8/16-bit interface support
- SPI

### Display Support

- Single panel implementation can be:
  - RGB Interface TFT panel
  - Color and Monochrome STN
- Programmable resolutions up to 800x480@8bpp
- Programmable color depths up to 24 bpp

### Display Features

- Multiple Window (Layer) support for Main and PIP
- Alpha Blending and Transparency
- PIP Flashing
- LUT 256wordx24-bitx3pcs for both Main and PIP layer
- Rotation (Swivel View) 90°/180°/270°


### 384KByte Embedded Memory

- Maximum Resolution for WQVGA:
  - 1 layer: 480x272 at 24bpp or 800x480 at 8bpp
  - 2 layer: Main 480x272 at 16bpp and PIP 480x272 at 8bpp

### Miscellaneous

- 2D BitBLT
- Internal System Speed: TBD
- Software initiated power save mode
- Multiple General Purpose IO pins
- Flexible clock structure:
  - Embedded PLL
  - Digital clock inputs
- Operating Temperature Range: -40° to 85°
- Low Operating Voltage:
  - PLL/COREVDD 1.5 volts and
  - PIO/HIOVDD 3.3 or 1.8 volts
- Package: QFP 100-pin, 0.5mm pin pitch


## ■ System Block Diagram

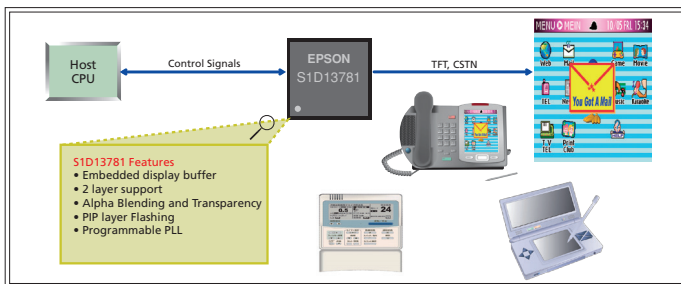

## ■ Package

PKG type	Body size (mm)	Lead pitch / Ball pitch (mm)
QFP15-100	14x14x1.7	0.5

## ■ Example of Display Features

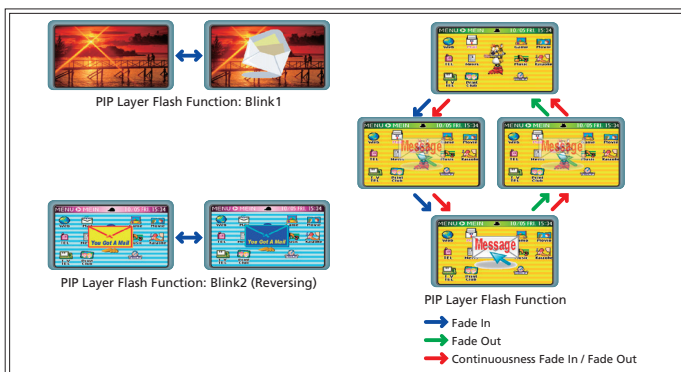


# Display Controller Reference Design

# ASSPs

## ■ S5U13781R01C100 Shield TFT Board Overview

The **Epson S5U13781R01C100 Shield TFT Board** connects to an Arduino Due board to provide support for up to WQVGA TFT graphics. It includes two FPC connectors (40-pin and 54-pin) which can be used to connect to a WQVGA or QVGA TFT panel available separately. Epson provides a software library for use with the Arduino Sketch IDE with hardware IO, simple graphics, and text drawing functions.

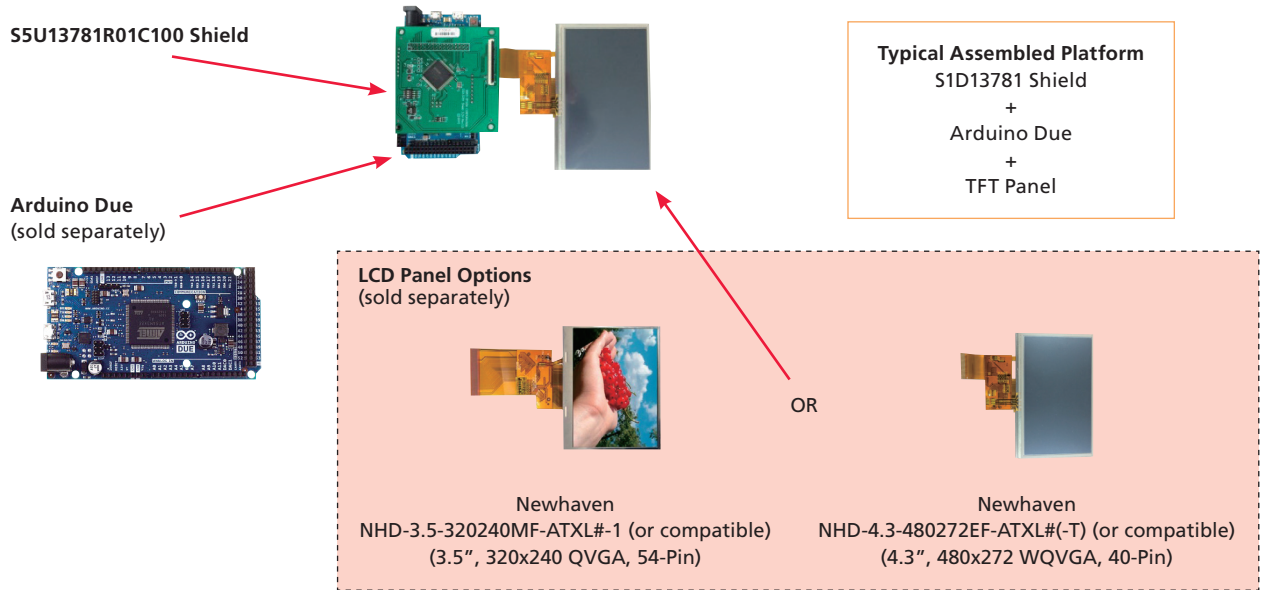


## ■ S5U13781R01C100 Shield TFT Board Hardware Description

The S5U13781R01C100 Shield TFT Board adds support for up to WQVGA TFT graphics to the Arduino Due. It is designed to provide evaluation of the S1D13781 LCD controller and enables rapid prototyping on the Arduino Due board. It uses the Arduino Due's standard SPI interface, providing a simple hardware connection which is powered by the Arduino Due board. The S1D13781 Shield board includes two FPC connectors (40-pin and 54-pin) which can be used to connect a WQVGA or QVGA TFT panel, available separately.

The S5U13781R01C100 Shield TFT Board integrates a S1D13781 LCD controller which is a simple, multi-purpose Graphics LCD Controller designed to support RGB interface TFT panels. It includes a 384KByte embedded SRAM display buffer which allows up to WQVGA displays. A typical implementation is 480x272 at 24bpp, or 480x272 at 16bpp (Main Layer) and 480x272 at 8bpp (PIP Layer) for two layer display. The S1D13781 is a flexible, low power, single chip solution designed to meet the demands of embedded markets and devices where total system cost and battery life are major concerns.

The S5U13781R01C100 features:

- Simple connection with Arduino Due using SPI
- Graphics Library for use with Arduino Sketch IDE
- 40-pin FPC Connector for 480x272 TFT
- 54-pin FPC Connector for 320x240 TFT
- LED Backlight Driver included on Shield board
- 3.3V IO
- Integrated Epson S1D13781 LCD Controller with:
  - 384KByte Embedded Memory
  - Multiple Window (Layer) support for Main and PIP
  - Rotation (SwivelView™) 90°, 180°, 270°
  - Alpha Blending, Transparency, Flashing

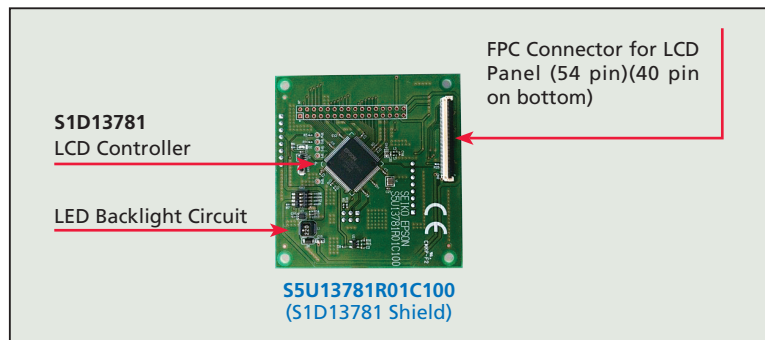

Note: The S1D13781 Shield TFT Board can also be used to evaluate the low cost S1D13L01 LCD Controller which shares the same features as the S1D13781 except for BitBLT functionality. Refer to the S1D13781 and S1D13L01 Hardware Specifications for a complete feature list.

## ■ S5U13781R01C100 Shield TFT Board Software Library

The S5U13781R01C100 Shield Graphics Library is designed for use with the Arduino Sketch IDE. It provides hardware access/control and simple graphics routines which enable users to quickly display graphics and text to a TFT panel connected to the S5U13781R01C100 Shield TFT Board.


The S5U13781R01C100 Shield Graphics Library consists of a collection of C++ methods organized into 2 classes which provide hardware IO access to the S1D13781, simple graphics functions such as pixel draw, line draw, and rectangle draw, and basic text display using a customizable font.

Full source code and documentation is provided allowing easy customization and modification by the user.

Graphics Library Functions:

- Direct Hardware Access – routines for Register and Memory IO, and functions to control S1D13781 features
- Fill Window – fills the display with a selected color
- Draw Pixel – draws pixel at specified x,y location using selected color
- Draw Line – draws line between specified x,y locations using selected color
- Draw Rectangle – draws rectangle (or filled rectangle) using selected color
- Draw Text – draws text and multiline text to the specified window using a customizable font
- Copy Area – routine which uses the BitBLT function to copy image data to another area of the display

Graphics Library Example Display

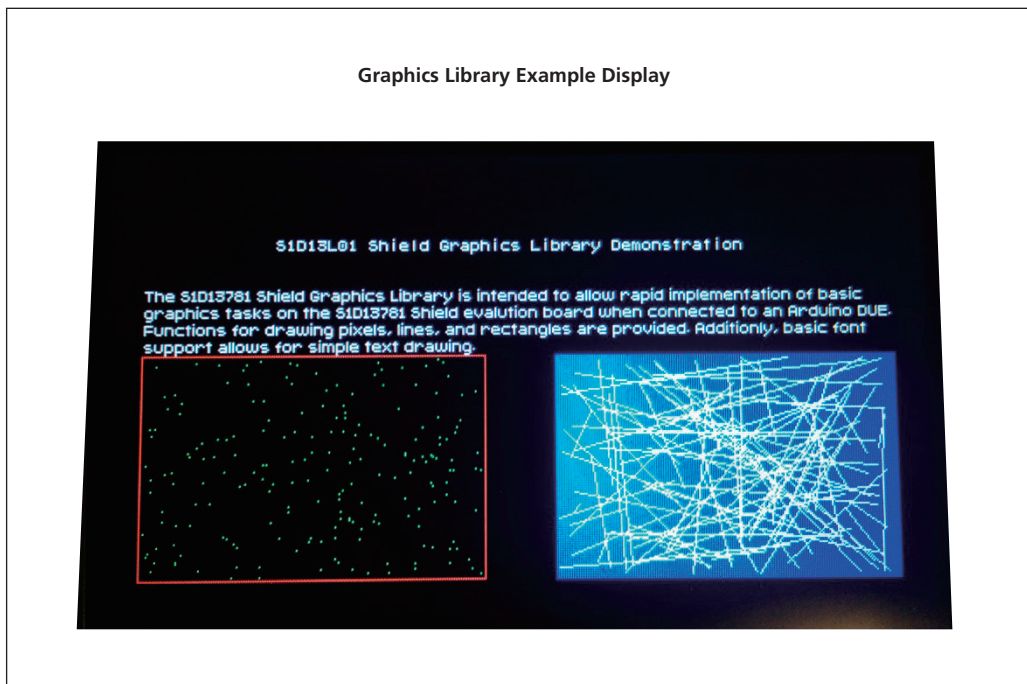



# Display Controller Reference Design

# ASSPs

## ■ S5U13781R01C100 information web site

Top page:

[global.epson.com/products\\_and\\_drivers/semicon/products/display\\_controllers/reference\\_design.html](http://global.epson.com/products_and_drivers/semicon/products/display_controllers/reference_design.html)

The screenshot shows the Epson website page for Display Controller Reference Design. The page features a navigation menu with options like 'General', 'What is LCDC', 'Demonstration Videos', 'Simple LCDC', 'Reference Designs', 'Sample Script For Evaluation Board', and 'FAQ'. The 'Reference Designs' section is active, displaying a list of reference designs for various platforms. The first design is highlighted: 'SID13781 Reference design for mbed™ compatible platforms'. Below this, there is a summary section for this design, stating that the S5U13781R01C100 Shield TFT Controller board can be used with some mbed™ compatible platforms. The summary also mentions that mbed is a well-known software platform for ARM® based microcontrollers.

GLOBAL

EPSON

Home > Epson electronic devices worldwide & Sales network > Microdevices > Semiconductors > Products > Display Controllers > Reference Designs Semicon SiteMap

Display Controllers Sales & Support

General What is LCDC Demonstration Videos Simple LCDC **Reference Designs** Sample Script For Evaluation Board FAQ

Reference Designs

- SID13781 Reference Design for mbed™ compatible platforms
- SID13781 Reference Design for open source hardware platform Arduino®Due
- SID13517 Reference Design using Microchip PIC32
- SID13781 Reference Design using ST-Micro
- SID13513 Reference Design using Freescale Kinetis
- SID13781 Reference Design using TI Tiva C series and MSP430 series

**SID13781 Reference design for mbed™ compatible platforms**

The S5U13781R01C100 Shield TFT Controller board with an integrated Epson SID13781 LCD controller can be used with some mbed™ compatible platforms.

**Summary**

mbed is a well-known software platform for ARM® based microcontrollers. It provides the tools and developer ecosystem necessary to create standards-based solutions for any kind of application, but with particular focus on Industrial applications. Further information is available on the mbed website at [www.mbed.com](http://www.mbed.com).

## Camera Interface Product Line up


### ■ In-vehicle Multi-Camera Interface IC

An interface IC that synthesizes input images from multi-channel analog cameras and outputs the images.


This product complies with in-vehicle quality requirements. Most suitable for security-related applications such as monitoring cameras and in-vehicle camera systems.

Product	Host CPU Interface	Function	Temperature Range	Supply Voltage		Package
				Core	IO / Analog	
S2D13P04F00A S2D13P04B00B	I <sup>2</sup> C SPI	Including four channels of NTSC/PAL decoders 8-bit digital output (supporting ITU-R BT656) Equipped with multi-image synthesis mode Distortion correction function	-40°C to +85°C	1.65V to 1.95V	3.0V to 3.6V	QFP15-100 PFBGA10U-121
S2S65P10F00A	I <sup>2</sup> C	8-bit digital output (supporting ITU-R BT656) Equipped with multi-image synthesis mode	-40°C to +105°C	1.8V±0.15V	2.4V to 3.6V (IO)	QFP15-100

### ■ S2D13P04 System Configuration Example

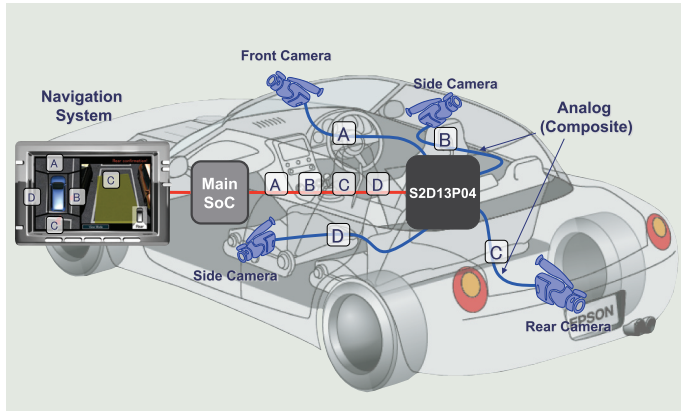

### ■ S2D13P04 Evaluation Board (S5U13P04P00C100)

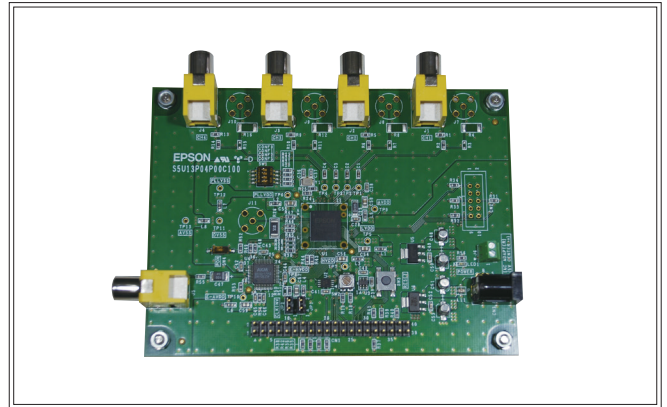

# Camera Interface S2D13P04

# ASSPs

## ■ Overview

The S2D13P04 is a camera interface IC suitable for on-board camera systems.

The S2D13P04 is integrated with four-channel video decoders to connect four analog cameras simultaneously. The internal VRAM synchronously outputs the asynchronously input image data of each camera. This product is also equipped with image processing functions, such as composition of the image data of the four cameras, distortion correction and interlaced/progressive conversion.

Since the S2D13P04 is equipped with a built-in large capacity VRAM, it is not necessary to connect an external RAM.

## ■ Features

### Video Input

- Video Decoder: 4 channels
- Analog Video (CVBS) Input: 4 inputs
- NTSC-M, NTSC-J
- PAL-M
- PAL-B, PAL-D, PAL-G, PAL-I, PAL-N

### Video Output

- Digital Output: 8 bit YCbCr422(With synchronized signal)  
ITU-R BT.656 \*1
- Interlaced Output \*2, 3
- Progressive Output

### Video Output Mode

- Fixed Mode
- Auto Scan Mode \*4
- Merge Mode \*2
- Compression Mode \*2, 4

### Image Processing

- Scaler Function
- Interlaced/Progressive Conversion
- Distortion Correction \*3, 4

### Output at Stable Frame Rates

- 720×480i 30fps (NTSC interlaced output)
- 640×480p 30fps (NTSC progressive output)
- 640×480p 30fps (NTSC with distortion correction ON)
- 720×576i 25fps (PAL interlaced output)
- 768×576p 25fps (PAL progressive output)
- 640×480p 25fps (PAL with distortion correction ON)

### Host Interface

- I<sup>2</sup>C Interface (Slave)
- SPI Interface (Slave)
- External RAM not required
- Guaranteed Operation Temperature: -40 to +85 °C (Ta)

### Operating Voltage

Analog: 3.3 ± 0.3 V; IO: 3.3 ± 0.3 V  
Core: 1.8 ± 0.15 V, PLL: 1.8 ± 0.15 V

### Packages

- S2D13P04B00B100  
PFBGA10UX121 (10 mm × 10 mm × 1.2 mm, 0.8 mm pitch)
- S2D13P04F00A100  
QFP15-100pin (14 mm × 14 mm × 1.7 mm, 0.5 mm pitch)


\*1: The number of the pixels per line may not comply with the ITU-R BT.656 standard.

\*2: In Merge Mode and Compression Mode, outputs are compatible with interlaced output.

\*3: When the distortion correction is ON, interlaced output is not supported.

\*4: The Auto Scan Mode and Compress Mode are not supported with the distortion correction function.


## ■ Block Diagram

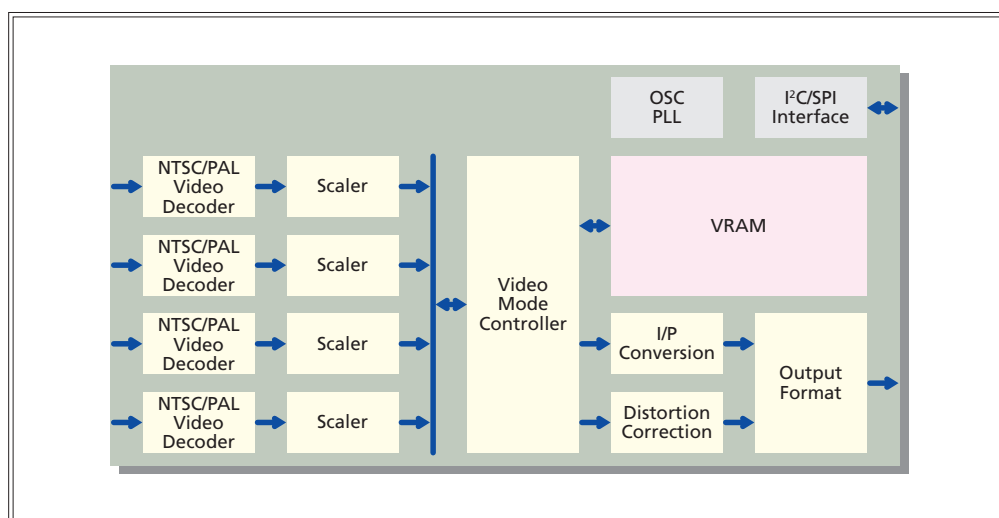

Epson provides the integrated support of sound including **♪Voice** and **Music♪**.  
Turn to Epson for all sound-related products.

## ■ Speech & Audio Product Line up

	S1V3F351	S1V3F352	S1V3G340
<b>Functional Information</b>			
Sound Flash	Approx 30sec	Approx 80sec	-
External SPI-Flash I/F	supported(up to 16MB)		
Sound Data streaming	-	-	supported
Sound Play Algorithm	EOV(EPSON Original High Compress & High Quality Format) / 16bit PCM		EOV(EPSON Original High Compress & High Quality Format)
Sound Play channels	2ch Mixing Play(e.g. Ch.0:Voice, Ch.1:BGM)		1ch
Sampling Frequency	15.625kHz(Suitable for Back Ground Music)		16kHz(Suitable for Back Ground Music)
Bitrate	EOV:16/24 kbps	EOV:16/24/32/40 kbps	EOV:16/24/32/40 kbps
Multi-SoundROM	supported		-
Gapless Sound Play	supported		
Volume Setting	supported(0db to -63.0db:0.5db step, silence)		supported(-48 to +18db:1db step, silence)
Repeat Setting	supported(1 to 254 times, repeat until stop command) * 1 to 127 times for sound playback in standalone mode		supported(1 to 65534 times, repeat until stop command)
Voice Speed Conversion	75% - 125% (5% step)		-
Voice Pitch Conversion	90% - 110% (5% step) * Not available with mixing	-	-
Tone Generation	supported	supported	-
Buzzer Voice/Melody	supported		-
Record/play	supported		-
<b>Hardware Information</b>			
Host Interface	SPI/UART/I2C		
Standby mode	supported		
ADC for record	supported		-
Internal Oscillator	supported		-
Ext Oscillator circuit	supported(16MHz)		supported(32.768kHz)
Operation power supply	1.8v to 5.5v		
SPI-Flash power supply	supported(>3.3v)		-
Flash Programming	2.2 to 5.5 V	2.4 to 5.5 V	-
Package	P-TQFP048-0707-0.50(0.5mm pitch)	P-TQFP048-0707-0.50(0.5mm pitch)	P-LQFP048-0707-0.50(0.5mm pitch) P-VQFN048-0707-0.50(0.5mm pitch) P-LQFP052-1010-0.65(0.65mm pitch)

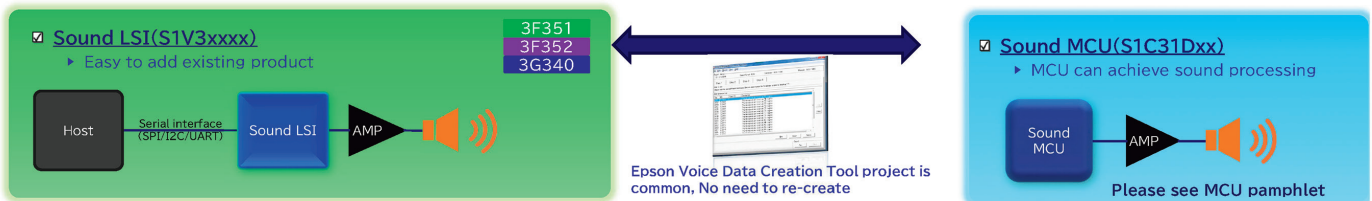

**Epson Voice Data Creation PC Tool**

- ▶ Easy to create Sound data even for a first-time user
- ▶ Easy to change/add (Suitable for Frequently/Emergency)
- ▶ No cost to create Voice data(No need studio, narrator fee)
- ▶ Existing wav files can be imported to the tool easily

**Asia**

- ✓ Japanese
- ✓ Chinese
- ✓ Korean


**America**

- ✓ US English
- ✓ American Spanish
- ✓ Canadian French

**Europe**

- ✓ British English
- ✓ German
- ✓ French
- ✓ Spanish
- ✓ Italian
- ✓ Russian

**3F351**  
**3F352**  
**3G340**

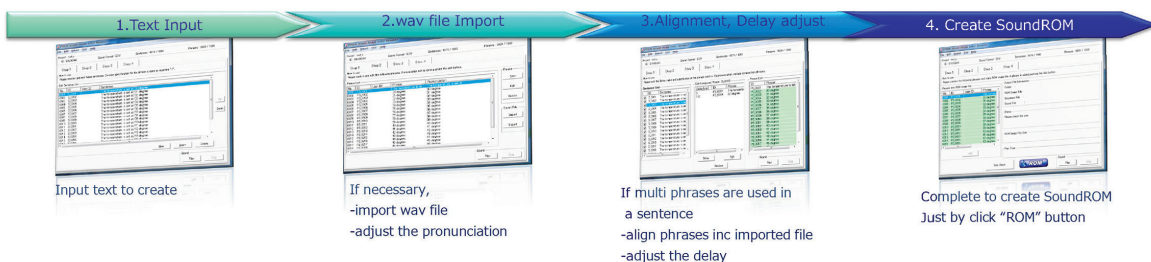

- ☑ **Realtime Voice Speed/Pitch Conversion**
  - ▶ Providing ease of listening to individual end users
- ☑ **produce a sense of luxury by 2ch Mixing Play**
  - ▶ Voice play with background music.



☑ **Realtime Voice Speed Conversion**

slow (115%) **3F351**  
 normal (100%) **3F352**  
 fast (85%)

☑ **Realtime Voice Pitch Conversion**

low (90%) **3F351**  
 normal (100%)   
 high (110%)

☑ **2ch Mixing play**

- ☑ **High Quality & High Compression Sound Algorithm**
  - ▶ 1/4 size comparison with same sampling frequency(16kHz)
  - ▶ Small size(2/3) comparison with even low sampling frequency(8kHz)
  - ▶ Many sound data, long music can be stored.
  - ▶ Multiple language can be integrated.

**Epson High Compress & High Quality Algorithm**

**ADPCM** High Compress & High Quality Algorithm **EOV**

Sound ROM Size

Same Sampling Frequency(16kHz) : 1/4 size

Low Sampling Frequency(8kHz) : 2/3 size

Format	sampling rate	ADPCM bit	bitrate	Speech time						
				1 [min]	2 [min]	3 [min]	4 [min]	5 [min]	10 [min]	
others	ADPCM	16 [kHz]	4 [bit]	64 [kbps]	480 [kB]	960 [kB]	1,440 [kB]	1,920 [kB]	2,400 [kB]	4,800 [kB]
	ADPCM	8 [kHz]	4 [bit]	32 [kbps]	240 [kB]	480 [kB]	720 [kB]	960 [kB]	1,200 [kB]	2,400 [kB]
EPSON	EOV (original)	8 [kHz]	3 [bit]	24 [kbps]	180 [kB]	360 [kB]	540 [kB]	720 [kB]	900 [kB]	1,800 [kB]
		16 [kHz]	-	16 [kbps]	120 [kB]	240 [kB]	360 [kB]	480 [kB]	600 [kB]	1,200 [kB]

- ☑ **Select Sound Output mode by a product requirement**
  - ▶ **Speaker**
  - ▶ **Buzzer**(Electromagnetic Buzzer, Piezoelectric Buzzer)

☑ **Standard:AMP + Speaker**


☑ **Balance:external circuit+ Speaker**

☑ **Buzzer:external circuit + Buzzer**

## Develop Environment

### ■ Evaluation Board

#### S1V3F351/352 Evaluation Board




- Power supplied via USB connector
- Instant audio playback with a single button press \*1
- Write/playback of customer-created audio data \*2

For more details, please contact our sales representative.

- \*1 Controlled in stand-alone mode.
- \*2 Controlled using a dedicated PC host tool.

#### S1V3G340 Evaluation Board



- Powered via USB connector
- Streaming playback of customer-created audio data available

For more details, please contact our sales representative.

### ■ Epson Voice Creation PC Tool


Using the Epson Voice Creation PC Tool, natural voice data can be created using just a PC, so there is no need to struggle with studio recording, announcement arrangement, or additional costs. Typically, only text input to the tool is enough to create the voice data. The tool also supports phrase combination, pronunciation adjustment and importing existing WAV files a customer already has.

#### [Supported Languages]

Asia: Japanese, Chinese (Mandarin), Korean

America: American English, American Spanish, Canadian French

Europe: British English, German, French, Spanish, Italian, Russian

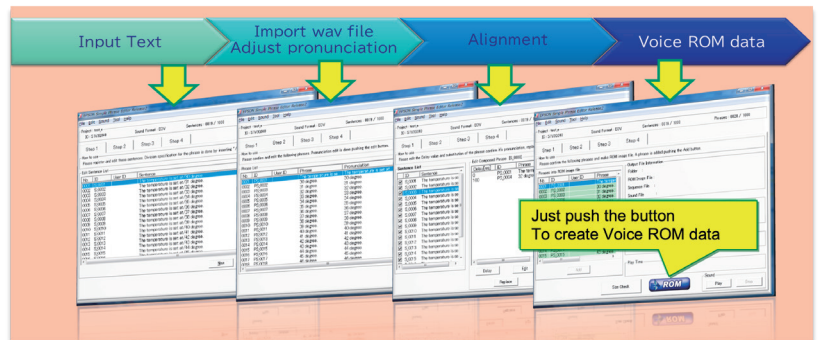

Just push the button To create Voice ROM data

## Voice Update

### ■ On-board writing tools


We offer tools for writing audio data in mass-production environments.

- General-purpose ROM Writer: AF9201/AF9201C \*Writing is possible only with a dedicated algorithm card.

- Target Models: S1V3F351/352

- Serial I/F: SPI

<Example of Writing System>



- The AF9201/AF9201C is a ROM writer manufactured by Toa Electronics. It supports programming without the need for a PC (via SPI). A dedicated algorithm card is available for S1V3F351/352.
- This setup is intended exclusively for programming the built-in flash memory.
- For more details, please contact the address below.

Toa Electronics Co., Ltd.  
Flash Support Group Company, Sales Group  
Email: support@j-fsg.com

- Sample Software: Serial I/F writing via Host


- Target Models: S1V3F351/352, S1V3G340

- Serial I/F

S1V3G340: SPI

S1V3F351/352: SPI/I<sup>2</sup>C/UART

<Example of Writing System>

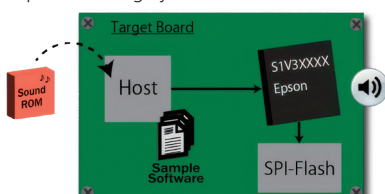

- The sample software is available from a dedicated website after purchasing the evaluation board.
- Writing to internal\* flash memory or external SPI flash memory is supported

\*Internal flash memory is available only in the S1V3F351/352 models.

# USB HUB Controller S2R72A54

# ASSPs

Specially developed for Automotive, the S2R72A54 is a USB HUB controller LSI which can be used under the highest operating temperature in the industry from  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ .

The greatest feature of this product is that stable communication can be performed even in severe environments where there are excessively long cables, many junctions and etc.

Furthermore, the S2R72A54 also supports low power consumption designs and on-board quality.

## ■ Automotive Quality

- AEC-Q100 compliant

## ■ Features

- Down stream port x 4 (HSx4)

## ■ Low Voltage Operation


- HVDD 3.3V ( $\pm 0.3\text{V}$ )

## ■ Small Size Package

- QFP48-pin 7mm x 7mm, SQFN36-pin 6mm x 6mm, SQFN36-pin 6mm x 6mm Wettable

## ■ Extensive Operating Temperature Range

- $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

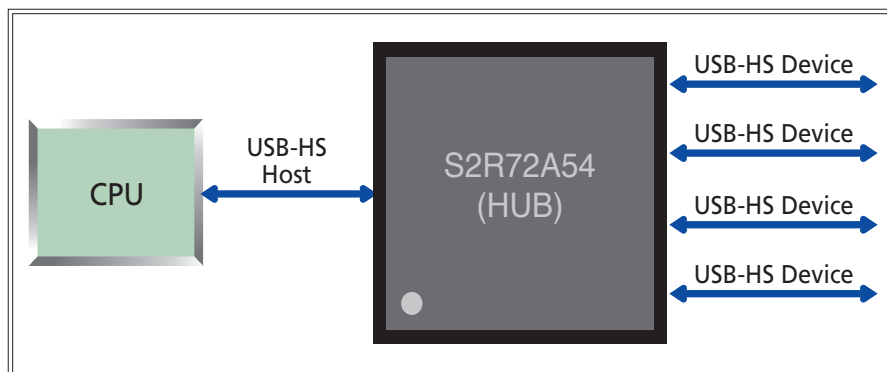

## ■ Other Groups

- S2R72A42: Down stream port x 2 (HSx2)
- S2R72A43: Down stream port x 3 (HSx2, FSx1)
- S2R72A44: Down stream port x 4 (HSx2, FSx2)

## USB Re-Synchronization IC S2R72A21

S2R72A21 is the Re-Synchronization IC which re-synchronizes the HS packet of USB 2.0 (Universal Serial Bus Specification Revision 2.0). Stable longer connection using various USB applications, such as car navigation / car display audio to the smart phone / portable audio player. S2R72A21 is complying with the automotive level grade quality and support the max temperature range up to 105°C.

### ■ Automotive Quality

- AEC-Q100 compliant

### ■ Excellent data communication characteristics (HS 480Mbps)

- HS transmission: Transmission waveform with low jitter - Support HS transmission current control
  - Support HS transmission current control
- HS reception: Very high reception tolerance

### ■ Automatic USB line monitor and control function


- HS communication: Re-synchronize with HS Synchronizer
- Except for HS communication: Passes through with analog switch

### ■ Small Size Package

- SQFN32-pin 5mm x 5mm Wettable

### ■ Extensive Operation Temperature Range

- -40°C to +105°C

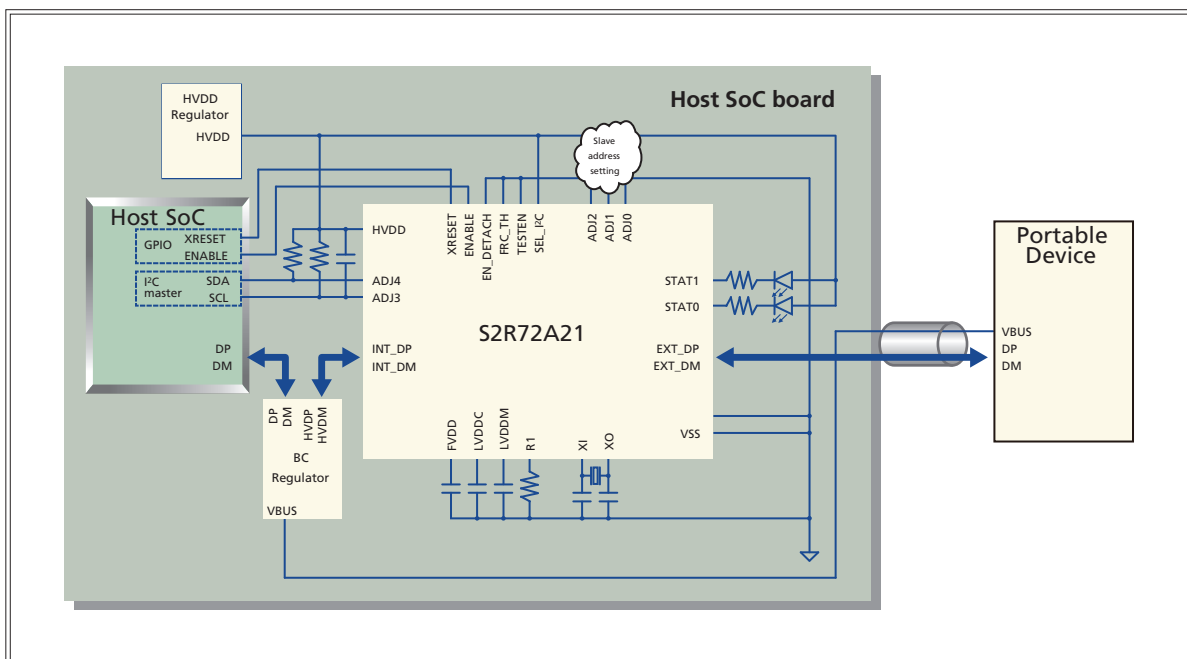



## NOTICE: PLEASE READ THE FOLLOWING NOTICE CAREFULLY BEFORE USING THIS DOCUMENT

---

The contents of this document are subject to change without notice.

1. This document may not be copied, reproduced, or used for any other purpose, in whole or in part, without the consent of the Seiko Epson Corporation (“Epson”).
2. Before purchasing or using Epson products, please contact our sales representative for the latest information and always be sure to check the latest information published on Epson’s official web sites and other sources.
3. Information provided in this document such as application circuits, programs, usage, etc., are for reference purposes only. Using the application circuits, programs, usage, etc. in the design of your equipment or systems is your own responsibility. Epson makes no guarantees against any infringements or damages to any third parties’ intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Epson is committed to constantly improving quality and reliability, but semiconductor products in general are subject to malfunction and failure. By using Epson products, you shall be responsible for your hardware. Software and systems must be designed well enough to prevent death or injury as well as any property damage even if any of the malfunctions or failures might be caused by Epson products. When designing your products using Epson products, please be sure to check and comply with the latest information regarding Epson products (this document, specifications, data sheets, manuals, Epson’s web site, etc.). When using the information included above materials such as product data, charts, technical contents, programs, algorithms and application circuit examples, you shall evaluate your products both on a stand-alone basis as well as within your overall systems. You shall be solely responsible for deciding whether or not to adopt and use Epson products.
5. Epson has prepared this document and programs provided in this document carefully to be accurate and dependable, but Epson does not guarantee that the information and the programs are always accurate and complete. Epson assumes no responsibility for any damages which you incur due to misinformation in this document and the programs.
6. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
7. Epson products have been designed, developed and manufactured to be used in general electronic applications (office equipment, communications equipment, measuring instruments, home electronics, etc.) (“General Purpose”) and applications which is individually listed in this document or designated by Epson (“Designated Purpose”). Epson products are NOT intended for any use beyond the General Purpose and Designated Purpose uses that requires particular/higher quality or reliability in order to refrain from causing any malfunction or failure leading to death, injury, serious property damage or severe impact on society, including, but not limited to those listed below (“Particular Purpose”). Therefore, you are advised to use Epson products only for General Purpose and Designated Purpose uses. Should you desire to buy and use Epson products for a Particular Purpose, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any Particular Purpose. Please be sure to contact our sales representative and obtain approval in advance.

### [Examples of Particular Purpose]

Space equipment (artificial satellites, rockets, etc.) /

Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.) /

Medical equipment / Relay equipment to be placed on ocean floor /

Power station control equipment / Disaster or crime prevention equipment / Traffic control equipment / Financial equipment

Other applications requiring similar levels of reliability as those listed above. Please be sure to contact our sales representative for details of the other applications.

8. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for developing weapons of mass destruction, or any other military purposes or applications. If exporting Epson products or our associated technologies, you shall comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A. (EAR) and other export-related laws and regulations in Japan and any other countries and follow the required procedures as provided by the relevant laws and regulations.
9. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document.
10. Epson assumes no responsibility for any damages (whether direct or indirect) incurred by any third party that you assign, transfer, loan, etc., Epson products to.
11. For more details or other concerns about this document, please contact our sales representative.
12. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

## Evaluation board/kit and Development tool important notice

---

1. Epson evaluation board/kit or development tool is designed for use for engineering evaluation, demonstration, or development purposes only. Do not use it for other purposes. It is not intended to meet the requirements of design for finished products.
2. Epson evaluation board/kit or development tool is intended for use by an electronic engineer and is not a consumer product. The user should use it properly and in a safe manner. Epson does not assume any responsibility or liability of any kind of damage and/or fire caused by the use of it. The user should cease to use it when any abnormal issue occurs even during proper and safe use.
3. The part used for Epson evaluation board/kit or development tool may be changed without any notice.

©2025 Seiko Epson Corporation All rights reserved.

---

### [Registered trademarks, trademarks, and company names]

Design Compiler® : Synopsys Inc. in U.S.A.

NC-Verilog® : Cadence Design Systems Inc. in U.S.A.


SuperFlash® : Silicon Storage Technology, Inc., in the U.S.A.

Arm and Cortex are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

*Other brand names and product names are trademarks or registered trademarks of their respective owners.*

MMP Technology

Supply of this implementation of TPL’s MMP technology does not convey a license nor imply a right under any patent, or any other industrial or intellectual property right of TPL, to use this implementation in any finished end-user final product. You are hereby notified that a license for such use is required from TPL. Contact: “mmp-licensing@tplgroup.net”

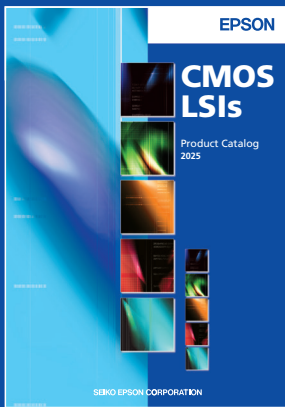

## America

### Epson America, Inc.

Headquarter:  
3131 Katella Ave.  
Los Alamitos, CA 90720, USA  
Phone: +1-800-463-7766

San Jose Office:  
2860 Zanker Road Suite 204  
San Jose, CA 95134, USA  
Phone: +1-800-463-7766

## Europe

### Epson Europe Electronics GmbH

Riesstrasse 15, 80992 Munich, Germany  
Phone: +49-89-14005-0

## Asia

### Epson (China) Co., Ltd.

4th Floor, Tower 1 of China Central Place, 81 Jianguo Road, Chaoyang District, Beijing 100025 China  
Phone: +86-10-8522-1199

### Shanghai Branch

Room 601-603, Building A One East, No.325 East Longhua Road, Shanghai 200023, China  
Phone: +86-21-5330-4888

### Shenzhen Branch

Room 603/604, 6 Floor, Tower 7, One Shenzhen Bay, No.3008 Center Rd, Shenzhen 518054, China  
Phone: +86-755-3299-0588

### Epson Taiwan Technology & Trading Ltd.

15F., No. 100, Songren Rd., Sinyi Dist., Taipei City 110. Taiwan  
Phone: +886-2-8786-6688

### Epson Singapore Pte., Ltd.

438B Alexandra Road, Block B Alexandra TechnoPark, #04-01/04, Singapore 119968  
Phone: +65-6586-5500

### Epson Korea Co., Ltd.

10F Posco Tower Yeoksam, Teheranro 134 Gangnam-gu, Seoul, 06235, Korea  
Phone: +82-2-3420-6695

## Seiko Epson Corp. Sales & Marketing Division

### MD Sales & Marketing Department

421-8, Hino, Hino-shi, Tokyo 191-8501, Japan