


On Board Programming Writer

S5U1C88000W3 Package Specifications

DESCRIPTION


The On Board Programming Writer (S5U1C88000W3) is the PROM writer for the Seiko Epson built-in Flash microcomputers. The device in chip form or plastic package on the target board can be programmed. The plastic package device alone can also be programmed by attaching the Adapter Board provided for each model. Data writing and other operations are controlled by a personal computer via an RS-232C.

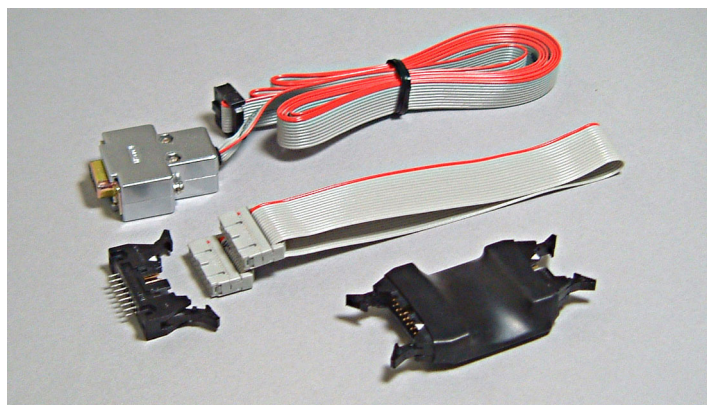

COMPONENTS

The On Board Programming Writer Package contains the following components:

(1) On Board Programming Writer (S5U1C88000W3) main unit	1
(2) RS-232C cable (for IBM-PC/AT)	1
(3) SIO cable	1
(4) Connector for target board (male)	1
(5) On Board Programming Writer (S5U1C88000W3) Package Specifications (this sheet)	1
(6) Notes for using	1
(7) Warranty registration card	1

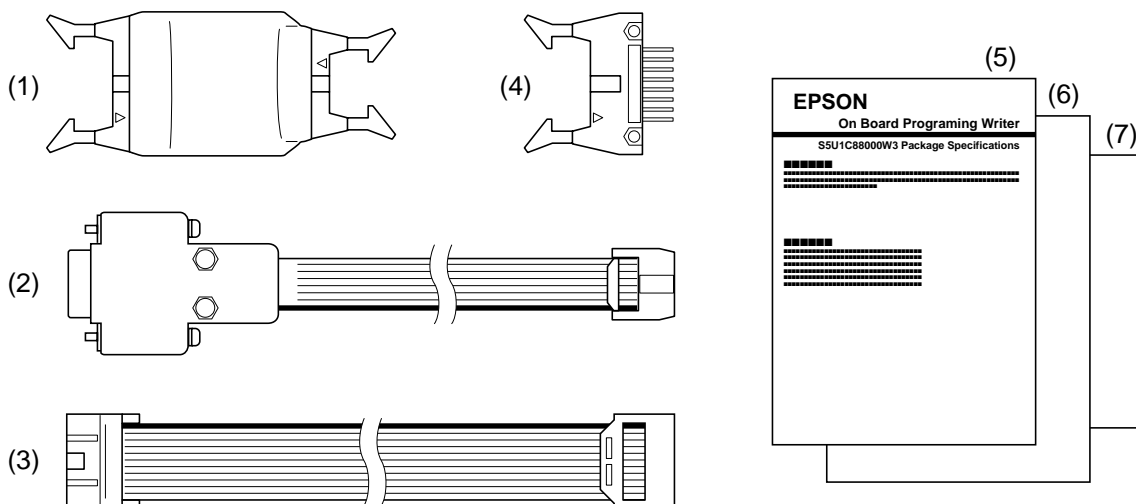

Refer to the "Technical Manual" of the built-in Flash microcomputer for how to use the On Board Programming Writer.

This package does not contains the following tools:

- (A) Adapter Board (S5U1CxxxxxZ1)
- (B) On Board Programming Writer Control Software (S5U1CxxxxxY3)

On Board Programming Writer

■ SPECIFICATIONS OF COMPONENTS

No.	Component name	Item	Specifications	Remarks
1	Main unit	Dimensions	80 mm (L) × 40 mm (W) × 12 mm (H)	Connectors included
		PC connector	HIF3BD-10PA-2.54DS	
		Target connector	HIF3BA-16PA-2.54DS	
		Input voltage	Equivalent to the microcomputer input voltage	Refer to "Electrical Characteristics" in the Technical Manual for each model.
		Power consumption	50 mA, max.	
2	RS-232C cable	Length	2 m	
		PC connector	FDBD-9S	
		Main unit connector	HIF3BA-10D-2.54R	
3	SIO cable	Length	30 cm	
		Main unit connector	7916-B500FL (3M) and 3448-7916 (3M)	
		Target connector	7916-B500FL (3M) and 3448-7916 (3M)	
4	Connector for target board (male)	Connector	3408-6002LCFL (3M)	

■ OPERATING ENVIRONMENT CONDITIONS

No.	Item	Specifications	Remarks
1	Operating temperature	5 to 40°C	
2	Storage temperature	-20 to 60°C	
3	Operating humidity	30 to 80%	No condensation
4	Storage humidity	20 to 90%	

NOTICE:

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.

© Seiko Epson Corporation 2001 All right reserved.

SEIKO EPSON CORPORATION

ELECTRONIC DEVICES MARKETING DIVISION

IC Marketing & Engineering Group

ED International Marketing Department Europe & U.S.A.

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone : 042-587-5812 FAX : 042-587-5564

ED International Marketing Department Asia

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone : 042-587-5814 FAX : 042-587-5110

■ EPSON Electronic Devices Website

<http://www.epson.co.jp/device/>