

CMOS 16-BIT SINGLE CHIP MICROCONTROLLER

S1C17706

Technical Manual


NOTICE

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of Economy, Trade and Industry or other approval from another government agency.


This product uses SuperFlash[®] technology licensed from Silicon Storage Technology, Inc.
All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

Configuration of product number

Devices

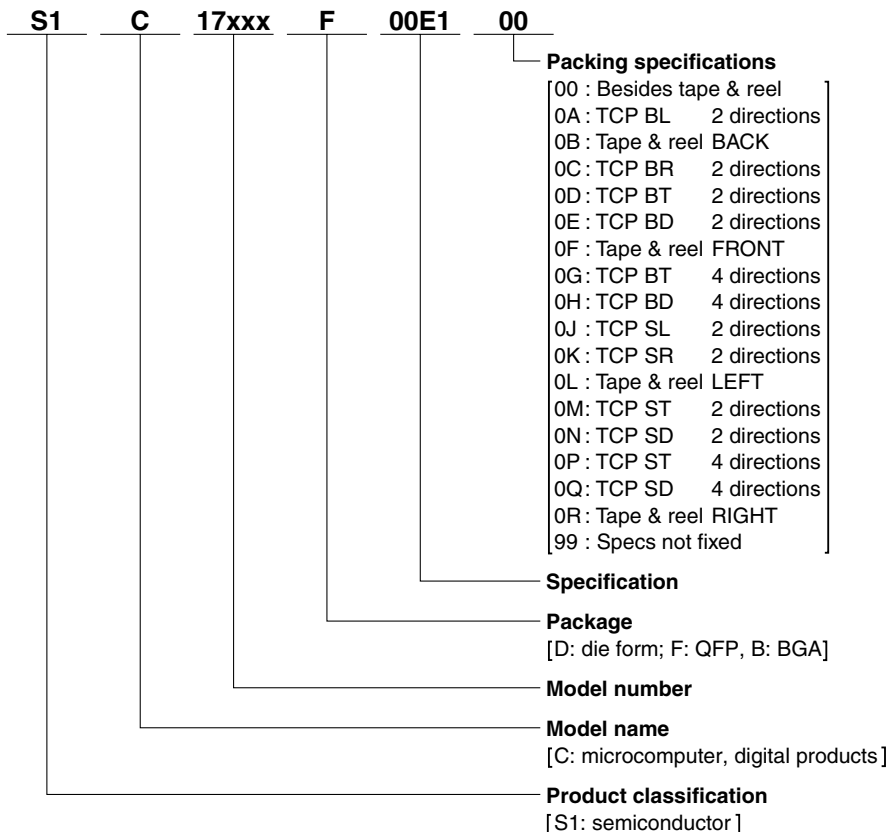

Development tools

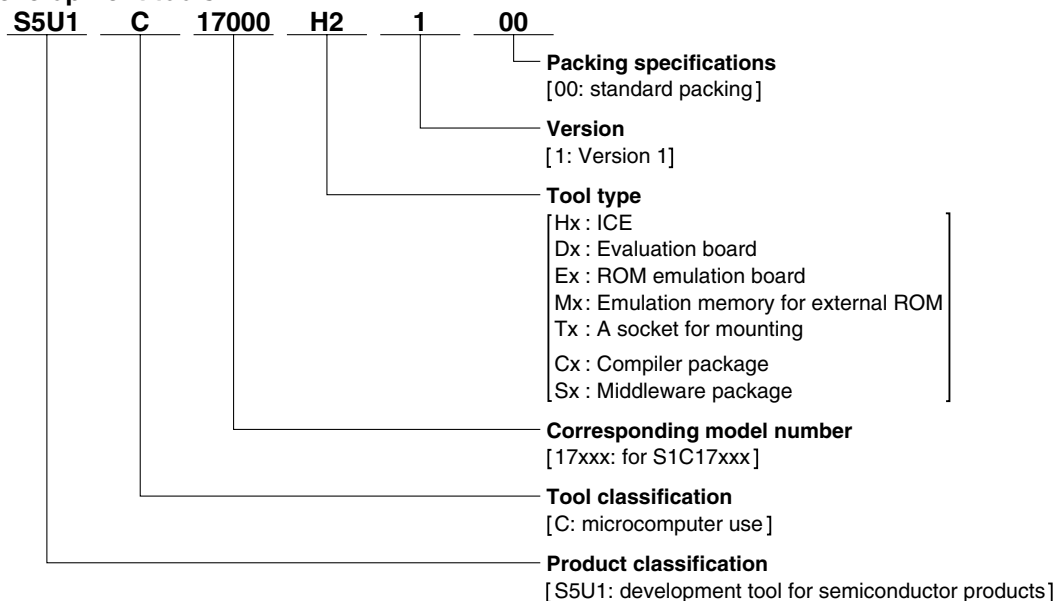

– Contents –

1 Overview	1-1
1.1 Features	1-1
1.2 Block Diagram	1-3
1.3 Pins	1-4
1.3.1 Pin Configuration Diagram (QFP22-256pin)	1-4
1.3.2 Pad Configuration Diagram (Chip)	1-5
1.3.3 Pin Descriptions	1-8
2 CPU	2-1
2.1 Features of the S1C17 Core	2-1
2.2 CPU Registers	2-2
2.3 Instruction Set	2-2
2.4 Reading PSR	2-5
2.5 Processor Information	2-6
3 Memory Map, Bus Control	3-1
3.1 Bus Cycle	3-1
3.1.1 Restrictions on Access Size	3-2
3.1.2 Restrictions on Instruction Execution Cycles	3-2
3.2 Flash Area	3-2
3.2.1 Internal Flash Memory	3-2
3.2.2 Flash Programming	3-2
3.2.3 Protect Bits	3-3
Flash Protect Bits	3-3
3.2.4 Access Control for the Flash Controller	3-4
FLASHC/SRAMC Control Register (MISC_FL)	3-4
3.3 Internal RAM Area	3-5
3.3.1 Internal RAM	3-5
IRAM Size Select Register (MISC_IRAMSZ)	3-5
3.4 Display RAM Area	3-6
3.4.1 Display RAM	3-6
3.4.2 Access Control for the SRAM Controller	3-6
FLASHC/SRAMC Control Register (MISC_FL)	3-6
3.5 Internal Peripheral Area	3-7
3.5.1 Internal Peripheral Area 1 (0x4000–)	3-7
3.5.2 Internal Peripheral Area 2 (0x5000–)	3-8
3.6 S1C17 Core I/O Area	3-8
4 Power Supply	4-1
4.1 Power Supply Voltage (V_{DD})	4-1
4.2 Analog Power Supply Voltage (AV_{DD})	4-1
4.3 Internal Power Supply Circuit	4-1
4.4 Controlling the Power Supply Circuit	4-2
4.5 Heavy Load Protection Function	4-4
4.6 Control Register Details	4-4
V_{D1} Control Register (VD1_CTL)	4-4
V_{D1} Select Register (VD1_SEL)	4-5
LCD Voltage Regulator Control Register (LCD_VREG)	4-5
LCD Power Voltage Booster Control Register (LCD_PWR)	4-6
5 Initial Reset	5-1
5.1 Initial Reset Sources	5-1

CONTENTS

5.1.1	#RESET Pin	5-1
5.1.2	P0 Port Key-Entry Reset	5-1
5.1.3	Resetting by the Watchdog Timer	5-1
5.1.4	Resetting by the Supply Voltage Detector	5-2
5.2	Initial Reset Sequence	5-2
5.3	Initial Settings After an Initial Reset	5-2
6	Interrupt Controller (ITC)	6-1
6.1	ITC Module Overview	6-1
6.2	Vector Table	6-2
	Vector Table Address Low/High Registers (MISC_TTBRL, MISC_TTBRLH)	6-4
6.3	Control of Maskable Interrupts	6-4
6.3.1	Interrupt Control Bits in Peripheral Modules	6-4
6.3.2	ITC Interrupt Request Processing	6-4
6.3.3	Interrupt Processing by the S1C17 Core	6-5
6.4	NMI	6-6
6.5	Software Interrupts	6-6
6.6	HALT and SLEEP Mode Cancellation	6-6
6.7	Control Register Details	6-6
	Interrupt Level Setup Register 0 (ITC_LV0)	6-7
	Interrupt Level Setup Register 1 (ITC_LV1)	6-7
	Interrupt Level Setup Register 2 (ITC_LV2)	6-8
	Interrupt Level Setup Register 3 (ITC_LV3)	6-8
	Interrupt Level Setup Register 4 (ITC_LV4)	6-8
	Interrupt Level Setup Register 5 (ITC_LV5)	6-9
	Interrupt Level Setup Register 6 (ITC_LV6)	6-9
	Interrupt Level Setup Register 7 (ITC_LV7)	6-9
	Interrupt Level Setup Register 8 (ITC_LV8)	6-10
	Interrupt Level Setup Register 9 (ITC_LV9)	6-10
	Interrupt Level Setup Register 10 (ITC_LV10)	6-10
	Interrupt Level Setup Register 11 (ITC_LV11)	6-11
7	Clock Generator (CLG)	7-1
7.1	CLG Module Overview	7-1
7.2	CLG Input/Output Pins	7-2
7.3	Oscillators	7-2
7.3.1	IOOSC Oscillator	7-2
7.3.2	OSC3 Oscillator	7-3
7.3.3	OSC1 Oscillator	7-4
7.4	System Clock Switching	7-5
7.5	CPU Core Clock (CCLK) Control	7-7
7.6	Peripheral Module Clock (PCLK) Control	7-7
7.7	Clock External Output (FOUTA, FOUTB)	7-8
7.8	Control Register Details	7-9
	Clock Source Select Register (CLG_SRC)	7-10
	Oscillation Control Register (CLG_CTL)	7-11
	Sleep Control Register (CLG_SLPCTL)	7-12
	FOUTA Control Register (CLG_FOUTA)	7-13
	FOUTB Control Register (CLG_FOUTB)	7-14
	PCLK Control Register (CLG_PCLK)	7-15
	CCLK Control Register (CLG_CCLK)	7-16
8	I/O Ports (P)	8-1
8.1	P Module Overview	8-1
8.2	Input/Output Pin Function Selection (Port MUX)	8-2

8.3	Data Input/Output.....	8-2
8.4	Pull-up Control	8-3
8.5	Input Interface Level.....	8-4
8.6	P0–P3 Port Chattering Filter Function	8-4
8.7	Port Input Interrupt	8-4
8.8	P0 Port Key-Entry Reset	8-5
8.9	Control Register Details	8-6
	P x Port Input Data Registers (P x _IN)	8-7
	P x Port Output Data Registers (P x _OUT).....	8-7
	P x Port Output Enable Registers (P x _OEN).....	8-7
	P x Port Pull-up Control Registers (P x _PU).....	8-8
	P x Port Schmitt Trigger Control Registers (P x _SM).....	8-8
	P x Port Interrupt Mask Registers (P x _IMSK).....	8-8
	P x Port Interrupt Edge Select Registers (P x _EDGE).....	8-9
	P x Port Interrupt Flag Registers (P x _IFLG)	8-9
	P x Port Chattering Filter Control Registers (P x _CHAT).....	8-10
	P0 Port Key-Entry Reset Configuration Register (P0_KRST)	8-11
	P x Port Input Enable Registers (P x _IEN)	8-11
	P0[3:0] Port Function Select Register (P00_03PMUX)	8-12
	P0[7:4] Port Function Select Register (P04_07PMUX)	8-13
	P1[3:0] Port Function Select Register (P10_13PMUX)	8-14
	P1[7:4] Port Function Select Register (P14_17PMUX)	8-15
	P2[3:0] Port Function Select Register (P20_23PMUX)	8-16
	P2[7:4] Port Function Select Register (P24_27PMUX)	8-17
	P3[3:0] Port Function Select Register (P30_33PMUX)	8-18
	P3[7:4] Port Function Select Register (P34_37PMUX)	8-19
	P4[2:0] Port Function Select Register (P40_42PMUX)	8-20
9	16-bit Timers (T16).....	9-1
9.1	T16 Module Overview	9-1
9.2	Count Clock.....	9-2
9.3	Count Mode.....	9-2
9.4	Reload Data Register and Underflow Cycle.....	9-2
9.5	Timer Reset.....	9-3
9.6	Timer RUN/STOP Control	9-3
9.7	T16 Output Signals.....	9-4
9.8	T16 Interrupts.....	9-4
9.9	Control Register Details	9-5
	T16 Ch. x Count Clock Select Registers (T16_CLK x)	9-6
	T16 Ch. x Reload Data Registers (T16_TR x)	9-6
	T16 Ch. x Counter Data Registers (T16_TC x).....	9-7
	T16 Ch. x Control Registers (T16_CTL x).....	9-7
	T16 Ch. x Interrupt Control Registers (T16_INT x)	9-8
10	16-bit PWM timers (T16A2)	10-1
10.1	T16A2 Module Overview	10-1
10.2	T16A2 Input/Output Pins.....	10-3
10.3	Count Clock.....	10-3
10.4	T16A2 Operating Modes	10-5
	10.4.1 Comparator Mode and Capture Mode	10-5
	10.4.2 Repeat Mode and One-Shot Mode	10-6
	10.4.3 Normal Channel Mode and Multi-Comparator/Capture Mode	10-7
	10.4.4 Normal Clock Mode and Half Clock Mode	10-8
10.5	Counter Control	10-9
	10.5.1 Counter Reset.....	10-9

CONTENTS

10.5.2 Counter RUN/STOP Control	10-9
10.5.3 Reading Counter Values	10-9
10.5.4 Timing Charts.....	10-9
10.6 Timer Output Control.....	10-10
10.7 T16A2 Interrupts.....	10-12
10.8 Control Register Details	10-14
T16A Clock Control Register Ch.x (T16A_CLKx)	10-15
T16A Counter Ch.x Control Registers (T16A_CTLx).....	10-16
T16A Counter Ch.x Data Registers (T16A_TCx).....	10-18
T16A Comparator/Capture Ch.x Control Registers (T16A_CCCTLx).....	10-18
T16A Comparator/Capture Ch.x A Data Registers (T16A_CCAx).....	10-20
T16A Comparator/Capture Ch.x B Data Registers (T16A_CCBx).....	10-20
T16A Comparator/Capture Ch.x Interrupt Enable Registers (T16A_IENx).....	10-21
T16A Comparator/Capture Ch.x Interrupt Flag Registers (T16A_IFLGx).....	10-22
11 Clock Timer (CT)	11-1
11.1 CT Module Overview.....	11-1
11.2 Operation Clock.....	11-1
11.3 Timer Reset.....	11-1
11.4 Timer RUN/STOP Control	11-1
11.5 CT Interrupts	11-2
11.6 Control Register Details	11-3
Clock Timer Control Register (CT_CTL).....	11-3
Clock Timer Counter Register (CT_CNT).....	11-4
Clock Timer Interrupt Mask Register (CT_IMSK).....	11-4
Clock Timer Interrupt Flag Register (CT_IFLG).....	11-5
12 Stopwatch Timer (SWT).....	12-1
12.1 SWT Module Overview	12-1
12.2 Operation Clock.....	12-1
12.3 BCD Counters	12-1
12.4 Timer Reset.....	12-2
12.5 Timer RUN/STOP Control	12-2
12.6 SWT Interrupts	12-3
12.7 Control Register Details	12-4
Stopwatch Timer Control Register (SWT_CTL).....	12-4
Stopwatch Timer BCD Counter Register (SWT_BCNT).....	12-5
Stopwatch Timer Interrupt Mask Register (SWT_IMSK).....	12-5
Stopwatch Timer Interrupt Flag Register (SWT_IFLG).....	12-6
13 Real-Time Clock (RTC2).....	13-1
13.1 Real-Time Clock Module Overview	13-1
13.2 Operation Clock.....	13-1
13.3 Real-Time Clock Control	13-2
13.3.1 Real-Time Clock Counter Settings.....	13-2
13.3.2 Real-Time Clock RUN	13-2
13.4 Real-Time Clock Interrupts	13-2
13.5 Details of Control Registers	13-3
RTC Interrupt Flag Register (RTC_IFLG).....	13-4
RTC Interrupt Mask Register (RTC_IMSK)	13-5
RTC Control 0 Register (RTC_CNTL0)	13-6
RTC Control 1 Register (RTC_CNTL1)	13-6
RTC Second Register (RTC_SEC).....	13-7
RTC Minute Register (RTC_MIN).....	13-7
RTC Hour Register (RTC_HOUR).....	13-8

RTC Day Register (RTC_DAY).....	13-8
RTC Month Register (RTC_MONTH).....	13-9
RTC Year Register (RTC_YEAR).....	13-9
RTC Week Register (RTC_WEEK).....	13-9
RTC 1Hz Register (RTC_1HZ).....	13-10
14 Watchdog Timer (WDT).....	14-1
14.1 WDT Module Overview	14-1
14.2 WDT Clock	14-1
14.3 WDT Control.....	14-2
14.3.1 NMI/Reset Mode Selection	14-2
14.3.2 WDT Run/Stop Control	14-2
14.3.3 WDT Reset	14-2
14.3.4 Operations in HALT and SLEEP Modes	14-2
14.4 Control Register Details	14-3
Watchdog Timer Control Register (WDT_CTL).....	14-3
Watchdog Timer Status Register (WDT_ST).....	14-3
Watchdog Timer Clock Select Register (WDT_CLK).....	14-4
15 UART.....	15-1
15.1 UART Module Overview	15-1
15.2 UART Input/Output Pins.....	15-2
15.3 Baud Rate Generator	15-2
15.4 Transfer Data Settings	15-4
15.5 Data Transfer Control	15-5
15.6 Receive Errors.....	15-8
15.7 UART Interrupts	15-8
15.8 IrDA Interface	15-9
15.9 Control Register Details	15-10
UART Ch.x Status Register (UART_STx)	15-11
UART Ch.x Transmit Data Register (UART_TXDx).....	15-12
UART Ch.x Receive Data Register (UART_RXDx).....	15-13
UART Ch.x Mode Register (UART_MODx).....	15-13
UART Ch.x Control Register (UART_CTLx).....	15-14
UART Ch.x Expansion Register (UART_EXPx).....	15-15
UART Ch.x Baud Rate Register (UART_BRx).....	15-15
UART Ch.x Fine Mode Register (UART_FMDx).....	15-16
UART Ch.x Clock Control Register (UART_CLKx).....	15-17
16 SPI.....	16-1
16.1 SPI Module Overview.....	16-1
16.2 SPI Input/Output Pins.....	16-1
16.3 SPI Clock	16-2
16.4 Data Transfer Condition Settings.....	16-2
16.5 Data Transfer Control	16-3
16.6 SPI Interrupts	16-5
16.7 Control Register Details	16-6
SPI Ch.x Status Registers (SPI_STx).....	16-6
SPI Ch.x Transmit Data Registers (SPI_TXDx).....	16-7
SPI Ch.x Receive Data Registers (SPI_RXDx).....	16-7
SPI Ch.x Control Registers (SPI_CTLx)	16-8
17 I²C Master (I2CM).....	17-1
17.1 I2CM Module Overview	17-1
17.2 I2CM Input/Output Pins.....	17-1

CONTENTS

17.3 Synchronization Clock.....	17-2
17.4 Settings Before Data Transfer	17-2
17.5 Data Transfer Control	17-2
17.6 I2CM Interrupts	17-6
17.7 Control Register Details	17-7
I ² C Master Enable Register (I2CM_EN).....	17-7
I ² C Master Control Register (I2CM_CTL).....	17-7
I ² C Master Data Register (I2CM_DAT).....	17-9
I ² C Master Interrupt Control Register (I2CM_ICTL)	17-10
18 I²C Slave (I2CS).....	18-1
18.1 I2CS Module Overview	18-1
18.2 I2CS Input/Output Pins	18-1
18.3 Operation Clock.....	18-2
18.4 Initializing I2CS	18-2
18.4.1 Reset	18-2
18.4.2 Setting Slave Address.....	18-2
18.4.3 Optional Functions	18-2
18.5 Data Transfer Control	18-3
18.6 I2CS Interrupts	18-8
18.7 Control Register Details	18-9
I ² C Slave Transmit Data Register (I2CS_TRNS)	18-9
I ² C Slave Receive Data Register (I2CS_RECV)	18-10
I ² C Slave Address Setup Register (I2CS_SADRS).....	18-10
I ² C Slave Control Register (I2CS_CTL)	18-10
I ² C Slave Status Register (I2CS_STAT)	18-13
I ² C Slave Access Status Register (I2CS_ASTAT)	18-15
I ² C Slave Interrupt Control Register (I2CS_ICTL)	18-16
19 IR Remote Controller (REMC).....	19-1
19.1 REMC Module Overview.....	19-1
19.2 REMC Input/Output Pins.....	19-1
19.3 Carrier Generation	19-1
19.4 Data Length Counter Clock Settings.....	19-2
19.5 Data Transfer Control	19-3
19.6 REMC Interrupts	19-5
19.7 Control Register Details	19-6
REMC Configuration Register (REMC_CFG).....	19-6
REMC Carrier Length Setup Register (REMC_CAR).....	19-8
REMC Length Counter Register (REMC_LCNT)	19-9
REMC Interrupt Control Register (REMC_INT).....	19-9
20 Sound Generator (SND)	20-1
20.1 SND Module Overview	20-1
20.2 SND Output Pins.....	20-1
20.3 SND Clock (SNDCLK).....	20-1
20.4 Buzzer Frequency and Volume Settings.....	20-2
20.4.1 Buzzer Frequency	20-2
20.4.2 Volume level	20-3
20.5 Buzzer Mode and Output Control.....	20-3
20.5.1 Buzzer Mode Selection.....	20-3
20.5.2 Output Control in Normal Mode	20-4
20.5.3 Output Control in One-shot Mode	20-4
20.5.4 Output Control in Envelope Mode.....	20-5

20.6 Control Register Details	20-5
SND Clock Control Register (SND_CLK)	20-6
SND Control Register (SND_CTL)	20-7
Buzzer Frequency Control Register (SND_BZFQ)	20-8
Buzzer Duty Ratio Control Register (SND_BZDT)	20-8
21 LCD Driver (LCD32A)	21-1
21.1 LCD Module Overview	21-1
21.2 LCD SEG/COM Pins	21-2
21.3 LCD Power Supply	21-4
21.4 LCD Clock	21-4
21.4.1 LCD Operating Clock (LCLK)	21-4
21.4.2 Frame Signal	21-5
21.5 LCD Drive Control	21-6
21.5.1 Drive Duty Switching	21-6
21.5.2 Drive Waveform	21-7
21.5.3 64-COM Emulation Mode	21-10
21.5.4 COM Outputs Partial Drive	21-11
21.5.5 SEG Outputs n-line AC Reverse Drive	21-11
21.6 Display RAM	21-12
21.7 Display Control	21-18
21.7.1 Display On/Off	21-18
21.7.2 LCD Contrast Adjustment	21-18
21.7.3 Inverted Display	21-18
21.7.4 Gray-Scale Display	21-18
21.8 LCD Interrupt	21-19
21.9 Control Register Details	21-19
LCD Clock Select Register (LCD_CLK)	21-20
LCD Display Control Register (LCD_DCTL)	21-21
LCD Contrast Adjustment Register (LCD_CADJ)	21-22
LCD Clock Control Register (LCD_CCTL)	21-23
LCD Voltage Regulator Control Register (LCD_VREG)	21-24
LCD Power Voltage Booster Control Register (LCD_PWR)	21-24
LCD Interrupt Mask Register (LCD_IMSK)	21-24
LCD Interrupt Flag Register (LCD_IFLG)	21-24
COM Terminal Control \times Registers (LCD_COMC \times)	21-25
SEG Terminal Control Register (LCD_SEGC)	21-25
22 A/D Converter (ADC10)	22-1
22.1 ADC10 Module Overview	22-1
22.2 ADC10 Input Pins	22-2
22.3 A/D Converter Settings	22-2
22.3.1 A/D Conversion Clock Setting	22-2
22.3.2 Selecting A/D Conversion Start and End Channels	22-3
22.3.3 A/D Conversion Mode Setting	22-3
22.3.4 Trigger Selection	22-4
22.3.5 Sampling Time Setting	22-4
22.3.6 Setting Conversion Result Storing Mode	22-5
22.4 A/D Conversion Control and Operations	22-5
22.4.1 Activating A/D Converter	22-5
22.4.2 Starting A/D conversion	22-5
22.4.3 Reading A/D Conversion Results	22-6
22.4.4 Terminating A/D Conversion	22-6
22.4.5 Timing Charts	22-6

CONTENTS

22.5	A/D Converter Interrupts	22-8
22.6	Control Register Details	22-8
	A/D Conversion Result Register (ADC10_ADD)	22-9
	A/D Trigger/Channel Select Register (ADC10_TRG)	22-9
	A/D Control/Status Register (ADC10_CTL)	22-11
	A/D Clock Control Register (ADC10_CLK)	22-13
23	R/F Converter (RFC)	23-1
23.1	RFC Module Overview	23-1
23.2	RFC Input/Output Pins	23-2
23.3	Operation Clock.....	23-2
23.4	Operating Modes.....	23-3
	23.4.1 Oscillation Mode	23-3
	23.4.2 External Clock Input Mode (Event Counter Mode)	23-4
	23.4.3 Functions for Measuring CR Oscillation Clock Frequency.....	23-4
23.5	RFC Counters	23-5
23.6	Conversion Operations.....	23-5
	23.6.1 Initial Settings	23-6
	23.6.2 Reference Oscillation Control	23-6
	23.6.3 Sensor Oscillation Control	23-7
	23.6.4 Forced Termination	23-8
	23.6.5 Conversion Error.....	23-8
23.7	RFC Interrupts	23-8
23.8	Control Register Details	23-9
	RFC Clock Control Registers (RFC_CLK).....	23-9
	RFC Control Register (RFC_CTL).....	23-10
	RFC Oscillation Trigger Register (RFC_TRG).....	23-11
	RFC Measurement Counter Low and High Registers (RFC_MCL, RFC_MCH)	23-12
	RFC Time Base Counter Low and High Registers (RFC_TCL, RFC_TCH)	23-12
	RFC Interrupt Mask Register (RFC_IMSK)	23-12
	RFC Interrupt Flag Register (RFC_IFLG)	23-13
24	Supply Voltage Detector (SVD).....	24-1
24.1	SVD Module Overview	24-1
24.2	Operating Clock.....	24-1
24.3	Comparison Voltage Setting.....	24-2
24.4	SVD Control	24-2
24.5	Intermittent Operation	24-3
24.6	SVD Interrupt and Reset.....	24-3
24.7	Control Register Details	24-4
	SVD Clock Control Register (SVD_CLK)	24-4
	SVD Enable Register (SVD_EN).....	24-5
	SVD Comparison Voltage Register (SVD_CMP).....	24-6
	SVD Detection Result Register (SVD_RSLT).....	24-6
	SVD Interrupt Mask Register (SVD_IMSK)	24-7
	SVD Interrupt Flag Register (SVD_IFLG)	24-7
25	On-chip Debugger (DBG).....	25-1
25.1	Resource Requirements and Debugging Tools	25-1
25.2	Debug Break Operation Status	25-1
25.3	Additional Debugging Function	25-2
25.4	Control Register Details	25-2
	Debug Mode Control Register 1 (MISC_DMODE1)	25-2
	Debug Mode Control Register 2 (MISC_DMODE2)	25-3
	IRAM Size Select Register (MISC_IRAMSZ)	25-3

Debug RAM Base Register (DBRAM)	25-4	
Debug Control Register (DCR)	25-4	
Instruction Break Address Register 2 (IBAR2)	25-5	
Instruction Break Address Register 3 (IBAR3)	25-5	
Instruction Break Address Register 4 (IBAR4)	25-6	
26 Multiplier/Divider (COPRO)	26-1	
26.1 Overview	26-1	
26.2 Operation Mode and Output Mode	26-1	
26.3 Multiplication	26-2	
26.4 Division	26-3	
26.5 MAC	26-4	
26.6 Reading Results	26-6	
27 Electrical Characteristics	27-1	
27.1 Absolute Maximum Ratings	27-1	
27.2 Recommended Operating Conditions	27-1	
27.3 Current Consumption	27-2	
27.4 Oscillation Characteristics	27-3	
27.5 External Clock Input Characteristics	27-4	
27.6 Input/Output Pin Characteristics	27-5	
27.7 SPI Characteristics	27-6	
27.8 I ² C Characteristics	27-6	
27.9 LCD Driver Characteristics	27-7	
27.10 A/D Converter Characteristics	27-9	
27.11 R/F Converter Characteristics	27-10	
27.12 SVD Circuit Characteristics	27-12	
27.13 Flash Memory Characteristics	27-13	
28 Basic External Connection Diagram	28-1	
29 Package	29-1	
Appendix A List of I/O Registers	AP-A-1	
0x4100–0x4107, 0x506c	UART (with IrDA) Ch.0	AP-A-6
0x4120–0x4127, 0x506d	UART (with IrDA) Ch.1	AP-A-7
0x4200–0x4208	16-bit Timer Ch.0	AP-A-8
0x4220–0x4228	16-bit Timer Ch.1	AP-A-8
0x4240–0x4248	16-bit Timer Ch.2	AP-A-9
0x4260–0x4268	16-bit Timer Ch.3	AP-A-9
0x4280–0x4288	16-bit Timer Ch.4	AP-A-10
0x4306–0x431c	Interrupt Controller	AP-A-10
0x4320–0x4326	SPI Ch.0	AP-A-11
0x4340–0x4346	I ² C Master	AP-A-11
0x4360–0x436c	I ² C Slave	AP-A-12
0x4380–0x4386	SPI Ch.1	AP-A-13
0x43a0–0x43a6	SPI Ch.2	AP-A-13
0x5000–0x5003	Clock Timer	AP-A-14
0x5020–0x5023	Stopwatch Timer	AP-A-14
0x5040–0x5041	Watchdog Timer	AP-A-14
0x5060–0x5081	Clock Generator	AP-A-15
0x5063, 0x50a0–0x50a6	LCD Driver	AP-A-16
0x5066, 0x5100–0x5104	SVD Circuit	AP-A-17
0x5120–0x5122	Power Generator	AP-A-17
0x5140–0x514b	Real-time Clock	AP-A-18

CONTENTS

0x506f, 0x5180–0x5182	Sound Generator	AP-A-19
0x5200–0x52a8	P Port & Port MUX.....	AP-A-19
0x4020, 0x5320–0x532c	MISC Registers	AP-A-26
0x5340–0x5346	IR Remote Controller.....	AP-A-27
0x5380–0x5386	A/D Converter.....	AP-A-28
0x5067, 0x53a0–0x53ae	R/F Converter	AP-A-28
0x5068, 0x5400–0x540c	16-bit PWM Timer Ch.0	AP-A-30
0x5069, 0x5420–0x542c	16-bit PWM Timer Ch.1	AP-A-31
0x506a, 0x5440–0x544c	16-bit PWM Timer Ch.2	AP-A-33
0x506b, 0x5460–0x546c	16-bit PWM Timer Ch.3	AP-A-34
0xffff84–0xffffd0	S1C17 Core I/O	AP-A-35
Appendix B Power Saving	AP-B-1	
B.1 Clock Control Power Saving.....	AP-B-1	
B.2 Reducing Power Consumption via Power Supply Control	AP-B-3	
Appendix C Mounting Precautions.....	AP-C-1	
Appendix D Initialization Routine	AP-D-1	
Revision History		

1 Overview

The S1C17706 is a 16-bit MCU featuring high-speed low-power operations, compact dimensions, wide address space, and on-chip ICE. Based on an S1C17 CPU core, this product consists of 1024K bytes of Flash memory, 12K bytes of RAM, serial interface modules supporting sensors such as UART to support high-bit rate and IrDA1.0, SPI, and I²C, various timers, 34 general input/output ports, maximum 160 segment × 32 common LCD driver and a power supply voltage booster circuit, A/D converter, R/F converter, supply voltage detector, and 32 kHz and maximum 8.2 MHz oscillator circuits. The embedded Flash memory can include font data, such as 11 × 12-dot Japanese characters (JIS level-1, JIS level-2 and other kanji fonts), Hangul characters and user defined characters.

It allows 8.2 MHz high-speed operation at a minimum of 1.8 V operating voltage, and executes a basic instruction in one clock cycle with 16-bit RISC processing. The S1C17706 also includes a coprocessor supporting multiplication, division, and MAC (multiply and accumulation) operations.

The on-chip ICE function allows onboard Flash programming/erasing, program debugging, and evaluations using the ICDmini (S5U1C17001H) that can be connected with three signal wires.

The S1C17706 is ideal for applications, such as remote controllers, health care products, and sports watches, that must be driven with battery power and require sensor interfaces and a high-definition LCD display.

1.1 Features

The main features of the S1C17706 are listed below.

CPU	<ul style="list-style-type: none"> • Seiko Epson original 16-bit RISC CPU core S1C17 • Multiplier/Divider (COPRO) <ul style="list-style-type: none"> - 16-bit × 16-bit multiplier - 16-bit × 16-bit + 32-bit multiply and accumulation unit - 16-bit ÷ 16-bit divider
On-chip Flash memory	<ul style="list-style-type: none"> • 1M bytes (for both instructions and data) • 1,000 erase/program cycles (min.) • Read/program protection function • Allows on-board programming using a debugging tool such as ICDmini (S5U1C17001H) and self-programming by software control. • Allows storing 11 × 12-dot font data.
On-chip RAM	<ul style="list-style-type: none"> • 12K bytes
On-chip display RAM	<ul style="list-style-type: none"> • Display data: 960 bytes / Gray-scale data: 960 bytes
Clock generator	<ul style="list-style-type: none"> • Three types of built-in oscillators (system clock sources) <ul style="list-style-type: none"> - IOSC oscillator circuit 2.7 MHz (typ.) - OSC3 oscillator circuit 8.2 MHz (max.) crystal or ceramic oscillator circuit Supports an external clock input - OSC1 oscillator circuit 32.768 kHz (typ.) crystal oscillator circuit • Core clock frequency control • Peripheral module clock supply control • IOSC control for quick-restart processing from SLEEP mode
I/O ports	<ul style="list-style-type: none"> • Max. 34 general-purpose I/O ports (Pins are shared with the peripheral I/O.)
Serial interfaces	<ul style="list-style-type: none"> • SPI 3 channels • I²C master (I2CM) 1 channel • I²C slave (I2CS) 1 channel • UART (115200 bps, IrDA 1.0) 2 channels • IR remote controller (REMC) 1 channel

1 OVERVIEW

Timers	<ul style="list-style-type: none">• 16-bit timer (T16) 5 channels• 16-bit PWM timer (T16A2) 4 channels• Clock timer (CT) 1 channel• Stopwatch timer (SWT) 1 channel• Watchdog timer (WDT) 1 channel
Real-time clock	<ul style="list-style-type: none">• Year(with bissextile correction) / month / week / day / hour / minute / second counter, 30sec time correction, 1ch
Sound generator	<ul style="list-style-type: none">• Tones 8 level, Sound volumes 8 level, digital envelop, 1ch
LCD driver	<ul style="list-style-type: none">• 160 SEG × 32 COM (1/5 bias)• 64 COM emulation display mode• Built-in voltage booster• 4-level gray-scale• SEG outputs n-line AC reverse drive• COM outputs partial drive
A/D converter	<ul style="list-style-type: none">• Successive approximation type• Eight analog input channels (max.)• 10-bit resolution
R/F converter	<ul style="list-style-type: none">• Two channels, CR oscillation type• 24-bit counter• Supports DC-bias resistive/capacitive sensors and AC-bias resistive sensors.• Supports external input for counting pulses.
Supply voltage detector (SVD)	<ul style="list-style-type: none">• 15 programmable detection levels (1.8 V to 3.2 V)• Intermittent operation mode• Supply voltage detection RESET function
Interrupts	<ul style="list-style-type: none">• Reset• NMI• 27 programmable interrupts (eight levels)
Power supply voltage	<ul style="list-style-type: none">• 1.8 V to 3.6 V (for normal operation)• 2.5 V to 3.6 V (for Flash erasing/programming)• Built-in voltage regulator (two operating voltages switchable)
Operating temperature	<ul style="list-style-type: none">• -25°C to 70°C
Current consumption	<ul style="list-style-type: none">• SLEEP state: 1.2 µA typ. (OSC1: Off, IOSC: Off, OSC3: Off)• HALT state: 2.7 µA typ. (OSC1: 32 kHz, IOSC: Off, OSC3: Off, LCD: Off) 9.7 µA typ. (OSC1: 32 kHz, IOSC: Off, OSC3: Off, LCD On all on)• Run state: 18 µA typ. (OSC1: 32 kHz, IOSC: Off, OSC3: Off, LCD Off) 557 µA typ. (OSC1: Off, IOSC: Off, OSC3: 1 MHz ceramic, LCD On all on)
Shipping form	<ul style="list-style-type: none">• QFP22-256pin package (28 mm × 28 mm, lead pitch: 0.4 mm)• Die form (pad pitch: 80 µm)

1.2 Block Diagram


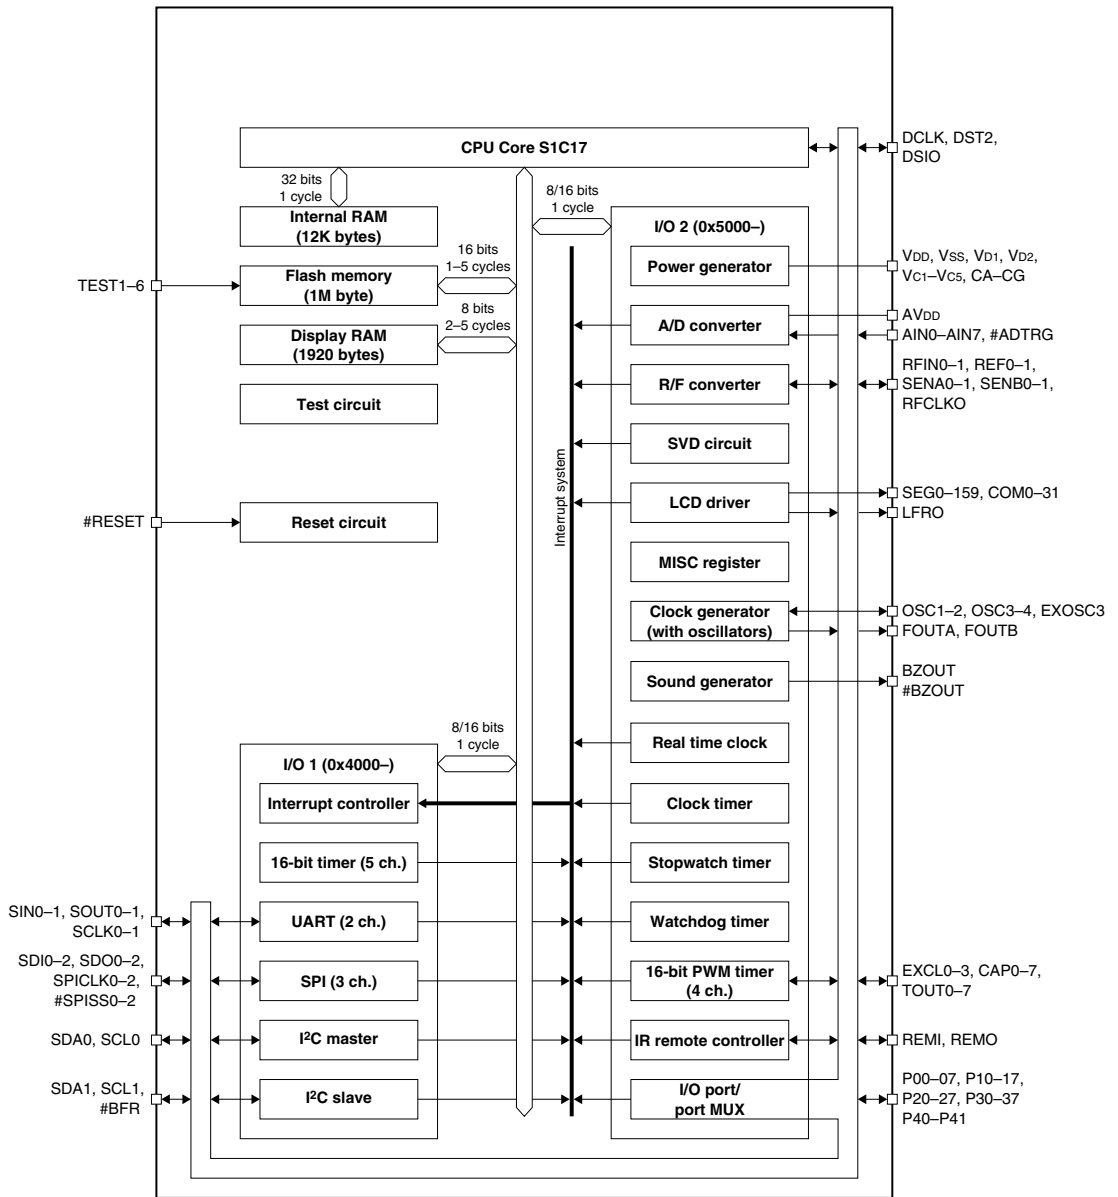


Figure 1.2.1 Block Diagram

1.3.2 Pad Configuration Diagram (Chip)

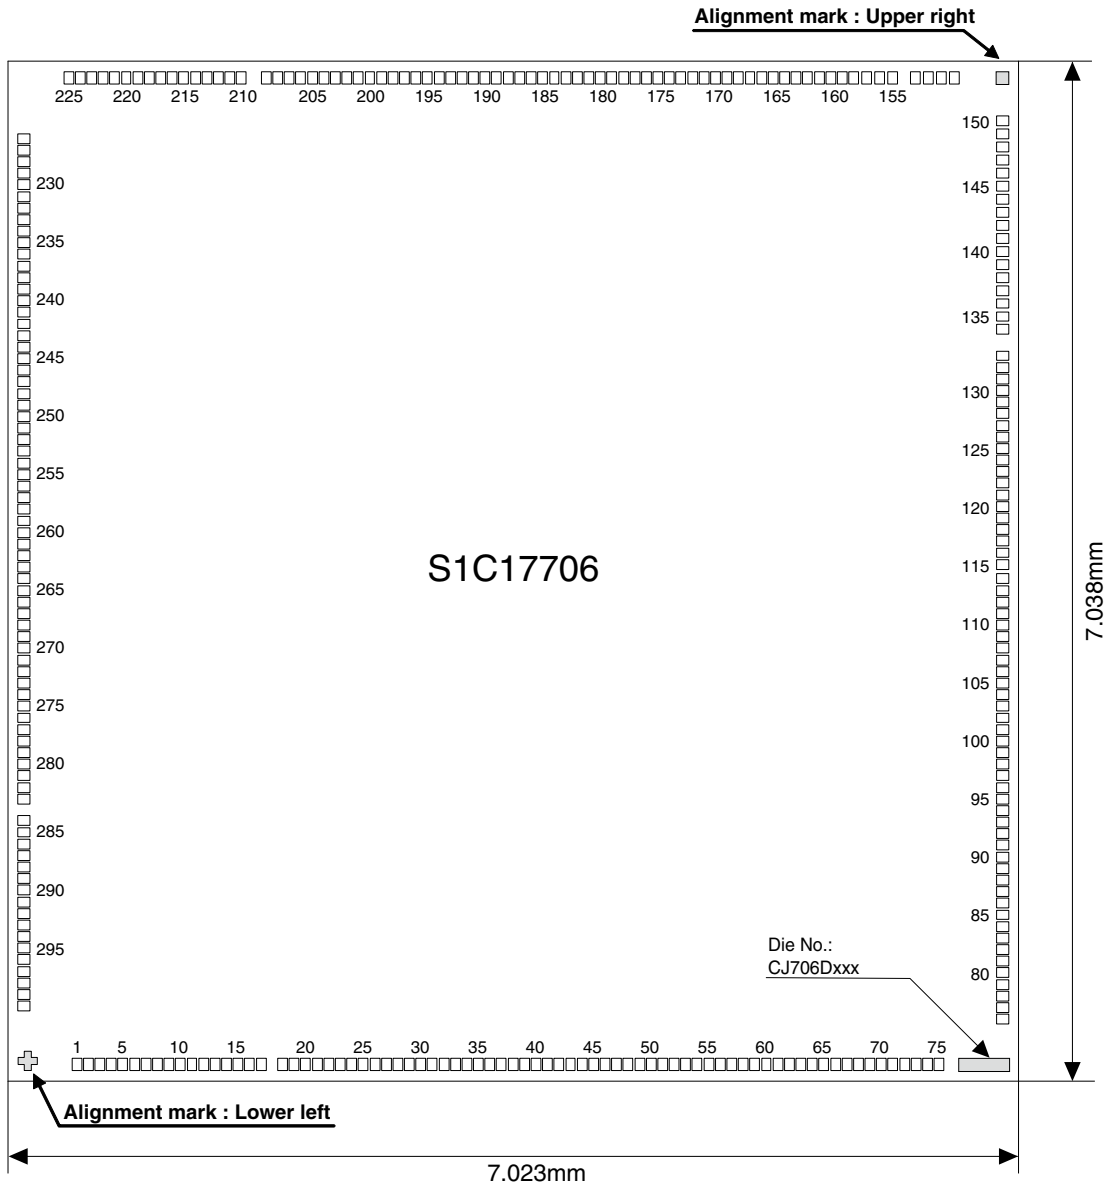

Pad opening	No. 1 to 75, 151 to 225: 67.4 × 85 μm
(at Die form)	No. 76 to 150, 226 to 300: 85 × 67.4 μm
Chip thickness	400 μm
Alignment mark	Lower left (X:-3361μm, Y:-3402μm), Upper right(X:3361μm, Y:3402μm)

Figure 1.3.2.1 Pad Configuration Diagram (chip)

1 OVERVIEW

Table 1.3.2.1 Pad Coordinates

No.	Pad name	X (μm)	Y (μm)	No.	Pad name	X (μm)	Y (μm)
1	SEG64/COM16	-3031.9	-3405.5	58	SEG112/SEG96	1598.1	-3405.5
2	SEG65/COM17	-2951.9	-3405.5	59	N.C.	1678.1	-3405.5
3	SEG66/COM18	-2871.9	-3405.5	60	SEG113/SEG97	1758.1	-3405.5
4	SEG67/COM19	-2791.9	-3405.5	61	SEG114/SEG98	1838.1	-3405.5
5	SEG68/COM20	-2711.9	-3405.5	62	SEG115/SEG99	1918.1	-3405.5
6	SEG69/COM21	-2631.9	-3405.5	63	SEG116/SEG100	1998.1	-3405.5
7	SEG70/COM22	-2551.9	-3405.5	64	SEG117/SEG101	2078.1	-3405.5
8	SEG71/COM23	-2471.9	-3405.5	65	N.C.	2158.1	-3405.5
9	SEG72/COM24	-2391.9	-3405.5	66	SEG118/SEG102	2238.1	-3405.5
10	SEG73/COM25	-2311.9	-3405.5	67	SEG119/SEG103	2318.1	-3405.5
11	N.C.	-2231.9	-3405.5	68	SEG120/SEG104	2398.1	-3405.5
12	SEG74/COM26	-2151.9	-3405.5	69	SEG121/SEG105	2478.1	-3405.5
13	SEG75/COM27	-2071.9	-3405.5	70	SEG122/SEG106	2558.1	-3405.5
14	SEG76/COM28	-1991.9	-3405.5	71	SEG123/SEG107	2638.1	-3405.5
15	SEG77/COM29	-1911.9	-3405.5	72	SEG124/SEG108	2718.1	-3405.5
16	SEG78/COM30	-1831.9	-3405.5	73	SEG125/SEG109	2798.1	-3405.5
17	SEG79/COM31	-1751.9	-3405.5	74	SEG126/SEG110	2878.1	-3405.5
18	SEG80/SEG64	-1601.9	-3405.5	75	SEG127/SEG111	2958.1	-3405.5
19	SEG81/SEG65	-1521.9	-3405.5	76	SEG128/SEG112	3398.0	-3093.0
20	SEG82/SEG66	-1441.9	-3405.5	77	SEG129/SEG113	3398.0	-3013.0
21	SEG83/SEG67	-1361.9	-3405.5	78	SEG130/SEG114	3398.0	-2933.0
22	N.C.	-1281.9	-3405.5	79	SEG131/SEG115	3398.0	-2853.0
23	SEG84/SEG68	-1201.9	-3405.5	80	SEG132/SEG116	3398.0	-2773.0
24	SEG85/SEG69	-1121.9	-3405.5	81	SEG133/SEG117	3398.0	-2693.0
25	SEG86/SEG70	-1041.9	-3405.5	82	SEG134/SEG118	3398.0	-2613.0
26	SEG87/SEG71	-961.9	-3405.5	83	SEG135/SEG119	3398.0	-2533.0
27	N.C.	-881.9	-3405.5	84	SEG136/SEG120	3398.0	-2453.0
28	SEG88/SEG72	-801.9	-3405.5	85	SEG137/SEG121	3398.0	-2373.0
29	SEG89/SEG73	-721.9	-3405.5	86	N.C.	3398.0	-2293.0
30	SEG90/SEG74	-641.9	-3405.5	87	SEG138/SEG122	3398.0	-2213.0
31	SEG91/SEG75	-561.9	-3405.5	88	SEG139/SEG123	3398.0	-2133.0
32	N.C.	-481.9	-3405.5	89	SEG140/SEG124	3398.0	-2053.0
33	SEG92/SEG76	-401.9	-3405.5	90	SEG141/SEG125	3398.0	-1973.0
34	SEG93/SEG77	-321.9	-3405.5	91	SEG142/SEG126	3398.0	-1893.0
35	SEG94/SEG78	-241.9	-3405.5	92	SEG143/SEG127	3398.0	-1813.0
36	N.C.	-161.9	-3405.5	93	N.C.	3398.0	-1733.0
37	SEG95/SEG79	-81.9	-3405.5	94	SEG144/SEG128	3398.0	-1653.0
38	SEG96/SEG80	-1.9	-3405.5	95	SEG145/SEG129	3398.0	-1573.0
39	N.C.	78.1	-3405.5	96	SEG146/SEG130	3398.0	-1493.0
40	SEG97/SEG81	158.1	-3405.5	97	SEG147/SEG131	3398.0	-1413.0
41	SEG98/SEG82	238.1	-3405.5	98	N.C.	3398.0	-1333.0
42	SEG99/SEG83	318.1	-3405.5	99	SEG148/SEG132	3398.0	-1253.0
43	N.C.	398.1	-3405.5	100	SEG149/SEG133	3398.0	-1173.0
44	SEG100/SEG84	478.1	-3405.5	101	SEG150/SEG134	3398.0	-1093.0
45	SEG101/SEG85	558.1	-3405.5	102	N.C.	3398.0	-1013.0
46	SEG102/SEG86	638.1	-3405.5	103	SEG151/SEG135	3398.0	-933.0
47	SEG103/SEG87	718.1	-3405.5	104	SEG152/SEG136	3398.0	-853.0
48	N.C.	798.1	-3405.5	105	SEG153/SEG137	3398.0	-773.0
49	SEG104/SEG88	878.1	-3405.5	106	N.C.	3398.0	-693.0
50	SEG105/SEG89	958.1	-3405.5	107	SEG154/SEG138	3398.0	-613.0
51	SEG106/SEG90	1038.1	-3405.5	108	SEG155/SEG139	3398.0	-533.0
52	SEG107/SEG91	1118.1	-3405.5	109	SEG156/SEG140	3398.0	-453.0
53	N.C.	1198.1	-3405.5	110	N.C.	3398.0	-373.0
54	SEG108/SEG92	1278.1	-3405.5	111	SEG157/SEG141	3398.0	-293.0
55	SEG109/SEG93	1358.1	-3405.5	112	SEG158/SEG142	3398.0	-213.0
56	SEG110/SEG94	1438.1	-3405.5	113	SEG159/SEG143	3398.0	-133.0
57	SEG111/SEG95	1518.1	-3405.5	114	N.C.	3398.0	-53.0

No.	Pad name	X (μm)	Y (μm)	No.	Pad name	X (μm)	Y (μm)
115	COM31/SEG144	3398.0	47.0	173	P12/SIN0/SDO1	1164.5	3405.5
116	COM30/SEG145	3398.0	127.0	174	N.C.	1084.5	3405.5
117	N.C.	3398.0	207.0	175	P13/TOUT3/CAP3/AIN7/SDO2	1004.5	3405.5
118	COM29/SEG146	3398.0	287.0	176	P14/TOUT4/CAP4/AIN6/SDI2	924.5	3405.5
119	COM28/SEG147	3398.0	367.0	177	N.C.	844.5	3405.5
120	COM27/SEG148	3398.0	447.0	178	P15/TOUT5/CAP5/AIN5/FOUTA	764.5	3405.5
121	N.C.	3398.0	527.0	179	P16/TOUT2/CAP2/AIN4	684.5	3405.5
122	COM26/SEG149	3398.0	607.0	180	P17/TOUT1/CAP1/AIN3	604.5	3405.5
123	COM25/SEG150	3398.0	687.0	181	N.C.	524.5	3405.5
124	COM24/SEG151	3398.0	767.0	182	Vss	444.5	3405.5
125	COM23/SEG152	3398.0	847.0	183	AVDD	364.5	3405.5
126	COM22/SEG153	3398.0	927.0	184	P20/AIN2/SPICLK2	284.5	3405.5
127	N.C.	3398.0	1007.0	185	P21/AIN1/#SPISS1	204.5	3405.5
128	COM21/SEG154	3398.0	1087.0	186	P22/AIN0/#SPISS2	124.5	3405.5
129	COM20/SEG155	3398.0	1167.0	187	VDD	44.5	3405.5
130	COM19/SEG156	3398.0	1247.0	188	N.C.	-35.5	3405.5
131	COM18/SEG157	3398.0	1327.0	189	P23(EXCL3)/SENB1	-115.5	3405.5
132	COM17/SEG158	3398.0	1407.0	190	P24/SENA1	-195.5	3405.5
133	COM16/SEG159	3398.0	1487.0	191	P25/REF1	-275.5	3405.5
134	Vss	3398.0	1667.5	192	P26/REFIN1	-355.5	3405.5
135	TEST3	3398.0	1757.5	193	Vss	-435.5	3405.5
136	TEST2	3398.0	1847.5	194	P27/REFIN0/SOUT1	-515.5	3405.5
137	TEST1	3398.0	1937.5	195	P30/REF0/SIN1	-595.5	3405.5
138	Vb2	3398.0	2027.5	196	P31/SENA0/SCL0	-675.5	3405.5
139	CG	3398.0	2117.5	197	P32/SENB0/SDA0	-755.5	3405.5
140	CF	3398.0	2207.5	198	N.C.	-835.5	3405.5
141	CE	3398.0	2297.5	199	P33/SCL1/SCL0	-915.5	3405.5
142	CD	3398.0	2387.5	200	P34/SDA1/SDA0	-995.5	3405.5
143	CC	3398.0	2477.5	201	P35/FOUTB/#BFR/#BZOUT	-1075.5	3405.5
144	CB	3398.0	2567.5	202	P36/TOUT7/CAP7/EXOSC3/BZOUT	-1155.5	3405.5
145	CA	3398.0	2657.5	203	P37/TOUT0/CAP0/LFRO/RFCLKO	-1235.5	3405.5
146	Vc5	3398.0	2747.5	204	DSIO/P40	-1315.5	3405.5
147	Vc4	3398.0	2837.5	205	DST2/P41	-1395.5	3405.5
148	Vc3	3398.0	2927.5	206	DCLK	-1475.5	3405.5
149	Vc2	3398.0	3017.5	207	TEST4	-1555.5	3405.5
150	Vc1	3398.0	3107.5	208	TEST5	-1635.5	3405.5
151	VDD	3064.5	3405.5	209	TEST6	-1715.5	3405.5
152	OSC3	2974.5	3405.5	210	COM0/SEG0	-1888.5	3405.5
153	OSC4	2884.5	3405.5	211	COM1/SEG1	-1968.5	3405.5
154	Vss	2794.5	3405.5	212	COM2/SEG2	-2048.5	3405.5
155	Vd1	2634.5	3405.5	213	COM3/SEG3	-2128.5	3405.5
156	OSC1	2544.5	3405.5	214	COM4/SEG4	-2208.5	3405.5
157	OSC2	2454.5	3405.5	215	COM5/SEG5	-2288.5	3405.5
158	#RESET	2364.5	3405.5	216	COM6/SEG6	-2368.5	3405.5
159	N.C.	2284.5	3405.5	217	COM7/SEG7	-2448.5	3405.5
160	P00(EXCL1)/REMO/SCLK0	2204.5	3405.5	218	COM8/SEG8	-2528.5	3405.5
161	P01(EXCL2)/REMI/SCLK1	2124.5	3405.5	219	COM9/SEG9	-2608.5	3405.5
162	P02/TOUT6/CAP6	2044.5	3405.5	220	COM10/SEG10	-2688.5	3405.5
163	N.C.	1964.5	3405.5	221	COM11/SEG11	-2768.5	3405.5
164	P03(EXCL0)/#ADTRG	1884.5	3405.5	222	COM12/SEG12	-2848.5	3405.5
165	P04/SPICLK0	1804.5	3405.5	223	COM13/SEG13	-2928.5	3405.5
166	P05/SDO0	1724.5	3405.5	224	COM14/SEG14	-3008.5	3405.5
167	N.C.	1644.5	3405.5	225	COM15/SEG15	-3088.5	3405.5
168	P06/SDI0	1564.5	3405.5	226	SEG0/SEG16	-3398	2987
169	P07/#SPISS0	1484.5	3405.5	227	SEG1/SEG17	-3398	2907
170	P10/SPICLK1	1404.5	3405.5	228	SEG2/SEG18	-3398	2827
171	N.C.	1324.5	3405.5	229	SEG3/SEG19	-3398	2747
172	P11/SOUT0/SDO1	1244.5	3405.5	230	SEG4/SEG20	-3398	2667

1 OVERVIEW

No.	Pad name	X (μm)	Y (μm)	No.	Pad name	X (μm)	Y (μm)
231	SEG5 /SEG21	-3398	2587	266	SEG34 /SEG50	-3398	-213
232	SEG6 /SEG22	-3398	2507	267	N.C.	-3398	-293
233	SEG7 /SEG23	-3398	2427	268	SEG35 /SEG51	-3398	-373
234	SEG8 /SEG24	-3398	2347	269	SEG36 /SEG52	-3398	-453
235	SEG9 /SEG25	-3398	2267	270	SEG37 /SEG53	-3398	-533
236	SEG10 /SEG26	-3398	2187	271	SEG38 /SEG54	-3398	-613
237	N.C.	-3398	2107	272	N.C.	-3398	-693
238	SEG11 /SEG27	-3398	2027	273	SEG39 /SEG55	-3398	-773
239	SEG12 /SEG28	-3398	1947	274	SEG40 /SEG56	-3398	-853
240	SEG13 /SEG29	-3398	1867	275	SEG41 /SEG57	-3398	-933
241	SEG14 /SEG30	-3398	1787	276	SEG42 /SEG58	-3398	-1013
242	N.C.	-3398	1707	277	N.C.	-3398	-1093
243	SEG15 /SEG31	-3398	1627	278	SEG43 /SEG59	-3398	-1173
244	SEG16 /SEG32	-3398	1547	279	SEG44 /SEG60	-3398	-1253
245	SEG17 /SEG33	-3398	1467	280	SEG45 /SEG61	-3398	-1333
246	SEG18 /SEG34	-3398	1387	281	SEG46 /SEG62	-3398	-1413
247	N.C.	-3398	1307	282	SEG47 /SEG63	-3398	-1493
248	SEG19 /SEG35	-3398	1227	283	N.C.	-3398	-1573
249	SEG20 /SEG36	-3398	1147	284	SEG48 /COM0	-3398	-1723
250	SEG21 /SEG37	-3398	1067	285	SEG49 /COM1	-3398	-1803
251	SEG22 /SEG38	-3398	987	286	SEG50 /COM2	-3398	-1883
252	N.C.	-3398	907	287	SEG51 /COM3	-3398	-1963
253	SEG23 /SEG39	-3398	827	288	SEG52 /COM4	-3398	-2043
254	SEG24 /SEG40	-3398	747	289	N.C.	-3398	-2123
255	SEG25 /SEG41	-3398	667	290	SEG53 /COM5	-3398	-2203
256	SEG26 /SEG42	-3398	587	291	SEG54 /COM6	-3398	-2283
257	N.C.	-3398	507	292	SEG55 /COM7	-3398	-2363
258	SEG27 /SEG43	-3398	427	293	SEG56 /COM8	-3398	-2443
259	SEG28 /SEG44	-3398	347	294	SEG57 /COM9	-3398	-2523
260	SEG29 /SEG45	-3398	267	295	SEG58 /COM10	-3398	-2603
261	SEG30 /SEG46	-3398	187	296	SEG59 /COM11	-3398	-2683
262	N.C.	-3398	107	297	SEG60 /COM12	-3398	-2763
263	SEG31 /SEG47	-3398	27	298	SEG61 /COM13	-3398	-2843
264	SEG32 /SEG48	-3398	-53	299	SEG62 /COM14	-3398	-2923
265	SEG33 /SEG49	-3398	-133	300	SEG63 /COM15	-3398	-3003

1.3.3 Pin Descriptions

Note: The pin names described in boldface type are default settings.

Table 1.3.3.1 Pin Descriptions

Pad/Pin No.		Name	I/O	Default status	Function
Chip	QFP				
1-17 *1	1-16	SEG64-79	O	O(L)	LCD segment output pins
		COM16-31	O	O(L)	LCD common output pins
18-113 *1	17-96	SEG80-159	O	O(L)	LCD segment output pins
		SEG64-143	O	O(L)	LCD segment output pins
115-133 *1	97-112	COM31-16	O	O(L)	LCD common output pins
		SEG144-159	O	O(L)	LCD segment output pins
134	113	Vss	–	–	Power supply pin (-)
135	114	TEST3	–	–	Test pin (Leave the pin open during normal operation.)
136	115	TEST2	–	–	Test pin (Leave the pin open during normal operation.)
137	–	TEST1	–	–	Test pin (Leave the pin open during normal operation.)
138	116	Vb2	–	–	LCD power voltage booster output pin
139	117	CG	–	–	Power supply voltage-boost capacitor connect pin
140	118	CF	–	–	Power supply voltage-boost capacitor connect pin
141	119	CE	–	–	LCD voltage-boost capacitor connect pin
142	120	CD	–	–	LCD voltage-boost capacitor connect pin
143	121	CC	–	–	LCD voltage-boost capacitor connect pin
144	122	CB	–	–	LCD voltage-boost capacitor connect pin

Pad/Pin No.		Name	I/O	Default status	Function
Chip	QFP				
145	123	CA	–	–	LCD voltage-boost capacitor connect pin
146	124	Vcs	–	–	LCD drive voltage output pin
147	125	Vc4	–	–	LCD drive voltage output pin
148	126	Vc3	–	–	LCD drive voltage output pin
149	127	Vc2	–	–	LCD drive voltage output pin
150	128	Vc1	–	–	LCD drive voltage output pin
151	129	Vdd	–	–	Power supply pin (+)
152	130	OSC3	I	I	OSC3 oscillator input pin
153	131	OSC4	O	O	OSC3 oscillator output pin
154	132	Vss	–	–	Power supply pin (-)
155	133	Vd1	–	–	Internal logic and oscillation system voltage regulator output pin
156	134	OSC1	I	I	OSC1 oscillator input pin
157	135	OSC2	O	O	OSC1 oscillator output pin
158	136	#RESET	I	I(Pull-up)	Initial reset input pin
160	137	P00(EXCL1)	I/O	Hi-Z	I/O port pin with interrupt input function (T16A Ch.1 external clock input pin)
		REMO	O		REMC output pin
		SCLK0	I		UART Ch.0 external clock input pin
161	138	P01(EXCL2)	I/O	Hi-Z	I/O port pin with interrupt input function (T16A Ch.2 external clock input pin)
		REMI	I		REMC input pin
		SCLK1	I		UART Ch.1 external clock input pin
162	139	P02	I/O	Hi-Z	I/O port pin with interrupt input function
		TOUT6	O		T16A Ch.3 TOUT A signal output pin
		CAP6	I		T16A Ch.3 capture A trigger signal input pin
164	140	P03(EXCL0)	I/O	Hi-Z	I/O port pin with interrupt input function
		#ADTRG	I		A/D converter external trigger signal input pin
165	141	P04	I/O	Hi-Z	I/O port pin with interrupt input function
		SPICK0	I/O		SPI Ch.0 clock input/output pin
166	142	P05	I/O	Hi-Z	I/O port pin with interrupt input function
		SDO0	O		SPI Ch.0 data output pin
168	143	P06	I/O	Hi-Z	I/O port pin with interrupt input function
		SDI0	I		SPI Ch.0 data input pin
169	144	P07	I/O	Hi-Z	I/O port pin with interrupt input function
		#SPISS0	I		SPI Ch.0 slave select signal input pin
170	145	P10	I/O	I(Pull-up)	I/O port pin with interrupt input function
		SPICK1	I/O		SPI Ch.1 clock input/output pin
172	146	P11	I/O	I(Pull-up)	I/O port pin with interrupt input function
		SOUT0	O		UART Ch.0 data output pin
		SDO1	O		SPI Ch.1 data output pin
173	147	P12	I/O	I(Pull-up)	I/O port pin with interrupt input function
		SIN0	I		UART Ch.0 data input pin
		SDI1	I		SPI Ch.1 data input pin
175	148	P13	I/O	I(Pull-up)	I/O port pin with interrupt input function
		TOUT3	O		T16A Ch.1 TOUT B signal output pin
		CAP3	I		T16A Ch.1 capture B trigger signal input pin
		AIN7	I		A/D converter Ch.7 analog signal input pin
		SDO2	O		SPI Ch.2 data output pin
176	149	P14	I/O	I(Pull-up)	I/O port pin with interrupt input function
		TOUT4	O		T16A Ch.2 TOUT A signal output pin
		CAP4	I		T16A Ch.2 capture A trigger signal input pin
		AIN6	I		A/D converter Ch.6 analog signal input pin
		SDI2	I		SPI Ch.2 data input pin
178	150	P15	I/O	I(Pull-up)	I/O port pin with interrupt input function
		TOUT5	O		T16A Ch.2 TOUT B signal output pin
		CAP5	I		T16A Ch.2 capture B trigger signal input pin
		AIN5	I		A/D converter Ch.5 analog signal input pin
		FOUTA	O		Clock output pin
179	151	P16	I/O	I(Pull-up)	I/O port pin with interrupt input function
		TOUT2	O		T16A Ch.1 TOUT A signal output pin
		CAP2	I		T16A Ch.1 capture A trigger signal input pin
		AIN4	I		A/D converter Ch.4 analog signal input pin

1 OVERVIEW

Pad/Pin No.		Name	I/O	Default status	Function
Chip	QFP				
180	152	P17	I/O	I(Pull-up)	I/O port pin with interrupt input function
		TOUT1	O		T16A Ch.0 TOUT B signal output pin
		CAP1	I		T16A Ch.0 capture B trigger signal input pin
		AIN3	I		A/D converter Ch.3 analog signal input pin
182	153	Vss	–	–	Power supply pin (-)
183	154	AVbb	–	–	Analog power supply pin (+)
184	155	P20	I/O	Hi-Z	I/O port pin with interrupt input function
		AIN2	I		A/D converter Ch.2 analog signal input pin
		SPICLK2	I/O		SPI Ch.2 clock input/output pin
185	156	P21	I/O	Hi-Z	I/O port pin with interrupt input function
		AIN1	I		A/D converter Ch.1 analog signal input pin
		#SPISS1	I		SPI Ch.1 slave select signal input pin
186	157	P22	I/O	Hi-Z	I/O port pin with interrupt input function
		AIN0	I		A/D converter Ch.0 analog signal input pin
		#SPISS2	I		SPI Ch.2 slave select signal input pin
187	158	Vdd	–	–	Power supply pin (+)
189	159	P23(EXCL3)	I/O	Hi-Z	I/O port pin with interrupt input function
		SENB1	I/O		R/F converter Ch.1 sensor B oscillation control pin
190	160	P24	I/O	Hi-Z	I/O port pin with interrupt input function
		SENA1	I/O		R/F converter Ch.1 sensor A oscillation control pin
191	161	P25	I/O	Hi-Z	I/O port pin with interrupt input function
		REF1	I/O		R/F converter Ch.1 reference oscillation control pin
192	162	P26	I/O	Hi-Z	I/O port pin with interrupt input function
		RFIN1	I/O		R/F converter Ch.1 RFCLK input and oscillation control pin
193	163	Vss	–	–	Power supply pin (-)
194	164	P27	I/O	Hi-Z	I/O port pin with interrupt input function
		RFIN0	I/O		R/F converter Ch.0 RFCLK input and oscillation control pin
		SOUT1	O		UART Ch.1 data output pin
195	165	P30	I/O	Hi-Z	I/O port pin with interrupt input function
		REF0	I/O		R/F converter Ch.0 reference oscillation control pin
		SIN1	I		UART Ch.1 data input pin
196	166	P31	I/O	Hi-Z	I/O port pin with interrupt input function
		SENA0	I/O		R/F converter Ch.0 sensor A oscillation control pin
		SCL0	I/O		I ² C master SCL input/output pin
197	167	P32	I/O	Hi-Z	I/O port pin with interrupt input function
		SENB0	I/O		R/F converter Ch.0 sensor B oscillation control pin
		SDA0	I/O		I ² C master data input/output pin
199	168	P33	I/O	Hi-Z	I/O port pin with interrupt input function
		SCL1	I/O		I ² C slave SCL input/output pin
		SCL0	I/O		I ² C master SCL input/output pin
200	169	P34	I/O	Hi-Z	I/O port pin with interrupt input function
		SDA1	I/O		I ² C slave data input/output pin
		SDA0	I/O		I ² C master data input/output pin
201	170	P35	I/O	Hi-Z	I/O port pin with interrupt input function
		FOUTB	O		Clock output pin
		#BFR	I		I ² C slave bus free request input pin
		#BZOUT	O		SND reverse output pin
202	171	P36	I/O	Hi-Z	I/O port pin with interrupt input function
		TOUT7	O		T16A Ch.3 TOUT B signal output pin
		CAP7	I		T16A Ch.3 capture B trigger signal input pin
		EXOSC3	I		OSC3 external clock input pin
		BZOUT	O		SND output pin
203	172	P37	I/O	Hi-Z	I/O port pin with interrupt input function
		TOUT0	O		T16A Ch.0 TOUT A signal output pin
		CAP0	I		T16A Ch.0 capture A trigger signal input pin
		LFRO	O		LCD frame signal output pin
		RFCLKO	O		R/F clock monitor output pin
204	173	DSIO	I/O	I(Pull-up)	On-chip debugger data input/output pin
		P40	I/O		I/O port pin
205	174	DST2	O	O(L)	On-chip debugger status output pin
		P41	I/O		I/O port pin
206	175	DCLK	O	O(H)	On-chip debugger clock output pin
207	–	TEST4	–	–	Test pin (Leave the pin open during normal operation.)

Pad/Pin No.		Name	I/O	Default status	Function
Chip	QFP				
208	176	TEST5	–	–	Test pin (Leave the pin open during normal operation.)
209	–	TEST6	–	–	Test pin (Leave the pin open during normal operation.)
210-225 *1	177-192	COM0-15	O	O(L)	LCD common output pins
		SEG0-SEG15	O	O(L)	LCD segment output pins
226-282 *1	193-240	SEG0-47	O	O(L)	LCD segment output pins
		SEG16-63	O	O(L)	LCD segment output pins
284-300 *1	241-256	SEG48-63	O	O(L)	LCD segment output pins
		COM0-15	O	O(L)	LCD common output pins

*1: NC PAD: 11, 22, 27, 32, 36, 39, 43, 48, 53, 59, 65, 86, 93, 98, 102, 106, 110, 114, 117, 121, 127, 159, 163, 167, 171, 174, 177, 181, 188, 198, 237, 242, 247, 252, 257, 262, 267, 272, 277, 283, 289

2 CPU

The S1C17706 contains the S1C17 Core as its core processor.

The S1C17 Core is a Seiko Epson original 16-bit RISC-type processor.

It features low power consumption, high-speed operation, large address space, main instructions executable in one clock cycle, and a small sized design. The S1C17 Core is suitable for embedded applications such as controllers and sequencers for which an eight-bit CPU is commonly used.

For details of the S1C17 Core, refer to the “S1C17 Family S1C17 Core Manual.”

2.1 Features of the S1C17 Core

Processor type

- Seiko Epson original 16-bit RISC processor
- 0.35–0.15 μm low power CMOS process technology

Instruction set

- Code length: 16-bit fixed length
- Number of instructions: 111 basic instructions (184 including variations)
- Execution cycle: Main instructions executed in one cycle
- Extended immediate instructions: Immediate extended up to 24 bits
- Compact and fast instruction set optimized for development in C language

Register set

- Eight 24-bit general-purpose registers
- Two 24-bit special registers
- One 8-bit special register

Memory space and bus

- Up to 16M bytes of memory space (24-bit address)
- Harvard architecture using separated instruction bus (16 bits) and data bus (32 bits)

Interrupts

- Reset, NMI, and 32 external interrupts supported
- Address misaligned interrupt
- Debug interrupt
- Direct branching from vector table to interrupt handler routine
- Programmable software interrupts with a vector number specified (all vector numbers specifiable)

Power saving

- HALT (`halt` instruction)
- SLEEP (`sleep` instruction)

Coprocessor interface

- 16-bit \times 16-bit multiplier
- 16-bit \div 16-bit divider
- 16-bit \times 16-bit + 32-bit multiply and accumulation unit

2.2 CPU Registers

The S1C17 Core contains eight general-purpose registers and three special registers.

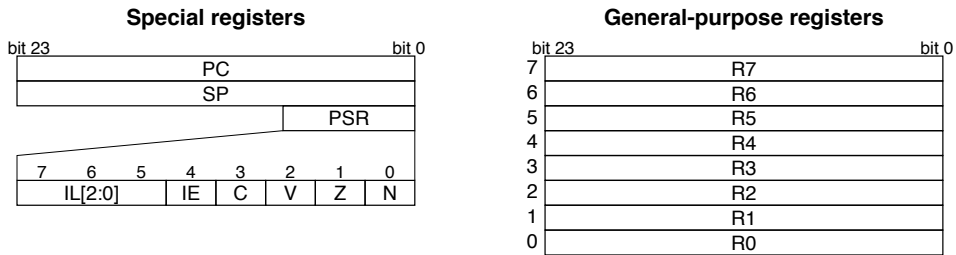


Figure 2.2.1 Registers

2.3 Instruction Set

The S1C17 Core instruction codes are all fixed to 16 bits in length which, combined with pipelined processing, allows most important instructions to be executed in one cycle. For details, refer to the “S1C17 Family S1C17 Core Manual.”

Table 2.3.1 List of S1C17 Core Instructions

Classification	Mnemonic	Function	
Data transfer	1d.b	$\%rd, \%rs$	General-purpose register (byte) → general-purpose register (sign-extended)
		$\%rd, [\%rb]$	Memory (byte) → general-purpose register (sign-extended)
		$\%rd, [\%rb]+$	Memory address post-increment, post-decrement, and pre-decrement functions can be used.
		$\%rd, [\%rb]-$	
		$\%rd, -[\%rb]$	
		$\%rd, [\%sp+imm7]$	Stack (byte) → general-purpose register (sign-extended)
		$\%rd, imm7]$	Memory (byte) → general-purpose register (sign-extended)
		$[\%rb], \%rs$	General-purpose register (byte) → memory
		$[\%rb]+, \%rs$	Memory address post-increment, post-decrement, and pre-decrement functions can be used.
		$[\%rb]-, \%rs$	
	$-[\%rb], \%rs$		
	$[\%sp+imm7], \%rs$	General-purpose register (byte) → stack	
	$imm7], \%rs$	General-purpose register (byte) → memory	
	1d.ub	$\%rd, \%rs$	General-purpose register (byte) → general-purpose register (zero-extended)
		$\%rd, [\%rb]$	Memory (byte) → general-purpose register (zero-extended)
		$\%rd, [\%rb]+$	Memory address post-increment, post-decrement, and pre-decrement functions can be used.
		$\%rd, [\%rb]-$	
		$\%rd, -[\%rb]$	
		$\%rd, [\%sp+imm7]$	Stack (byte) → general-purpose register (zero-extended)
	$\%rd, imm7]$	Memory (byte) → general-purpose register (zero-extended)	
1d	$\%rd, \%rs$	General-purpose register (16 bits) → general-purpose register	
	$\%rd, sign7$	Immediate → general-purpose register (sign-extended)	
	$\%rd, [\%rb]$	Memory (16 bits) → general-purpose register	
	$\%rd, [\%rb]+$	Memory address post-increment, post-decrement, and pre-decrement functions can be used.	
	$\%rd, [\%rb]-$		
	$\%rd, -[\%rb]$		
	$\%rd, [\%sp+imm7]$	Stack (16 bits) → general-purpose register	
	$\%rd, imm7]$	Memory (16 bits) → general-purpose register	
	$[\%rb], \%rs$	General-purpose register (16 bits) → memory	
	$[\%rb]+, \%rs$	Memory address post-increment, post-decrement, and pre-decrement functions can be used.	
	$[\%rb]-, \%rs$		
	$-[\%rb], \%rs$		
$[\%sp+imm7], \%rs$	General-purpose register (16 bits) → stack		
$imm7], \%rs$	General-purpose register (16 bits) → memory		
1d.a	$\%rd, \%rs$	General-purpose register (24 bits) → general-purpose register	
	$\%rd, imm7$	Immediate → general-purpose register (zero-extended)	

Classification	Mnemonic	Function	
Data transfer	ld.a	$\%rd, [\%rb]$	Memory (32 bits) → general-purpose register (*1)
		$\%rd, [\%rb] +$	Memory address post-increment, post-decrement, and pre-decrement functions can be used.
		$\%rd, [\%rb] -$	
		$\%rd, -[\%rb]$	
		$\%rd, [\%sp+imm7]$	
		$\%rd, [imm7]$	Memory (32 bits) → general-purpose register (*1)
		$[\%rb], \%rs$	General-purpose register (32 bits, zero-extended) → memory (*1)
		$[\%rb] +, \%rs$	Memory address post-increment, post-decrement, and pre-decrement functions can be used.
		$[\%rb] -, \%rs$	
		$-[\%rb], \%rs$	
		$[\%sp+imm7], \%rs$	General-purpose register (32 bits, zero-extended) → stack (*1)
		$[imm7], \%rs$	General-purpose register (32 bits, zero-extended) → memory (*1)
		$\%rd, \%sp$	SP → general-purpose register
		$\%rd, \%pc$	PC → general-purpose register
		$\%rd, [\%sp]$	Stack (32 bits) → general-purpose register (*1)
		$\%rd, [\%sp] +$	Stack pointer post-increment, post-decrement, and pre-decrement functions can be used.
		$\%rd, [\%sp] -$	
		$\%rd, -[\%sp]$	
		$[\%sp], \%rs$	General-purpose register (32 bits, zero-extended) → stack (*1)
		$[\%sp] +, \%rs$	Stack pointer post-increment, post-decrement, and pre-decrement functions can be used.
$[\%sp] -, \%rs$			
$-[\%sp], \%rs$			
$\%sp, \%rs$	General-purpose register (24 bits) → SP		
$\%sp, imm7$	Immediate → SP		
Integer arithmetic operation	add	$\%rd, \%rs$	16-bit addition between general-purpose registers
	add/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).
	add/nc		
	add	$\%rd, imm7$	
	add.a	$\%rd, \%rs$	24-bit addition between general-purpose registers
	add.a/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).
	add.a/nc		
	add.a	$\%sp, \%rs$	
		$\%rd, imm7$	24-bit addition of general-purpose register and immediate
		$\%sp, imm7$	24-bit addition of SP and immediate
	adc	$\%rd, \%rs$	16-bit addition with carry between general-purpose registers
	adc/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).
	adc/nc		
	adc	$\%rd, imm7$	
	sub	$\%rd, \%rs$	16-bit subtraction between general-purpose registers
	sub/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).
	sub/nc		
	sub	$\%rd, imm7$	
	sub.a	$\%rd, \%rs$	24-bit subtraction between general-purpose registers
	sub.a/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).
	sub.a/nc		
	sub.a	$\%sp, \%rs$	
		$\%rd, imm7$	24-bit subtraction of general-purpose register and immediate
		$\%sp, imm7$	24-bit subtraction of SP and immediate
	sbc	$\%rd, \%rs$	16-bit subtraction with carry between general-purpose registers
	sbc/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).
	sbc/nc		
	sbc	$\%rd, imm7$	
	cmp	$\%rd, \%rs$	16-bit comparison between general-purpose registers
	cmp/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).
	cmp/nc		
	cmp	$\%rd, sign7$	
	cmp.a	$\%rd, \%rs$	24-bit comparison between general-purpose registers
cmp.a/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).	
cmp.a/nc			
cmp.a	$\%rd, imm7$		24-bit comparison of general-purpose register and immediate
cmc	$\%rd, \%rs$	16-bit comparison with carry between general-purpose registers	
cmc/c		Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).	
cmc/nc			
cmc	$\%rd, sign7$		16-bit comparison of general-purpose register and immediate with carry

Classification	Mnemonic	Function		
Logical operation	and	$\%rd, \%rs$	Logical AND between general-purpose registers Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).	
	and/c			
	and/nc			
	and	$\%rd, sign7$	Logical AND of general-purpose register and immediate	
	or	$\%rd, \%rs$	Logical OR between general-purpose registers Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).	
	or/c			
	or/nc			
	or	$\%rd, sign7$	Logical OR of general-purpose register and immediate	
	xor	$\%rd, \%rs$	Exclusive OR between general-purpose registers Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).	
	xor/c			
	xor/nc			
	xor	$\%rd, sign7$	Exclusive OR of general-purpose register and immediate	
	not	$\%rd, \%rs$	Logical inversion between general-purpose registers (1's complement) Supports conditional execution (/c: executed if C = 1, /nc: executed if C = 0).	
not/c				
not/nc				
not	$\%rd, sign7$	Logical inversion of general-purpose register and immediate (1's complement)		
Shift and swap	sr	$\%rd, \%rs$	Logical shift to the right with the number of bits specified by the register	
		$\%rd, imm7$	Logical shift to the right with the number of bits specified by immediate	
	sa	$\%rd, \%rs$	Arithmetic shift to the right with the number of bits specified by the register	
		$\%rd, imm7$	Arithmetic shift to the right with the number of bits specified by immediate	
	s1	$\%rd, \%rs$	Logical shift to the left with the number of bits specified by the register	
		$\%rd, imm7$	Logical shift to the left with the number of bits specified by immediate	
swap	$\%rd, \%rs$	Bitwise swap on byte boundary in 16 bits		
Immediate extension	ext	$imm13$	Extend operand in the following instruction	
Conversion	cv.ab	$\%rd, \%rs$	Converts signed 8-bit data into 24 bits	
	cv.as	$\%rd, \%rs$	Converts signed 16-bit data into 24 bits	
	cv.al	$\%rd, \%rs$	Converts 32-bit data into 24 bits	
	cv.la	$\%rd, \%rs$	Converts 24-bit data into 32 bits	
	cv.ls	$\%rd, \%rs$	Converts 16-bit data into 32 bits	
Branch	jpr	$sign10$	PC relative jump	
	jpr.d	$\%rb$	Delayed branching possible	
	jpa	$imm7$	Absolute jump	
	jpa.d	$\%rb$	Delayed branching possible	
	jrgt	$sign7$	PC relative conditional jump	Branch condition: !Z & !(N ^ V)
	jrgt.d		Delayed branching possible	
	jrge	$sign7$	PC relative conditional jump	Branch condition: !(N ^ V)
	jrge.d		Delayed branching possible	
	jrlt	$sign7$	PC relative conditional jump	Branch condition: N ^ V
	jrlt.d		Delayed branching possible	
	jrle	$sign7$	PC relative conditional jump	Branch condition: Z N ^ V
	jrle.d		Delayed branching possible	
	jrugt	$sign7$	PC relative conditional jump	Branch condition: !Z & !C
	jrugt.d		Delayed branching possible	
	jruge	$sign7$	PC relative conditional jump	Branch condition: !C
	jruge.d		Delayed branching possible	
	jrult	$sign7$	PC relative conditional jump	Branch condition: C
	jrult.d		Delayed branching possible	
	jrule	$sign7$	PC relative conditional jump	Branch condition: Z C
	jrule.d		Delayed branching possible	
	jreq	$sign7$	PC relative conditional jump	Branch condition: Z
	jreq.d		Delayed branching possible	
	jrne	$sign7$	PC relative conditional jump	Branch condition: !Z
	jrne.d		Delayed branching possible	
	call	$sign10$	PC relative subroutine call	
	call.d	$\%rb$	Delayed call possible	
	calla	$imm7$	Absolute subroutine call	
calla.d	$\%rb$	Delayed call possible		
ret		Return from subroutine		
ret.d		Delayed return possible		
int	$imm5$	Software interrupt		
intl	$imm5, imm3$	Software interrupt with interrupt level setting		
reti		Return from interrupt handling		
reti.d		Delayed call possible		
brk		Debug interrupt		

Classification	Mnemonic		Function
Branch	retd		Return from debug processing
System control	nop		No operation
	halt		HALT mode
	slp		SLEEP mode
	ei		Enable interrupts
	di		Disable interrupts
Coprorocessor control	ld.cw	$\%rd, \%rs$	Transfer data to coprocessor
		$\%rd, imm7$	
	ld.ca	$\%rd, \%rs$	Transfer data to coprocessor and get results and flag statuses
		$\%rd, imm7$	
ld.cf	$\%rd, \%rs$	Transfer data to coprocessor and get flag statuses	
	$\%rd, imm7$		

*1 The ld.a instruction accesses memories in 32-bit length. During data transfer from a register to a memory, the 32-bit data in which the eight high-order bits are set to 0 is written to the memory. During reading from a memory, the eight high-order bits of the read data are ignored.

The symbols in the above table each have the meanings specified below.

Table 2.3.2 Symbol Meanings

Symbol	Description
$\%rs$	General-purpose register, source
$\%rd$	General-purpose register, destination
[$\%rb$]	Memory addressed by general-purpose register
[$\%rb$] +	Memory addressed by general-purpose register with address post-incremented
[$\%rb$] -	Memory addressed by general-purpose register with address post-decremented
- [$\%rb$]	Memory addressed by general-purpose register with address pre-decremented
$\%sp$	Stack pointer
[$\%sp$], [$\%sp+imm7$]	Stack
[$\%sp$] +	Stack with address post-incremented
[$\%sp$] -	Stack with address post-decremented
- [$\%sp$]	Stack with address pre-decremented
$imm3, imm5, imm7, imm13$	Unsigned immediate (numerals indicating bit length)
$sign7, sign10$	Signed immediate (numerals indicating bit length)

2.4 Reading PSR

The S1C17706 includes the MISC_PSR register for reading the contents of the PSR (Processor Status Register) in the S1C17 Core. Reading the contents of this register makes it possible to check the contents of the PSR using the application software. Note that data cannot be written to the PSR.

PSR Register (MISC_PSR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
PSR Register (MISC_PSR)	0x532c (16 bits)	D15-8	-	reserved	-	-	-	0 when being read.
		D7-5	PSRIL[2:0]	PSR interrupt level (IL) bits	0x0 to 0x7	0x0	R	
		D4	PSRIE	PSR interrupt enable (IE) bit	1 1 (enable) 0 0 (disable)	0	R	
		D3	PSRC	PSR carry (C) flag	1 1 (set) 0 0 (cleared)	0	R	
		D2	PSRV	PSR overflow (V) flag	1 1 (set) 0 0 (cleared)	0	R	
		D1	PSRZ	PSR zero (Z) flag	1 1 (set) 0 0 (cleared)	0	R	
		D0	PSRN	PSR negative (N) flag	1 1 (set) 0 0 (cleared)	0	R	

D[15:8] Reserved

D[7:5] PSRIL[2:0]: PSR Interrupt Level (IL) Bits

The value of the PSR IL (interrupt level) bits can be read out. (Default: 0x0)

D4 PSRIE: PSR Interrupt Enable (IE) Bit

The value of the PSR IE (interrupt enable) bit can be read out.

1 (R): 1 (interrupt enabled)

0 (R): 0 (interrupt disabled) (default)

2 CPU

D3 PSRC: PSR Carry (C) Flag Bit

The value of the PSR C (carry) flag can be read out.

1 (R): 1

0 (R): 0 (default)

D2 PSRV: PSR Overflow (V) Flag Bit

The value of the PSR V (overflow) flag can be read out.

1 (R): 1

0 (R): 0 (default)

D1 PSRZ: PSR Zero (Z) Flag Bit

The value of the PSR Z (zero) flag can be read out.

1 (R): 1

0 (R): 0 (default)

D0 PSRN: PSR Negative (N) Flag Bit

The value of the PSR N (negative) flag can be read out.

1 (R): 1

0 (R): 0 (default)

2.5 Processor Information

The S1C17706 has the IDIR register shown below that allows the application software to identify CPU core type.

Processor ID Register (IDIR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Processor ID Register (IDIR)	0xffff84 (8 bits)	D7-0	IDIR[7:0]	Processor ID 0x10: S1C17 Core	0x10	0x10	R	

This is a read-only register that contains the ID code to represent a processor model. The S1C17 Core's ID code is 0x10.

3 Memory Map, Bus Control

Figure 3.1 shows the S1C17706 memory map.

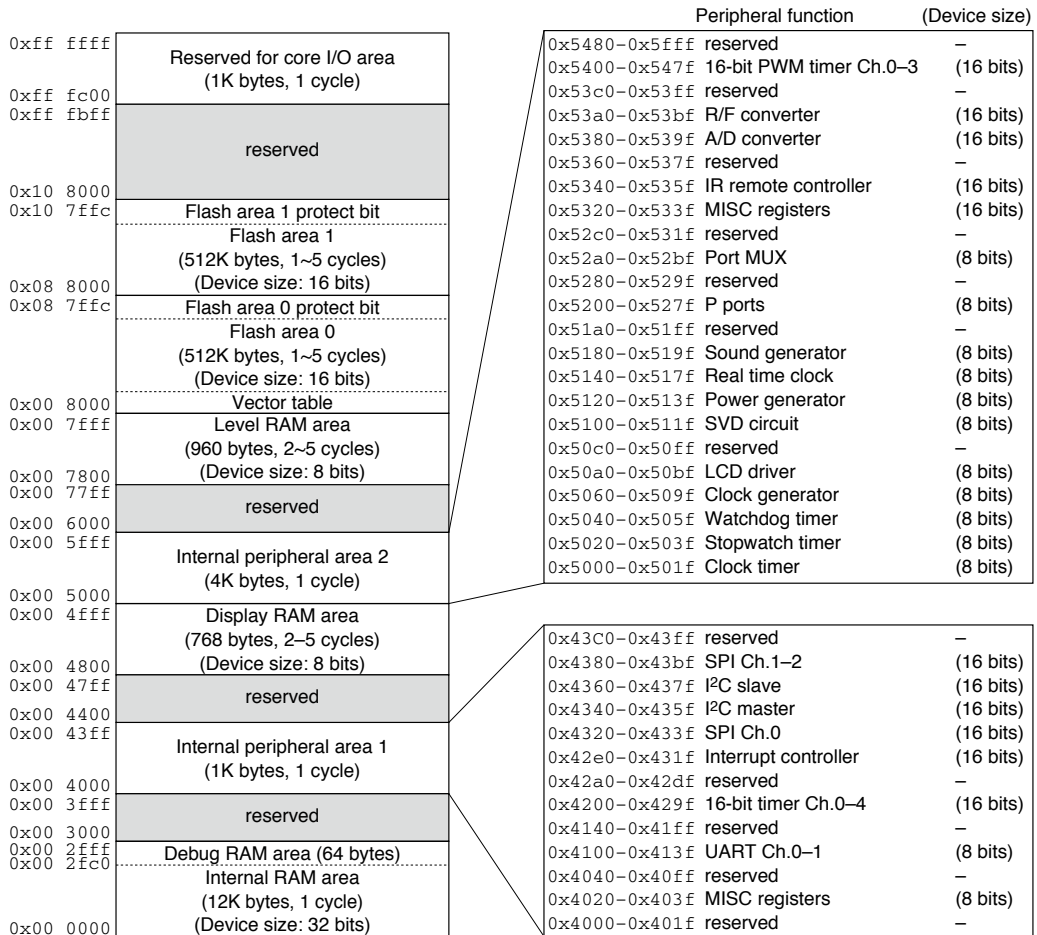


Figure 3.1 S1C17706 Memory Map

3.1 Bus Cycle

The CPU operates with CCLK as the operating clock. For CCLK, see “Controlling the CPU Core Clock (CCLK)” in the “Clock Generator (CLG)” chapter.

The period between a CCLK rising edge and the next rising edge is assumed to be one CCLK (= one bus cycle). As shown in Figure 3.1, the number of cycles required for one bus access depends on the peripheral or memory module. Furthermore, the number of bus accesses depends on the CPU instruction (access size) and device size.

Table 3.1.1 Number of Bus Accesses

Device size	CPU access size	Number of bus accesses
8 bits	8 bits	1
	16 bits	2
	32 bits*	4
16 bits	8 bits	1
	16 bits	1
	32 bits*	2
32 bits	8 bits	1
	16 bits	1
	32 bits*	1

3 MEMORY MAP, BUS CONTROL

* Handling the eight high-order bits during 32-bit accesses

During writing, the eight high-order bits are written as 0. During reading from a memory, the eight high-order bits are ignored. However, the stack operation in an interrupt handling reads/writes 32-bit data that consists of the PSR value as the high-order 8 bits and the return address as the low order 24 bits.

Number of bus cycles calculation example

Number of bus cycles when the CPU accesses the display RAM area (eight-bit device, set to two access cycles) by a 16-bit read or write instruction.

$$2 \text{ [cycles]} \times 2 \text{ [bus accesses]} = 4 \text{ [CCLK cycles]}$$

3.1.1 Restrictions on Access Size

The modules shown below have a restriction on the access size. Appropriate instructions should be used in programming.

Flash memory

The Flash memory allows only 16-bit write instructions for programming. Reading data from the Flash memory has no such restriction.

Other modules can be accessed with an 8-bit, 16-bit, or 32-bit instruction. However, reading for an unnecessary register may change the peripheral module status and it may cause a problem. Therefore, use the appropriate instructions according to the device size.

3.1.2 Restrictions on Instruction Execution Cycles

An instruction fetch and a data access are not performed simultaneously under one of the conditions listed below. This prolongs the instruction fetch cycle for the number of data area access cycles.

- When the S1C17706 executes the instruction stored in the Flash area and accesses data in the Flash area or display RAM area
- When the S1C17706 executes the instruction stored in the internal RAM area and accesses data in the internal RAM area

3.2 Flash Area

3.2.1 Internal Flash Memory

The 1M-byte area from address 0x8000 to address 0x107fff contains a Flash memory (4K bytes × 256 sectors) for storing application programs and data. Address 0x8000 is defined as the vector table base address, therefore a vector table (see “Vector Table” in the “Interrupt Controller (ITC)” chapter) must be placed from the beginning of the area. The vector table base address can be modified with the MISC_TTBRL/MISC_TTBRH registers.

The Flash memory can be read in 1 to 5 cycles.

3.2.2 Flash Programming

The S1C17706 supports on-board programming of the Flash memory, it makes it possible to program the Flash memory with the application programs/data by using the debugger through an ICDmini (S5U1C17001H). Furthermore, the S1C17706 supports self-programming by the application program. The Flash memory can be programmed in 16-bit units. The Flash memory supports two erase methods, chip erase and sector erase.

For the Flash programming using the debugger, see the “S5U1C17001C Manual” included in the S1C17 Family C Compiler Package. For the self-programming controlled by the user program, see the “Self-Programming (FLS) Application Notes” for the S1C17706.

Note: The debugger supports chip erase only and does not allow erasing in sector units.

3.2.3 Protect Bits

In order to protect the memory contents, the Flash memory provides two protection features, write protection and data read protection, that can be configured for every 32K-byte areas. The write protection disables writing data to the configured area. The data-read protection disables reading data from the configured area (the read value is always 0x0000). However, it does not disable the instruction fetch operation by the CPU.

The Flash memory provides the protect bits listed below. Program the protect bit corresponding to the area to be protected to 0.

Flash Protect Bits

Address	Bit	Function	Setting			Init.	R/W	Remarks
0x87ffc (16 bits)	D15	Flash write-protect bit for 0x80000–0x87fff	1	Writable	0	Protected	1	R/W
	D14	Flash write-protect bit for 0x78000–0x7ffff	1	Writable	0	Protected	1	R/W
	D13	Flash write-protect bit for 0x70000–0x77fff	1	Writable	0	Protected	1	R/W
	D12	Flash write-protect bit for 0x68000–0x6ffff	1	Writable	0	Protected	1	R/W
	D11	Flash write-protect bit for 0x60000–0x67fff	1	Writable	0	Protected	1	R/W
	D10	Flash write-protect bit for 0x58000–0x5ffff	1	Writable	0	Protected	1	R/W
	D9	Flash write-protect bit for 0x50000–0x57fff	1	Writable	0	Protected	1	R/W
	D8	Flash write-protect bit for 0x48000–0x4ffff	1	Writable	0	Protected	1	R/W
	D7	Flash write-protect bit for 0x40000–0x47fff	1	Writable	0	Protected	1	R/W
	D6	Flash write-protect bit for 0x38000–0x3ffff	1	Writable	0	Protected	1	R/W
	D5	Flash write-protect bit for 0x30000–0x37fff	1	Writable	0	Protected	1	R/W
	D4	Flash write-protect bit for 0x28000–0x2ffff	1	Writable	0	Protected	1	R/W
	D3	Flash write-protect bit for 0x20000–0x27fff	1	Writable	0	Protected	1	R/W
	D2	Flash write-protect bit for 0x18000–0x1ffff	1	Writable	0	Protected	1	R/W
D1	Flash write-protect bit for 0x10000–0x17fff	1	Writable	0	Protected	1	R/W	
D0	Flash write-protect bit for 0x8000–0xffff	1	Writable	0	Protected	1	R/W	
Address	Bit	Function	Setting			Init.	R/W	Remarks
0x87ffe (16 bits)	D15	Flash data-read-protect bit for 0x80000–0x87fff	1	Readable	0	Protected	1	R/W
	D14	Flash data-read-protect bit for 0x78000–0x7ffff	1	Readable	0	Protected	1	R/W
	D13	Flash data-read-protect bit for 0x70000–0x77fff	1	Readable	0	Protected	1	R/W
	D12	Flash data-read-protect bit for 0x68000–0x6ffff	1	Readable	0	Protected	1	R/W
	D11	Flash data-read-protect bit for 0x60000–0x67fff	1	Readable	0	Protected	1	R/W
	D10	Flash data-read-protect bit for 0x58000–0x5ffff	1	Readable	0	Protected	1	R/W
	D9	Flash data-read-protect bit for 0x50000–0x57fff	1	Readable	0	Protected	1	R/W
	D8	Flash data-read-protect bit for 0x48000–0x4ffff	1	Readable	0	Protected	1	R/W
	D7	Flash data-read-protect bit for 0x40000–0x47fff	1	Readable	0	Protected	1	R/W
	D6	Flash data-read-protect bit for 0x38000–0x3ffff	1	Readable	0	Protected	1	R/W
	D5	Flash data-read-protect bit for 0x30000–0x37fff	1	Readable	0	Protected	1	R/W
	D4	Flash data-read-protect bit for 0x28000–0x2ffff	1	Readable	0	Protected	1	R/W
	D3	Flash data-read-protect bit for 0x20000–0x27fff	1	Readable	0	Protected	1	R/W
	D2	Flash data-read-protect bit for 0x18000–0x1ffff	1	Readable	0	Protected	1	R/W
D1	Flash data-read-protect bit for 0x10000–0x17fff	1	Readable	0	Protected	1	R/W	
D0	reserved		1			1	R/W	Always set to 1.
Address	Bit	Function	Setting			Init.	R/W	Remarks
0x107ffc (16 bits)	D15	Flash write-protect bit for 0x100000–0x107fff	1	Writable	0	Protected	1	R/W
	D14	Flash write-protect bit for 0xf8000–0xffff	1	Writable	0	Protected	1	R/W
	D13	Flash write-protect bit for 0xf0000–0xf7fff	1	Writable	0	Protected	1	R/W
	D12	Flash write-protect bit for 0xe8000–0xeffff	1	Writable	0	Protected	1	R/W
	D11	Flash write-protect bit for 0xe0000–0xe7fff	1	Writable	0	Protected	1	R/W
	D10	Flash write-protect bit for 0xd8000–0xdffff	1	Writable	0	Protected	1	R/W
	D9	Flash write-protect bit for 0xd0000–0xd7fff	1	Writable	0	Protected	1	R/W
	D8	Flash write-protect bit for 0xc8000–0xcffff	1	Writable	0	Protected	1	R/W
	D7	Flash write-protect bit for 0xc0000–0xc7fff	1	Writable	0	Protected	1	R/W
	D6	Flash write-protect bit for 0xb8000–0xbffff	1	Writable	0	Protected	1	R/W
	D5	Flash write-protect bit for 0xb0000–0xb7fff	1	Writable	0	Protected	1	R/W
	D4	Flash write-protect bit for 0xa8000–0xaffff	1	Writable	0	Protected	1	R/W
	D3	Flash write-protect bit for 0xa0000–0xa7fff	1	Writable	0	Protected	1	R/W
	D2	Flash write-protect bit for 0x98000–0x9ffff	1	Writable	0	Protected	1	R/W
D1	Flash write-protect bit for 0x90000–0x97fff	1	Writable	0	Protected	1	R/W	
D0	Flash write-protect bit for 0x88000–0x8ffff	1	Writable	0	Protected	1	R/W	

3 MEMORY MAP, BUS CONTROL

Address	Bit	Function	Setting				Init.	R/W	Remarks
0x107ffe (16 bits)	D15	Flash data-read-protect bit for 0x100000–0x107fff	1	Readable	0	Protected	1	R/W	
	D14	Flash data-read-protect bit for 0xf8000–0xffff	1	Readable	0	Protected	1	R/W	
	D13	Flash data-read-protect bit for 0xf0000–0xf7ff	1	Readable	0	Protected	1	R/W	
	D12	Flash data-read-protect bit for 0xe8000–0xefff	1	Readable	0	Protected	1	R/W	
	D11	Flash data-read-protect bit for 0xe0000–0xe7ff	1	Readable	0	Protected	1	R/W	
	D10	Flash data-read-protect bit for 0xd8000–0xdfff	1	Readable	0	Protected	1	R/W	
	D9	Flash data-read-protect bit for 0xd0000–0xd7ff	1	Readable	0	Protected	1	R/W	
	D8	Flash data-read-protect bit for 0xc8000–0xcfff	1	Readable	0	Protected	1	R/W	
	D7	Flash data-read-protect bit for 0xc0000–0xc7ff	1	Readable	0	Protected	1	R/W	
	D6	Flash data-read-protect bit for 0xb8000–0xbfff	1	Readable	0	Protected	1	R/W	
	D5	Flash data-read-protect bit for 0xb0000–0xb7ff	1	Readable	0	Protected	1	R/W	
	D4	Flash data-read-protect bit for 0xa8000–0xffff	1	Readable	0	Protected	1	R/W	
	D3	Flash data-read-protect bit for 0xa0000–0xa7ff	1	Readable	0	Protected	1	R/W	
	D2	Flash data-read-protect bit for 0x98000–0x9fff	1	Readable	0	Protected	1	R/W	
	D1	Flash data-read-protect bit for 0x90000–0x97ff	1	Readable	0	Protected	1	R/W	
	D0	Flash data-read-protect bit for 0x88000–0x8fff	1	Readable	0	Protected	1	R/W	

- Notes:**
- Be sure not to locate the area with data-read protection into the .data and .rodata sections.
 - Be sure to set D0 of address 0x87ffe to 1. If it is set to 0, the program cannot be booted.
 - Do not put the programs or data on the protect bit areas.

3.2.4 Access Control for the Flash Controller

The S1C17706 on-chip Flash memory is accessed via the exclusive Flash controller. A MISC register is used to set the access condition for the Flash controller.

Setting number of read access cycles for the Flash controller

In order to read data from the Flash memory properly, set the appropriate number of read access cycles according to the CCLK frequency using the FLCYC[2:0]/MISC_FL register.

FLASHC/SRAMC Control Register (MISC_FL)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks	
FLASHC/ SRAMC Control Register (MISC_FL)	0x5320 (16 bits)	D15–13	–	reserved	–		–	–	0 when being read.	
		D12	SRRV5	SRAMC bit order reverse	1	Reverse	0	Normal	0	R/W
		D11–10	–	reserved	–		–	–	–	0 when being read.
		D9–8	SRCYC[1:0]	SRAMC access cycle	SRCYC[1:0]		Access cycle	0x0	R/W	
					0x3	5 cycles				
					0x2	4 cycles				
0x1	3 cycles									
0x0	2 cycles									
D7–3	–	reserved	–		–	–	–	0 when being read.		
D2–0	FLCYC[2:0]	FLASHC read access cycle	FLCYC[2:0]		Read cycle	0x4	R/W			
			0x7–0x5		reserved					
			0x4	1 cycle						
			0x3	5 cycles						
			0x2	4 cycles						
0x1	3 cycles									
0x0	2 cycles									

D[2:0] FLCYC[2:0]: FLASHC Read Access Cycle Bits

Sets the number of read access cycles for the Flash controller.

Table 3.2.4.1 Setting Read Access Cycles for the Flash Controller

FLCYC[2:0]	Number of read access cycles	CCLK frequency
0x7–0x5	Reserved	–
0x4	1 cycle	8.2 MHz max.
0x3	5 cycles	8.2 MHz max.
0x2	4 cycles	8.2 MHz max.
0x1	3 cycles	8.2 MHz max.
0x0	2 cycles	8.2 MHz max.

(Default: 0x4)

Note: Be sure to avoid setting a number of read access cycles that exceeds the maximum allowable CCLK frequency, as it may cause a malfunction.

3.3 Internal RAM Area

3.3.1 Internal RAM

The S1C17706 contains a RAM in the 12K-byte area from address 0x0 to address 0x2fff. The RAM is accessed in one cycle for reading/writing and allows high-speed execution of the instruction codes copied into it as well as storing variables and other data.

Note: The 64-byte area at the end of the RAM (0x2fc0–0x2fff) is reserved for the on-chip debugger. When using the debug functions under application development, do not access this area from the application program.

This area can be used for applications of mass-produced devices that do not need debugging.

The S1C17706 enables the RAM size used to apply restrictions to 12KB, 8KB, 4KB, 2KB, 1KB, or 512B. For example, when using the S1C17706 to develop an application for a built-in ROM model, you can set the RAM size to match that of the target model, preventing creating programs that seek to access areas outside the RAM areas of the target product. The RAM size is selected using IRAMSZ[1:0]/MISC_IRAMSZ register.

IRAM Size Select Register (MISC_IRAMSZ)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
IRAM Size Select Register (MISC_IRAMSZ)	0x5326 (16 bits)	D15–9	–	reserved	–	–	–	0 when being read.	
		D8	DBADR	Debug base address select	1 0x0	0 0xffc00	0	R/W	
		D7	–	reserved	–	–	–	–	0 when being read.
		D6–4	IRAMSZ_ACT	Actual IRAM size	–	0x0	0	R	
		D3	–	reserved	–	–	–	–	0 when being read.
		D2–0	IRAMSZ[2:0]	IRAM size select	–	IRAMSZ[2:0]	Size	0x0	R/W
				Other	reserved				
				0x5	512B				
				0x4	1KB				
				0x3	2KB				
				0x2	4KB				
				0x1	8KB				
				0x0	12KB				

D[2:0] IRAMSZ[2:0]: IRAM Size Select Bits

Selects the internal RAM size used.

Table 3.3.1.1 Selecting Internal RAM Size

IRAMSZ[2:0]	Internal RAM size
Other	reserved
0x5	512B
0x4	1KB
0x3	2KB
0x2	4KB
0x1	8KB
0x0	12KB

(Default: 0x0)

Note: The MISC_IRAMSZ register is write-protected. The write-protection must be overridden by writing 0x96 to the MISC_PROT register. Note that the MISC_PROT register should normally be set to a value other than 0x96, except when writing to the MISC_IRAMSZ register. Unnecessary programs may result in system malfunctions.

3.4 Display RAM Area

3.4.1 Display RAM

The display RAM is located in the 960-byte area from address 0x4800 to address 0x4fff for the on-chip LCD driver and in the 960-byte area from address 0x7800 to address 0x7fff for the gray-scale RAM. The display RAM is accessed in two to five cycles as an eight-bit device. It can be used as a general-purpose RAM when it is not used for display. See the “Display Memory” section in the “LCD Driver (LCD32A)” chapter for specific information on the display memory.

3.4.2 Access Control for the SRAM Controller

The S1C17706 display RAM is accessed via the exclusive SRAM controller. A MISC register is used to set the access condition for the SRAM controller.

Setting number of access cycles for the SRAM controller

In order to read/write data from/to the display RAM properly, set the appropriate number of access cycles according to the CCLK frequency using SRCYC[1:0]/MISC_FL register.

FLASHC/SRAMC Control Register (MISC_FL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
FLASHC/ SRAMC Control Register (MISC_FL)	0x5320 (16 bits)	D15-13	–	reserved	–	–	–	0 when being read.	
		D12	SRRVS	SRAMC bit order reverse	1 Reverse 0 Normal	0	R/W		
		D11-10	–	reserved	–	–	–	0 when being read.	
		D9-8	SRCYC[1:0]	SRAMC access cycle	SRCYC[1:0]	Access cycle	0x0	R/W	
					0x3	5 cycles			
					0x2	4 cycles			
0x1	3 cycles								
0x0	2 cycles								
D7-3	–	reserved	–	–	–	0 when being read.			
D2-0	FLCYC[2:0]	FLASHC read access cycle	FLCYC[2:0]	Read cycle	0x4	R/W			
			0x7-0x5	reserved					
			0x4	1 cycle					
			0x3	5 cycles					
			0x2	4 cycles					
0x1	3 cycles								
0x0	2 cycles								

D12 SRRVS: SRAMC Bit Order Reverse Bit

Reverses the bit order in byte data transferred between a CPU general-purpose register and the display RAM.

1 (R/W): Reverse (MSB ↔ LSB in byte units)

0 (R/W): Normal (default)

Data transfer when SRRVS = 1

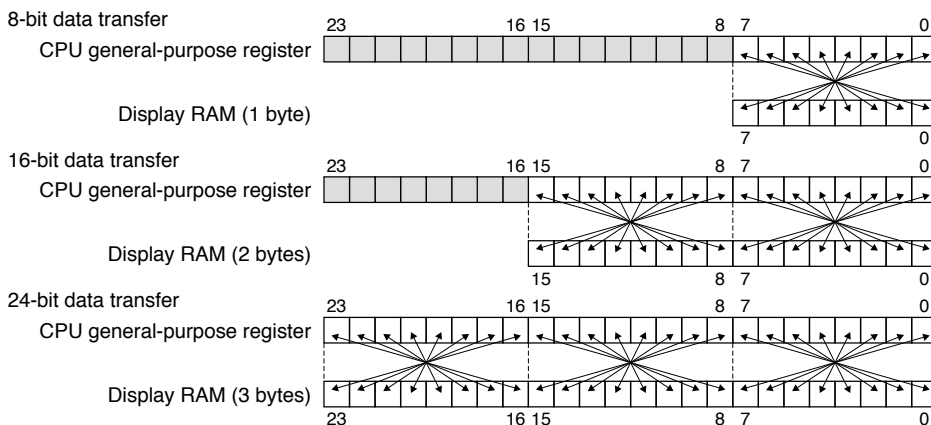


Figure 3.4.2.1 Data Transfer Between CPU General-Purpose Register and Display RAM (SRRVS = 1)

Data transfer when SRRVS = 0

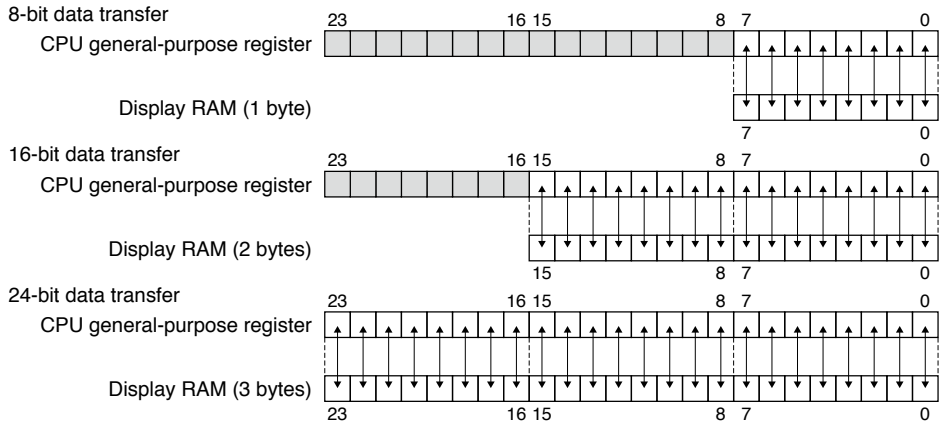


Figure 3.4.2.2 Data Transfer Between CPU General-Purpose Register and Display RAM (SRRVS = 0)

D[9:8] SRCYC[1:0]: SRAMC Access Cycle Bits

Sets the number of SRAM (display RAM) controller access cycle.

Table 3.4.2.1 Setting Access Cycles for the SRAM Controller

SRCYC[1:0]	Number of access cycles	CCLK frequency
0x3	5 cycles	8.2 MHz max.
0x2	4 cycles	8.2 MHz max.
0x1	3 cycles	8.2 MHz max.
0x0	2 cycles	8.2 MHz max.

(Default: 0x3)

Note: Be sure to avoid setting a number of read access cycles that exceeds the maximum allowable CCLK frequency, as it may cause a malfunction.

3.5 Internal Peripheral Area

The I/O and control registers for the internal peripheral modules are located in the 1K-byte area beginning with address 0x4000 and the 4K-byte area beginning with address 0x5000.

For details of each control register, see the I/O register list in Appendix or description for each peripheral module.

3.5.1 Internal Peripheral Area 1 (0x4000–)

The internal peripheral area 1 beginning with address 0x4000 contains the I/O memory for the peripheral functions listed below and this area can be accessed in one cycle.

- MISC register (MISC, 8-bit device)
- UART (UART, 8-bit device)
- 16-bit timers (T16, 16-bit device)
- Interrupt controller (ITC, 16-bit device)
- SPI (SPI, 16-bit device)
- I²C master (I2CM, 16-bit device)
- I²C slave (I2CS, 16-bit device)

3.5.2 Internal Peripheral Area 2 (0x5000–)

The internal peripheral area 2 beginning with address 0x5000 contains the I/O memory for the peripheral functions listed below and this area can be accessed in one cycle.

- Clock timer (CT, 8-bit device)
- Stopwatch timer (SWT, 8-bit device)
- Watchdog timer (WDT, 8-bit device)
- Clock generator (CLG, 8-bit device)
- LCD driver (LCD32A, 8-bit device)
- SVD circuit (SVD, 8-bit device)
- Power generator (VD1, 8-bit device)
- Real-time clock (RTC2, 8-bit device)
- Sound generator (SND, 8-bit device)
- I/O port & port MUX (P, 8-bit device)
- MISC register (MISC, 16-bit device)
- IR remote controller (REMC, 16-bit device)
- A/D converter (ADC10, 16-bit device)
- R/F converter (RFC, 16-bit device)
- 16-bit PWM timers (T16A2, 16-bit device)

3.6 S1C17 Core I/O Area

The 1K-byte area from address 0xffffc00 to address 0xfffffff is the I/O area for the CPU core in which the I/O registers listed in the table below are located.

Table 3.6.1 I/O Map (S1C17 Core I/O Area)

Peripheral	Address	Register name		Function
S1C17 Core I/O	0xffff84	IDIR	Processor ID Register	Indicates the processor ID.
	0xffff90	DBRAM	Debug RAM Base Register	Indicates the debug RAM base address.
	0xffffa0	DCR	Debug Control Register	Debug control
	0xffffb4	IBAR1	Instruction Break Address Register 1	Instruction break address #1 setting
	0xffffb8	IBAR2	Instruction Break Address Register 2	Instruction break address #2 setting
	0xffffbc	IBAR3	Instruction Break Address Register 3	Instruction break address #3 setting
	0xffffd0	IBAR4	Instruction Break Address Register 4	Instruction break address #4 setting

See “Processor Information” in the “CPU” chapter for more information on IDIR. See the “On-chip Debugger (DBG)” chapter for more information on other registers.

This area includes the S1C17 Core registers, in addition to those described above. For more information on these registers, refer to the “S1C17 Core Manual.”

4 Power Supply

4.1 Power Supply Voltage (V_{DD})

The operating voltage range of the S1C17706 is as follows:

For normal operation: $V_{DD} = 1.8 \text{ V to } 3.6 \text{ V}$ (Normal operating mode)

For Flash programming: $V_{DD} = 2.7 \text{ V to } 3.6 \text{ V}$ (Flash erase/programming mode 1)

$V_{DD} = 2.5 \text{ V to } 2.7 \text{ V}$ (Flash erase/programming mode 2)

Supply a voltage within the range to the V_{DD} pins with the V_{SS} pins as the GND level. The S1C17706 provides two or more V_{DD} and V_{SS} pins. Do not leave any power supply pins open and be sure to connect them to + power source and GND.

Note: Do not use Flash erase/programming modes 1 and 2 for normal operation that does not perform Flash erasing/programming.

4.2 Analog Power Supply Voltage (AV_{DD})

The analog power supply pin (AV_{DD}) is provided separately from the V_{DD} pin in order that the digital circuits do not affect the analog circuits (A/D converter). The AV_{DD} pin is used to supply an analog power voltage and the V_{SS} pin is used as the analog ground. The following voltage is enabled for AV_{DD} :

$AV_{DD} = V_{DD} = 1.8 \text{ V to } 3.6 \text{ V}$ ($V_{SS} = \text{GND}$)

Note: Be sure to supply the same voltage as V_{DD} to the AV_{DD} pin even if the analog circuit is not used.

Noise on the analog power lines decrease the A/D converting precision, so use a stabilized power supply and make the board pattern with consideration given to that.

4.3 Internal Power Supply Circuit

The S1C17706 has a built-in power supply circuit shown in Figure 4.3.1 to generate all the power voltages required for the internal circuits. The power supply module consists of three circuits.

Table 4.3.1 Power Supply Circuit

Circuit	Power supply circuit	Output voltage
Oscillator and internal logic circuits	Internal logic voltage regulator	V_{DD} or V_{D1}
LCD system voltage regulator	Power voltage booster	V_{DD} or V_{D2}
LCD driver	LCD system voltage regulator	V_{C1} to V_{C5}

Internal logic voltage regulator

The internal logic voltage regulator generates the V_{D1} operating voltage for the internal logic circuits and oscillators. The V_{D1} voltage value can be switched in the program; set it to 1.8 V for normal operation and 2.5 V for Flash programming.

Power voltage booster

The power voltage booster generates the V_{D2} operating voltage for the LCD system voltage regulator. Either V_{DD} or V_{D2} can be selected as the power source for the LCD system voltage regulator according to the V_{DD} supply voltage value.

Table 4.3.2 Power Source for LCD System Voltage Regulator

Power supply voltage V_{DD}	Power source for the LCD system voltage regulator
1.8 to 2.5 V	$V_{D2} (\cong V_{DD} \times 2)$
2.5 to 3.6 V	V_{DD}

LCD system voltage regulator

The LCD system voltage regulator generates the 1/5-bias LCD drive voltages V_{C1} , V_{C2} , V_{C3} , V_{C4} , and V_{C5} . In the S1C17706, the LCD drive voltage is supplied to the built-in LCD driver that drives the LCD panel connected to the SEG and COM pins.

Note: The V_{C1} to V_{C5} voltages cannot be obtained correctly if V_{DD} is used as the power source for the LCD system voltage regulator when V_{DD} is 2.5 V or less.

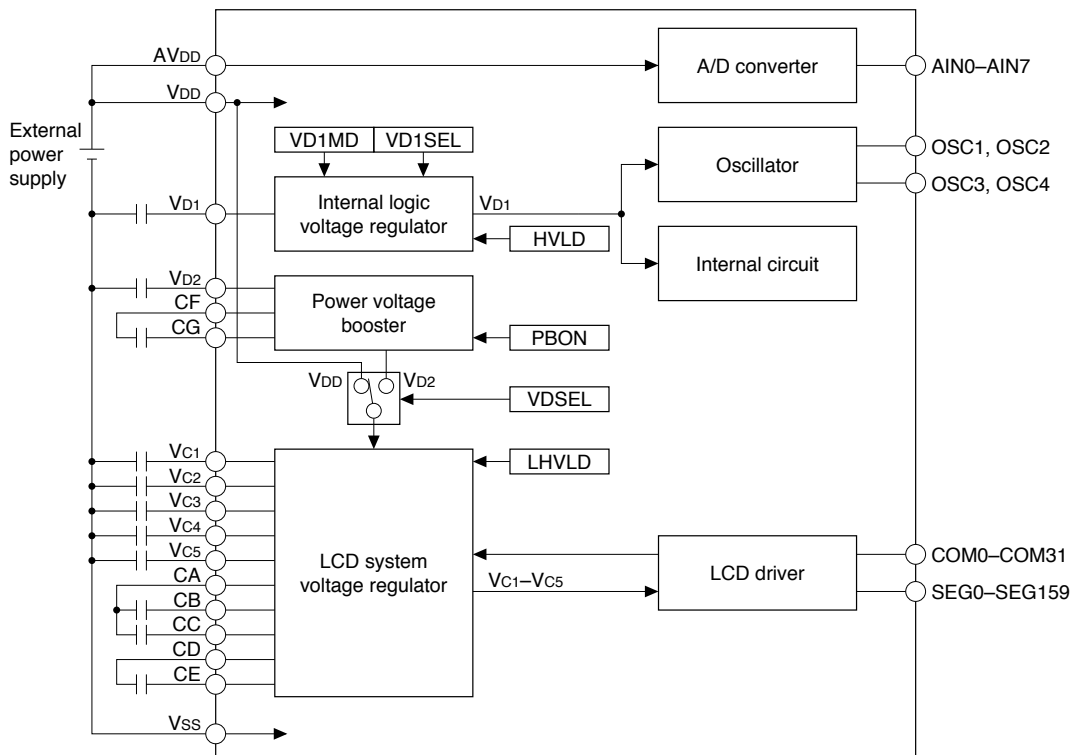


Figure 4.3.1 Configuration of Power Supply Circuit

Note: Be sure to avoid using the V_{D1} , V_{D2} , and V_{C1} – V_{C5} pin outputs to drive external circuits.

4.4 Controlling the Power Supply Circuit

In order to generate the internal operating voltage properly according to the power supply voltage and operating mode, or to reduce current consumption, the power supply circuit is designed to be controlled with software.

Switching the operating mode

The S1C17706 has three kinds of operating modes.

1. Normal operating mode

This mode is provided for running the application program.

$V_{DD} = 1.8$ to 3.6 V, internal operating voltage $V_{D1} = 1.8$ V

2. Flash erase/programming mode 1

This mode is provided for erasing and programming the Flash memory.

$V_{DD} = 2.7$ to 3.6 V, internal operating voltage $V_{D1} = 2.5$ V

3. Flash erase/programming mode 2

This mode is provided for erasing and programming the Flash memory using a voltage lower than that for Flash erase/programming mode 1.

$V_{DD} = 2.5$ to 2.7 V, internal operating voltage $V_{D1} = 2.5$ V

The V_{D1} voltage value must be switched according to the operating mode as shown above using VD1MD/VD1_CTL register. Normally set VD1MD to 0 ($V_{D1} = 1.8$ V, default setting). It should be set to 1 before erasing/programming the Flash memory when $V_{DD} = 2.7$ to 3.6 V.

Note: When the V_{D1} voltage is switched, the V_{D1} voltage requires 5 ms (max.) to stabilize. Flash memory programming should be started after the stabilization time has elapsed.

Furthermore, set VD1SEL/VD1_SEL register to 1 to erase/program the Flash memory when $V_{DD} = 2.5$ to 2.7 V. Note that the VD1_SEL register is write-protected to prevent unnecessary switching. The write-protection must be overridden by writing 0x96 to the MISC_PROT register before altering VD1SEL.

- Notes:**
- Make sure that V_{DD} is in the range from 2.5 V to 2.7 V before switching VD1SEL. Switching when V_{DD} is out of this range may cause damage to the IC or a malfunction.
 - Take at least 5 ms (max.) of interval before switching VD1SEL from 0 to 1 after setting VD1MD to 1.
 - When switching both VD1SEL and VD1MD from 1 to 0, first switch VD1SEL and then VD1MD.

Controlling the LCD power source

The LCD system voltage regulator must be driven with a 2.5 V or more power voltage to generate appropriate LCD drive voltages V_{C1} to V_{C5} . When the power supply voltage (V_{DD}) is within the range from 1.8 V to 2.5 V, use the power voltage booster to generate double the V_{DD} voltage and drive the LCD system voltage regulator with the V_{D2} output voltage. Set the PBON/LCD_PWR register to 1 to turn the power voltage booster on. In addition, set the VDSEL/LCD_PWR register to 1 to drive the LCD system voltage regulator with the V_{D2} voltage output from the power voltage booster. PBON must be set to 1 before the drive voltage can be switched to V_{D2} . When the power supply voltage (V_{DD}) is 2.5 V or more, drive the LCD system voltage regulator with V_{DD} . The power voltage booster should be turned off to reduce current consumption. In this case, set both PBON and VDSEL to 0 (default).

Note: When the power voltage booster is turned on, the V_{D2} output voltage requires about 1 ms to stabilize. Do not switch the power source for the LCD system voltage regulator to V_{D2} until the stabilization time has elapsed.

The LCD drive voltages V_{C1} to V_{C5} will be supplied to the LCD driver by setting the DSPC[1:0]/LCD_DCTL register to a value other than 0x0 (display off).

When the internal LCD driver is not used, the power voltage booster and LCD system voltage regulator should be turned off to reduce current consumption. Set PBON, VDSEL, and DSPC[1:0] to 0 (default).

Power control bit settings

Table 4.4.1 lists the power control bit settings in different operating conditions.

Table 4.4.1 Power Control Bit Settings

Operating mode	Condition		Control bits				
	V_{DD}	LCD driver	VD1SEL	VD1MD	PBON	VDSEL	DSPC[1:0]
Normal operating mode	1.8 to 2.5 V	Used	0	0	1	1	Other than 0x0
	2.5 to 3.6 V	Used	0	0	0	0	Other than 0x0
	1.8 to 3.6 V	Not used	0	0	0	0	0x0
Flash erase/programming mode 1	1.8 to 2.7 V	–	(Not supported)				
	2.7 to 3.6 V	Used	0	1	0	0	Other than 0x0
		Not used	0	1	0	0	0x0
Flash erase/programming mode 2	1.8 to 2.5 V	–	(Not supported)				
	2.5 to 2.7 V	Used	1	1	0	0	Other than 0x0
		Not used	1	1	0	0	0x0
	2.7 to 3.6 V	–	(Not supported)				

For the DSPC[1:0] settings, see “LCD Display Control Register (LCD_DCTL)” in the “LCD Driver (LCD32A)” chapter.

4.5 Heavy Load Protection Function

In order to ensure a stable circuit behavior and LCD display quality even if the power supply voltage fluctuates due to driving an external load, the internal logic voltage regulator and the LCD system voltage regulator have a heavy load protection function.

The internal logic voltage regulator enters heavy load protection mode by writing 1 to the HVLD/VD1_CTL register and it ensures stable V_{D1} output.

V_{D1} may become unstable in the operations shown below and in other conditions. If the IC operations are unstable due to these conditions during evaluation, set the internal logic voltage regulator to heavy load protection mode before starting the operations.

- When driving a diode or buzzer in which a large current flows using a port output (Maintain the regulator in heavy load protection mode while the port is driving the load.)
- When switching the system clock from the high-speed clock to the low-speed clock and vice versa (Set the regulator in heavy load protection mode immediately before switching the clock and maintain it for several 10 μ s after the switching has completed.)
- When placing/releasing the system into/from HALT/SLEEP mode at frequent intervals (Maintain the regulator in heavy load protection mode while the processing is being repeated.)

Note: Release the heavy load protection function after the unstable operations finished. In addition, if the unstable operations occur frequently, set the heavy load protection function to enable during these operations.

The LCD system voltage regulator enters heavy load protection mode by writing 1 to the LHVLD/LCD_VREG register and it ensures stable V_{C1} – V_{C5} outputs. Use the heavy load protection function when the LCD display has inconsistencies in density.

Note: Current consumption increases in heavy load protection mode, therefore do not set heavy load protection mode with software if unnecessary.

4.6 Control Register Details

Table 4.6.1 List of Power Control Registers

Address	Register name		Function
0x5120	VD1_CTL	VD1 Control Register	Controls the V_{D1} voltage and heavy load protection mode.
0x5122	VD1_SEL	VD1 Select Register	Selects the V_{D1} regulator output level.
0x50a3	LCD_VREG	LCD Voltage Regulator Control Register	Controls the LCD drive voltage regulator.
0x50a4	LCD_PWR	LCD Power Voltage Booster Control Register	Controls the LCD voltage booster.

The power control registers are described in detail below. These are all 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

VD1 Control Register (VD1_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
VD1 Control Register (VD1_CTL)	0x5120 (8 bits)	D7–6	–	reserved	–	–	–	0 when being read.
		D5	HVLD	V_{D1} heavy load protection mode	1 On 0 Off	0	R/W	
		D4–1	–	reserved	–	–	–	0 when being read.
		D0	VD1MD	Flash erase/programming mode	1 Flash (2.5 V) 0 Norm.(1.8 V)	0	R/W	

D[7:6] Reserved

D5 HVLD: V_{D1} Heavy Load Protection Mode Bit

Sets the internal logic voltage regulator into heavy load protection mode.

1 (R/W): Heavy load protection On

0 (R/W): Heavy load protection Off (default)

The internal logic voltage regulator enters heavy load protection mode by writing 1 to HVLD and it ensures stable V_{D1} output.

Current consumption increases in heavy load protection mode, therefore do not set if unnecessary.

D[4:1] Reserved

D0 VD1MD: Flash Erase/Programming Mode Bit

Selects the V_{D1} internal operating voltage value (operating mode).

1 (R/W): $V_{D1} = 2.5$ V, Flash erase/programming mode

0 (R/W): $V_{D1} = 1.8$ V, Normal operating mode (default)

Normally set VD1MD to 0 ($V_{D1} = 1.8$ V, default setting). It should be set to 1 before erasing/programming the Flash memory when V_{DD} is 2.5 V or more.

Note: When the V_{D1} voltage is switched, the V_{D1} voltage requires 5 ms (max.) to stabilize. Flash memory programming should be started after the stabilization time has elapsed.

VD1 Select Register (VD1_SEL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
VD1 Select Register (VD1_SEL)	0x5122 (8 bits)	D7-1	–	reserved	–	–	–	0 when being read.
		D0	VD1SEL	VD1 regulator output level select	1 V _{DD} level 0 Normal level	0	R/W	

Note: The VD1_SEL register is write-protected. To program the VD1_SEL register, write-protection must be overridden by writing 0x96 to the MISC_PROT register. Normally, the MISC_PROT register should be set to a value other than 0x96, except when writing to the VD1_SEL register, since unnecessary programs may result in system malfunctions.

D[7:1] Reserved

D0 VD1SEL: VD1 Regulator Output Level Select Bit

Sets the internal logic voltage regulator output level.

1 (R/W): V_{DD} level (Flash erase/programming mode 2)

0 (R/W): Normal level (default)

VD1SEL should be set to 1 only when erasing/programming the Flash memory with V_{DD} from 2.5 to 2.7 V. VD1SEL must be set to 0 in other operating modes.

- Notes:**
- Make sure that V_{DD} is in the range from 2.5 V to 2.7 V before switching VD1SEL. Switching when V_{DD} is out of this range may cause damage to the IC or a malfunction.
 - Take at least 5 ms (max.) of interval before switching VD1SEL from 0 to 1 after setting VD1MD to 1.
 - When switching both VD1SEL and VD1MD from 1 to 0, first switch VD1SEL and then VD1MD.

LCD Voltage Regulator Control Register (LCD_VREG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
LCD Voltage Regulator Control Register (LCD_VREG)	0x50a3 (8 bits)	D7-5	–	reserved	–	–	–	0 when being read.
		D4	LHVLD	LCD heavy load protection mode	1 On 0 Off	0	R/W	
		D3-0	–	reserved	–	–	–	–

D[7:5] Reserved

D4 LHVLD: LCD Heavy Load Protection Mode Bit

Sets the LCD system voltage regulator into heavy load protection mode.

1 (R/W): Heavy load protection On

0 (R/W): Heavy load protection Off (default)

The LCD system voltage regulator enters heavy load protection mode by writing 1 to LHVLD and it ensures stable V_{C1} – V_{C5} outputs. Use the heavy load protection function when the LCD display has inconsistencies in density. Current consumption increases in heavy load protection mode, therefore do not set if unnecessary.

D[3:0] Reserved

LCD Power Voltage Booster Control Register (LCD_PWR)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks	
LCD Power Voltage Booster Control Register (LCD_PWR)	0x50a4 (8 bits)	D7-2	--	reserved	--		--	--	0 when being read.	
		D1	VDSEL	Regulator power source select	1	V _{D2}	0	V _{DD}	0	R/W
		D0	PBON	Power voltage booster control	1	On	0	Off	0	R/W

D[7:2] Reserved

D1 VDSEL: Regulator Power Source Select Bit

Selects the power source voltage for the LCD system voltage regulator.

1 (R/W): V_{D2}

0 (R/W): V_{DD} (default)

When the power supply voltage (V_{DD}) is within the range from 1.8 V to 2.5 V, write 1 to VDSEL to drive the LCD system voltage regulator with the V_{D2} voltage output from the power voltage booster. Before this setting though, write 1 to PBON to turn the power voltage booster on.

When the power supply voltage (V_{DD}) is 2.5 V or more, write 0 to VDSEL to drive the LCD system voltage regulator with V_{DD}. In this case, the power voltage booster should be turned off to reduce current consumption.

D0 PBON: Power Voltage Booster Control Bit

Controls the power voltage booster.

1 (R/W): On

0 (R/W): Off (default)

When the power supply voltage (V_{DD}) is within the range from 1.8 V to 2.5 V, write 1 to PBON to turn the power voltage booster on. The power voltage booster doubles the V_{DD} voltage to generate V_{D2} for driving the LCD system voltage regulator. In addition, set VDSEL to 1 to drive the LCD system voltage regulator with V_{D2}. It is not necessary to generate V_{D2} when the power supply voltage (V_{DD}) is 2.5 V or more. In this case, the power voltage booster should be turned off to reduce current consumption.

Note: When the power voltage booster is turned on, the V_{D2} output voltage requires about 1 ms to stabilize. Do not switch the power source for the LCD system voltage regulator to V_{D2} until the stabilization time has elapsed.

5 Initial Reset

5.1 Initial Reset Sources

The S1C17706 has four initial reset sources that initialize the internal circuits.

- (1) #RESET pin (external initial reset)
- (2) Key-entry reset using the P0 ports (P00–P03 pins) (software selectable external initial reset)
- (3) Watchdog timer (software selectable internal initial reset)
- (4) Supply voltage detector (software selectable internal initial reset)

Figure 5.1.1 shows the configuration of the initial reset circuit.

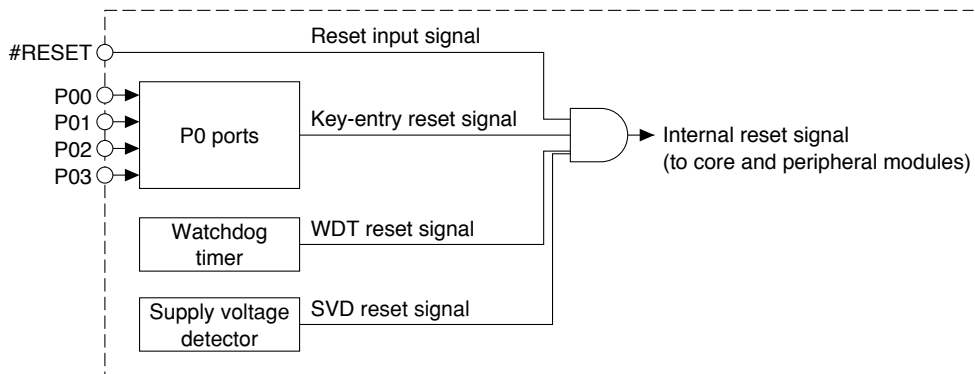


Figure 5.1.1 Configuration of Initial Reset Circuit

The CPU and peripheral circuits are initialized by the active signal from an initial reset source. When the reset signal is negated, the CPU starts reset handling. The reset handling reads the reset vector (reset handler start address) from the beginning of the vector table and starts executing the program (initial routine) beginning with the read address.

5.1.1 #RESET Pin

By setting the #RESET pin to low level, the S1C17706 enters initial reset state. In order to initialize the S1C17706 for sure, the #RESET pin must be held at low for more than the prescribed time (see “AC Characteristics” in the “Electrical Characteristics” chapter) after the power supply voltage is supplied.

Initial reset state is canceled when the #RESET pin at low level is set to high level and the CPU starts executing the reset interrupt handler.

The #RESET pin is equipped with a pull-up resistor.

5.1.2 P0 Port Key-Entry Reset

Entering low level simultaneously to the ports (P00–P03) selected with software triggers an initial reset. For details of the key-entry reset function, see the “I/O Ports (P)” chapter.

Note: The P0 port key-entry reset function cannot be used for power-on reset as it must be enabled with software.

5.1.3 Resetting by the Watchdog Timer

The S1C17706 has a built-in watchdog timer to detect runaway of the CPU. The watchdog timer overflows if it is not reset with software (due to CPU runaway) in the setting time. The overflow signal can generate either NMI or reset. Write 1 to the WDTMD/WDT_ST register to generate reset (NMI occurs when WDTMD = 0).

For details of the watchdog timer, see the “Watchdog Timer (WDT)” chapter.

- Notes:**
- When using the reset function of the watchdog timer, program the watchdog timer so that it will be reset within the setting time to avoid occurrence of an unnecessary reset.
 - The reset function of the watchdog timer cannot be used for power-on reset as it must be enabled with software.

5.1.4 Resetting by the Supply Voltage Detector

The S1C17706 detects the power supply voltage drop and includes the circuit generating resets. For details of the supply voltage detector, see the “Supply Voltage Detector (SVD)” chapter.

- Notes:**
- The reset function of the supply voltage detector cannot be used for power-on reset as it must be enabled with software.
 - When a reset is generated by the supply voltage detector, the control registers of the supply voltage detector will not be initialized. The other resets initialize these registers.

5.2 Initial Reset Sequence

Even if the #RESET pin input negates the reset signal after power is turned on, the CPU cannot boot up until the oscillation stabilization waiting time (64 / IOSC clock frequency) has elapsed.

Figure 5.2.1 shows the operating sequence following cancellation of initial reset.

The CPU starts operating in synchronization with the IOSC (internal CR oscillator) clock after reset state is canceled.

- Note:** The oscillation stabilization time described in this section does not include oscillation start time. Therefore the time interval until the CPU starts executing instructions after power is turned on or SLEEP mode is canceled may be longer than that indicated in the figure below.

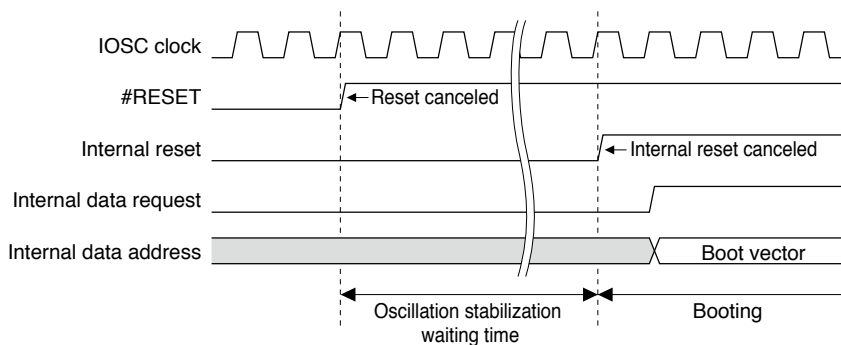


Figure 5.2.1 Operation Sequence Following Cancellation of Initial Reset

5.3 Initial Settings After an Initial Reset

The CPU internal registers are initialized as follows at initial reset.

R0–R7: 0x0

PSR: 0x0 (interrupt level = 0, interrupt disabled)

SP: 0x0

PC: Reset vector stored at the beginning of the vector table is loaded by the reset handling.

The internal RAM and display memory should be initialized with software as they are not initialized at initial reset. The internal peripheral modules are initialized to the default values (except some undefined registers). Change the settings with software if necessary. For the default values set at initial reset, see the list of I/O registers in Appendix or descriptions for each peripheral module.

6 Interrupt Controller (ITC)

6.1 ITC Module Overview

The interrupt controller (ITC) honors interrupt requests from the peripheral modules and outputs the interrupt request, interrupt level and vector number signals to the S1C17 Core according to the priority and interrupt levels. The features of the ITC module are listed below.

- Supports 23 maskable interrupt systems (for 27 interrupt sources listed below).
 1. P00–P07 input interrupt (8 types)
 2. P10–P17 input interrupt (8 types)
 3. P20–P27 input interrupt (8 types)
 4. P30–P37 input interrupt (8 types)
 5. Stopwatch timer interrupt (3 types)
 6. Clock timer interrupt (4 types)
 7. Real-time clock interrupt (6 types)
 8. SVD interrupt (1 type)
 9. LCD interrupt (1 type)
 10. 16-bit PWM timer Ch.0 interrupt (6 types)
 11. 16-bit PWM timer Ch.1 interrupt (6 types)
 12. 16-bit PWM timer Ch.2 interrupt (6 types)
 13. 16-bit PWM timer Ch.3 interrupt (6 types)
 14. 16-bit timer Ch.0 & Ch.4 interrupt (2 types)
 15. 16-bit timer Ch.1 interrupt (1 type)
 16. 16-bit timer Ch.2 interrupt (1 type)
 17. 16-bit timer Ch.3 interrupt (1 type)
 18. UART Ch.0 interrupt (4 types)
 19. UART Ch.1 interrupt (4 types)
 20. IR remote controller interrupt (3 types)
 21. SPI Ch.0 interrupt (2 types)
 22. SPI Ch.1 interrupt (2 types)
 23. SPI Ch.2 interrupt (2 types)
 24. I²C master interrupt (2 types)
 25. I²C slave interrupt (3 types)
 26. A/D converter interrupt (2 types)
 27. R/F converter interrupt (5 types)
- Supports eight interrupt levels to prioritize the interrupt sources.

The ITC enables the interrupt level (priority) for determining the processing sequence when multiple interrupts occur simultaneously to be set for each interrupt system separately.

Each interrupt system includes the number of interrupt causes indicated in parentheses above. Settings to enable or disable interrupt for different causes are set by the respective peripheral module registers.

For specific information on interrupt causes and their control, refer to the peripheral module explanations.

Figure 6.1.1 shows the structure of the interrupt system.

6 INTERRUPT CONTROLLER (ITC)

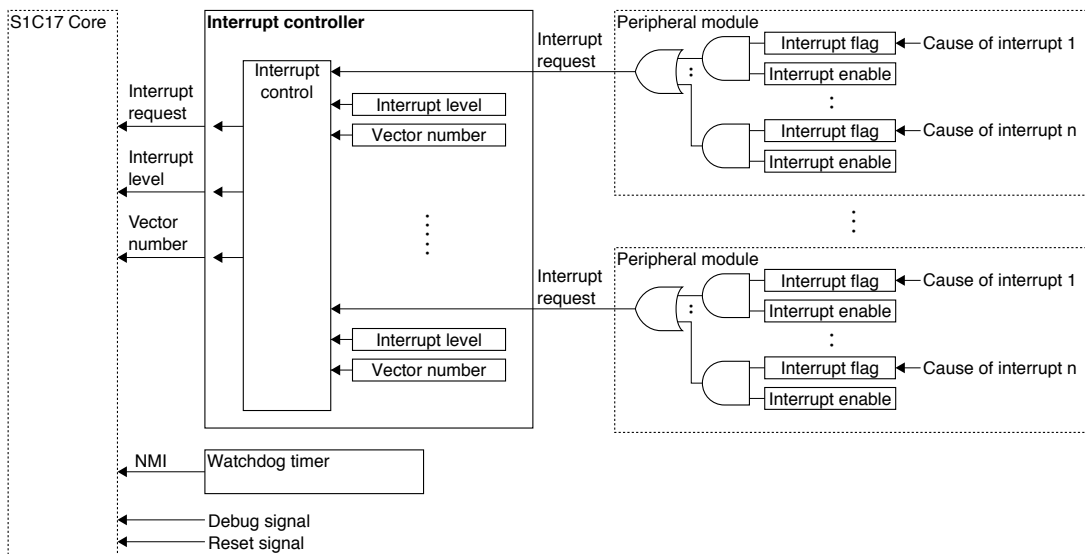


Figure 6.1.1 Interrupt System

6.2 Vector Table

The vector table contains the vectors to the interrupt handler routines (handler routine start address) that will be read by the S1C17 Core to execute the handler when an interrupt occurs.

Table 6.2.1 shows the vector table of the S1C17706.

Table 6.2.1 Vector Table

Vector No. Software interrupt No.	Vector address	Hardware interrupt name	Cause of hardware interrupt	Priority
0 (0x00)	TTBR + 0x00	Reset	<ul style="list-style-type: none"> Low input to the #RESET pin Watchdog timer overflow *2 	1
1 (0x01)	TTBR + 0x04	Address misaligned interrupt	Memory access instruction	2
-	(0xffc00)	Debugging interrupt	bx:k instruction, etc.	3
2 (0x02)	TTBR + 0x08	NMI	Watchdog timer overflow *2	4
3 (0x03)	TTBR + 0x0c	Reserved for C compiler	-	-
4 (0x04)	TTBR + 0x10	P0 port interrupt	P00-P07 port inputs	High *1 ↑
5 (0x05)	TTBR + 0x14	P1 port interrupt	P10-P17 port inputs	
6 (0x06)	TTBR + 0x18	Stopwatch timer interrupt	<ul style="list-style-type: none"> 100 Hz timer signal 10 Hz timer signal 1 Hz timer signal 	
7 (0x07)	TTBR + 0x1c	Clock timer interrupt	<ul style="list-style-type: none"> 32 Hz timer signal 8 Hz timer signal 2 Hz timer signal 1 Hz timer signal 	
		Real-time clock interrupt	1/32-second, 1/8-second, 1-second, 1-minute, 1-hour, or 1-day count-up	
8 (0x08)	TTBR + 0x20	16-bit PWM timer Ch.2 interrupt	<ul style="list-style-type: none"> Compare A/B Capture A/B Capture A/B overwrite 	
9 (0x09)	TTBR + 0x24	SVD interrupt	Low supply voltage detected	
10 (0x0a)	TTBR + 0x28	LCD interrupt	Frame signal	
		SPI Ch.2 interrupt	<ul style="list-style-type: none"> Transmit buffer empty Receive buffer full 	
11 (0x0b)	TTBR + 0x2c	16-bit PWM timer Ch.0 interrupt	<ul style="list-style-type: none"> Compare A/B Capture A/B Capture A/B overwrite 	
12 (0x0c)	TTBR + 0x30	16-bit timer Ch.0 and Ch.4 interrupt	<ul style="list-style-type: none"> Ch.0 underflow Ch.4 underflow 	
13 (0x0d)	TTBR + 0x34	16-bit timer Ch. 1 interrupt	Timer underflow	
14 (0x0e)	TTBR + 0x38	16-bit timer Ch. 2 interrupt	Timer underflow	

Vector No. Software interrupt No.	Vector address	Hardware interrupt name	Cause of hardware interrupt	Priority
15 (0x0f)	TTBR + 0x3c	16-bit timer Ch. 3 interrupt	Timer underflow	
		16-bit PWM timer Ch.3 interrupt	<ul style="list-style-type: none"> • Compare A/B • Capture A/B • Capture A/B overwrite 	
16 (0x10)	TTBR + 0x40	UART Ch.0 interrupt	<ul style="list-style-type: none"> • Transmit buffer empty • End of transmission • Receive buffer full • Receive error 	↓ Low *1
17 (0x11)	TTBR + 0x44	UART Ch.1 interrupt	<ul style="list-style-type: none"> • Transmit buffer empty • End of transmission • Receive buffer full • Receive error 	
18 (0x12)	TTBR + 0x48	SPI Ch.0 interrupt	<ul style="list-style-type: none"> • Transmit buffer empty • Receive buffer full 	
19 (0x13)	TTBR + 0x4c	I ² C Master interrupt	<ul style="list-style-type: none"> • Transmit buffer empty • Receive buffer full 	
20 (0x14)	TTBR + 0x50	IR remote controller interrupt	<ul style="list-style-type: none"> • Data length counter underflow • Input rising edge detected • Input falling edge detected 	
		SPI Ch.1 interrupt	<ul style="list-style-type: none"> • Transmit buffer empty • Receive buffer full 	
21 (0x15)	TTBR + 0x54	16-bit PWM timer Ch.1 interrupt	<ul style="list-style-type: none"> • Compare A/B • Capture A/B • Capture A/B overwrite 	
22 (0x16)	TTBR + 0x58	A/D converter interrupt	<ul style="list-style-type: none"> • Conversion completion • Conversion result overwrite 	
23 (0x17)	TTBR + 0x5c	R/F converter interrupt	<ul style="list-style-type: none"> • Reference oscillation completion • Sensor A oscillation completion • Sensor B oscillation completion • Time base counter overflow error • Measurement counter overflow error 	
24 (0x18)	TTBR + 0x60	P2 port interrupt	P20–P27 port inputs	
25 (0x19)	TTBR + 0x64	P3 port interrupt	P30–P37 port inputs	
26 (0x1a)	TTBR + 0x68	I ² C Slave interrupt	<ul style="list-style-type: none"> • Transmit buffer empty • Receive buffer full • Bus status 	
27 (0x1b)	TTBR + 0x6c	reserved	–	
:	:	:	:	
31 (0x1f)	TTBR + 0x7c	reserved	–	

*1 When the same interrupt level is set

*2 Either reset or NMI can be selected as the watchdog timer interrupt with software.

Vector numbers 4 to 26 are assigned to the maskable interrupts supported by the S1C17706.

Interrupts that share an interrupt vector

Interrupt vector numbers 7, 10, 15, and 20 are shared with two different interrupt modules.

Interrupt vector 7: Clock timer and real-time clock

Interrupt vector 10: LCD driver and SPI Ch.2

Interrupt vector 15: 16-bit timer Ch.3 and 16-bit PWM timer Ch.3

Interrupt vector 20: IR remote controller and SPI Ch.1

The interrupt signals from the two modules are input to the ITC through an OR gate. When using the two interrupts, check if which interrupt has occurred by reading the interrupt flags in both modules.

The two modules cannot be set to different interrupt level, as they use the same interrupt vector.

Vector table base address

The S1C17706 allows the base (starting) address of the vector table to be set using the MISC_TTBRL and MISC_TTBRH registers. “TTBR” described in Table 6.2.1 means the value set to these registers. After an initial reset, the MISC_TTBRL and MISC_TTBRH registers are set to 0x8000. Therefore, even when the vector table location is changed, it is necessary that at least the reset vector be written to the above address. Bits 7 to 0 in the MISC_TTBRL register are fixed at 0, so the vector table starting address always begins with a 256-byte boundary address.

Vector Table Address Low/High Registers (MISC_TTBRL, MISC_TTBRH)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Vector Table Address Low Register (MISC_TTBRL)	0x5328 (16 bits)	D15–8	TTBR[15:8]	Vector table base address A[15:8]	0x0–0xff	0x80	R/W	
		D7–0	TTBR[7:0]	Vector table base address A[7:0] (fixed at 0)	0x0	0x0	R	
Vector Table Address High Register (MISC_TTBRH)	0x532a (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.
		D7–0	TTBR[23:16]	Vector table base address A[23:16]	0x0–0xff	0x0	R/W	

Note: The MISC_TTBRL and MISC_TTBRH registers are write-protected. Before these registers can be rewritten, write protection must be removed by writing data 0x96 to the MISC_PROT register. Note that since unnecessary rewrites to the MISC_TTBRL and MISC_TTBRH registers could lead to erratic system operation, the MISC_PROT register should be set to other than 0x96 unless the Vector Table Base Registers must be rewritten.

6.3 Control of Maskable Interrupts

6.3.1 Interrupt Control Bits in Peripheral Modules

The peripheral module that generates interrupts includes an interrupt enable bit and an interrupt flag for each interrupt cause. The interrupt flag is set to 1 when the cause of interrupt occurs. By setting the interrupt enable bit to 1 (interrupt enabled), the flag state will be sent to the ITC as an interrupt request signal, generating an interrupt request to the S1C17 Core.

The corresponding interrupt enable bits should be set to 0 for those causes for which interrupts are not desired. In this case, although the interrupt flag is set to 1 if the interrupt cause occurs, the interrupt request signal sent to the ITC will not be asserted.

For specific information on causes of interrupts, interrupt flags, and interrupt enable bits, refer to the respective peripheral module descriptions.

Note: To prevent recurrence of the interrupt due to the same cause of interrupt, always reset the interrupt flag in the peripheral module before enabling the interrupt, resetting the PSR, or executing the `reti` instruction.

6.3.2 ITC Interrupt Request Processing

On receiving an interrupt signal from a peripheral module, the ITC sends the interrupt request, interrupt level, and vector number signals to the S1C17 Core.

Vector numbers are determined by the ITC internal hardware for each interrupt cause, as shown in Table 6.2.1.

The interrupt level is a value used by the S1C17 Core to compare with the IL bits (PSR). This interrupt level is used in the S1C17 Core to disable subsequently occurring interrupts with the same or lower level. (See Section 6.3.3.)

The default ITC settings are level 0 for all maskable interrupts. Interrupt requests are not accepted by the S1C17 Core if the level is 0.

The ITC includes control bits for selecting the interrupt level, and the level can be set to between 0 (low) and 7 (high) interrupt levels for each interrupt type.

If interrupt requests are input to the ITC simultaneously from two or more peripheral modules, the ITC outputs the interrupt request with the highest priority to the S1C17 Core in accordance with the following conditions.

1. The interrupt with the highest interrupt level takes precedence.
2. If multiple interrupt requests are input with the same interrupt level, the interrupt with the lowest vector number takes precedence.

The other interrupts occurring at the same time are held until all interrupts with higher priority levels have been accepted by the S1C17 Core.

If an interrupt cause with higher priority occurs while the ITC is outputting an interrupt request signal to the S1C17 Core (before being accepted by the S1C17 Core), the ITC alters the vector number and interrupt level signals to the setting information on the more recent interrupt. The previously occurring interrupt is held. The held interrupt is canceled and no interrupt is generated if the interrupt flag in the peripheral module is reset with software.

Table 6.3.2.1 Interrupt Level Setting Bits

Hardware interrupt	Interrupt level setting bits	Register address
P0 port interrupt	ILV0[2:0] (D[2:0]/ITC_LV0 register)	0x4306
P1 port interrupt	ILV1[2:0] (D[10:8]/ITC_LV0 register)	0x4306
Stopwatch timer interrupt	ILV2[2:0] (D[2:0]/ITC_LV1 register)	0x4308
Clock timer interrupt / Real-time clock interrupt	ILV3[2:0] (D[10:8]/ITC_LV1 register)	0x4308
16-bit PWM timer Ch.2 interrupt	ILV4[2:0] (D[2:0]/ITC_LV2 register)	0x430a
SVD interrupt	ILV5[2:0] (D[10:8]/ITC_LV2 register)	0x430a
LCD interrupt / SPI Ch.2 interrupt	ILV6[2:0] (D[2:0]/ITC_LV3 register)	0x430c
16-bit PWM timer Ch.0 interrupt	ILV7[2:0] (D[10:8]/ITC_LV3 register)	0x430c
16-bit timer Ch.0 & Ch.4 interrupt	ILV8[2:0] (D[2:0]/ITC_LV4 register)	0x430e
16-bit timer Ch.1 interrupt	ILV9[2:0] (D[10:8]/ITC_LV4 register)	0x430e
16-bit timer Ch.2 interrupt	ILV10[2:0] (D[2:0]/ITC_LV5 register)	0x4310
16-bit timer Ch.3 interrupt / 16-bit PWM timer Ch.3 interrupt	ILV11[2:0] (D[10:8]/ITC_LV5 register)	0x4310
UART Ch.0 interrupt	ILV12[2:0] (D[2:0]/ITC_LV6 register)	0x4312
UART Ch.1 interrupt	ILV13[2:0] (D[10:8]/ITC_LV6 register)	0x4312
SPI Ch.0 interrupt	ILV14[2:0] (D[2:0]/ITC_LV7 register)	0x4314
I ² C master interrupt	ILV15[2:0] (D[10:8]/ITC_LV7 register)	0x4314
IR remote controller interrupt / SPI Ch.1 interrupt	ILV16[2:0] (D[2:0]/ITC_LV8 register)	0x4316
16-bit PWM timer Ch.1 interrupt	ILV17[2:0] (D[10:8]/ITC_LV8 register)	0x4316
A/D converter interrupt	ILV18[2:0] (D[2:0]/ITC_LV9 register)	0x4318
R/F converter interrupt	ILV19[2:0] (D[10:8]/ITC_LV9 register)	0x4318
P2 port interrupt	ILV20[2:0] (D[2:0]/ITC_LV10 register)	0x431a
P3 port interrupt	ILV21[2:0] (D[10:8]/ITC_LV10 register)	0x431a
I ² C slave interrupt	ILV22[2:0] (D[2:0]/ITC_LV11 register)	0x431c

6.3.3 Interrupt Processing by the S1C17 Core

A maskable interrupt to the S1C17 Core occurs when all of the following conditions are met:

- The interrupt is enabled by the interrupt control bit inside the peripheral module.
- The IE (Interrupt Enable) bit of the PSR (Processor Status Register) in the S1C17 Core has been set to 1.
- The cause of interrupt that has occurred has a higher interrupt level than the value set in the IL field of the PSR.
- No other cause of interrupt having higher priority, such as NMI, has occurred.

If an interrupt cause that has been enabled in the peripheral module occurs, the corresponding interrupt flag is set to 1, and this state is maintained until it is reset by the program. This means that the interrupt cause is not cleared even if the conditions listed above are not met when the interrupt cause occurs. An interrupt occurs if the above conditions are met.

If multiple maskable interrupt causes occurs simultaneously, the interrupt cause with the highest interrupt level and lowest vector number becomes the subject of the interrupt request to the S1C17 Core. Interrupts with lower levels are held until the above conditions are subsequently met.

The S1C17 Core samples interrupt requests for each cycle. On accepting an interrupt request, the S1C17 Core switches to interrupt processing immediately after execution of the current instruction has been completed.

Interrupt processing involves the following steps:

- (1) The PSR and current program counter (PC) values are saved to the stack.
- (2) The PSR IE bit is reset to 0 (disabling subsequent maskable interrupts).
- (3) The PSR IL bits are set to the received interrupt level. (The NMI does not affect the IL bits.)
- (4) The vector for the interrupt occurred is loaded to the PC to execute the interrupt handler routine.

When an interrupt is accepted, (2) prevents subsequent maskable interrupts. Setting the IE bit to 1 in the interrupt handler routine allows handling of multiple interrupts. In this case, since IL is changed by (3), only an interrupt with a higher level than that of the currently processed interrupt will be accepted.

Ending interrupt handler routines using the `reti` instruction returns the PSR to the state before the interrupt has occurred. The program resumes processing following the instruction being executed at the time the interrupt occurred.

6.4 NMI

In the S1C17706, the watchdog timer can generate a non-maskable interrupt (NMI). The vector number for NMI is 2, with the vector address set to the vector table's starting address + 8 bytes.

This interrupt takes precedence over other interrupts and is unconditionally accepted by the S1C17 Core.

For detailed information on generating NMI, see the “Watchdog Timer (WDT)” chapter.

6.5 Software Interrupts

The S1C17 Core provides the “`int imm5`” and “`intl imm5, imm3`” instructions allowing the software to generate any interrupts. The operand `imm5` specifies a vector number (0–31) in the vector table. In addition to this, the `intl` instruction has the operand `imm3` to specify the interrupt level (0–7) to be set to the IL field in the PSR.

The processor performs the same interrupt processing as that of the hardware interrupt.

6.6 HALT and SLEEP Mode Cancellation

HALT and SLEEP modes are cleared by the following signals, which start the CPU.

- Interrupt request signal sent to the CPU from the ITC
- NMI signal output by the watchdog timer
- Debug interrupt signal
- Reset signal

Notes:

- If the CPU is able to receive interrupts when HALT or SLEEP mode has been cleared by an interrupt request for the CPU from the ITC, processing branches to the interrupt handler routine immediately after cancellation. In all other cases, the program is executed following the `halt` or `slp` instruction.

- HALT or SLEEP mode clearing due to interrupt requests cannot be masked (prohibited) using ITC interrupt level settings.
- SLEEP mode is not released even if each oscillator circuit is operating and an interrupt is made by a peripheral module operating at each clock. SLEEP mode is only released when interrupted from ports P0, P1, P2 or P3.

For more information, see “Power Saving by Clock Control” in the appendix chapter. For the oscillator circuit and system clock statuses after HALT or SLEEP mode is canceled, see the “Clock Generator (CLG)” chapter.

6.7 Control Register Details

Table 6.7.1 List of ITC Registers

Address	Register name		Function
0x4306	ITC_LV0	Interrupt Level Setup Register 0	Sets the P0 and P1 interrupt levels.
0x4308	ITC_LV1	Interrupt Level Setup Register 1	Sets the SWT and CT/RTC interrupt levels.
0x430a	ITC_LV2	Interrupt Level Setup Register 2	Sets the T16A Ch.2 and SVD interrupt levels.
0x430c	ITC_LV3	Interrupt Level Setup Register 3	Sets the LCD/SPI Ch.2 and T16A Ch.0 interrupt levels.
0x430e	ITC_LV4	Interrupt Level Setup Register 4	Sets the T16 Ch.0/4 and Ch.1 interrupt levels.
0x4310	ITC_LV5	Interrupt Level Setup Register 5	Sets the T16 Ch.2 and T16 Ch.3/T16A Ch.3 interrupt levels.
0x4312	ITC_LV6	Interrupt Level Setup Register 6	Sets the UART Ch.0 and Ch.1 interrupt levels.
0x4314	ITC_LV7	Interrupt Level Setup Register 7	Sets the SPI Ch.0 and I2CM interrupt levels.
0x4316	ITC_LV8	Interrupt Level Setup Register 8	Sets the REMC/SPI Ch.1 and T16A Ch.1 interrupt levels.
0x4318	ITC_LV9	Interrupt Level Setup Register 9	Sets the ADC10 and RFC interrupt levels.
0x431a	ITC_LV10	Interrupt Level Setup Register 10	Sets the P2 and P3 interrupt levels.
0x431c	ITC_LV11	Interrupt Level Setup Register 11	Sets the I2CS interrupt level.

The ITC registers are described in detail below. These are 16-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

Interrupt Level Setup Register 0 (ITC_LV0)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 0 (ITC_LV0)	0x4306 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV1[2:0]	P1 interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV0[2:0]	P0 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV1[2:0]: P1 Interrupt Level Bits

Sets the P1 port interrupt level (0 to 7). (Default: 0x0)

The S1C17 Core does not accept interrupts with a level set lower than the PSR IL value.

The ITC uses the interrupt level when multiple interrupt requests occur simultaneously.

If multiple interrupt requests enabled by the interrupt enable bit occur simultaneously, the ITC sends the interrupt request with the highest level set by the ITC_LVx registers (0x4306 to 0x431c) to the S1C17 Core.

If multiple interrupt requests with the same interrupt level occur simultaneously, the interrupt with the lowest vector number is processed first.

The other interrupts are held until all interrupts of higher priority have been accepted by the S1C17 Core.

If an interrupt requests of higher priority occurs while the ITC outputs an interrupt request signal to the S1C17 Core (before acceptance by the S1C17 Core), the ITC alters the vector number and interrupt level signals to the setting details of the most recent interrupt. The immediately preceding interrupt is held.

D[7:3] Reserved

D[2:0] ILV0[2:0]: P0 Interrupt Level Bits

Sets the P0 port interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0].

Interrupt Level Setup Register 1 (ITC_LV1)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 1 (ITC_LV1)	0x4308 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV3[2:0]	CT/RTC interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV2[2:0]	SWT interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV3[2:0]: CT/RTC Interrupt Level Bits

Sets the clock timer or real-time clock interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV2[2:0]: SWT Interrupt Level Bits

Sets the stopwatch timer interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 2 (ITC_LV2)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 2 (ITC_LV2)	0x430a (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV5[2:0]	SVD interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV4[2:0]	T16A Ch.2 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV5[2:0]: SVD Interrupt Level Bits

Sets the SVD interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV4[2:0]: T16A Ch.2 Interrupt Level Bits

Sets the 16-bit PWM timer Ch.2 interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 3 (ITC_LV3)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 3 (ITC_LV3)	0x430c (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV7[2:0]	T16A Ch.0 interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV6[2:0]	LCD/SPI Ch.2 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV7[2:0]: T16A Ch.0 Interrupt Level Bits

Sets the 16-bit PWM timer Ch.0 interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV6[2:0]: LCD/SPI Ch.2 Interrupt Level Bits

Sets the LCD and SPI Ch.2 interrupt levels (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 4 (ITC_LV4)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 4 (ITC_LV4)	0x430e (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV9[2:0]	T16 Ch.1 interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV8[2:0]	T16 Ch.0 & Ch.4 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV9[2:0]: T16 Ch.1 Interrupt Level Bits

Sets the 16-bit timer Ch.1 interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV8[2:0]: T16 Ch.0 & Ch.4 Interrupt Level Bits

Sets the 16-bit timer Ch.0 and Ch.4 interrupt levels (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 5 (ITC_LV5)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 5 (ITC_LV5)	0x4310 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV11[2:0]	T16 Ch.3/T16A Ch.3 interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV10[2:0]	T16 Ch.2 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV11[2:0]: T16 Ch.3/T16A Ch.3 Interrupt Level Bits

Sets the 16-bit timer Ch.3 and 16-bit PWM timer Ch.3 interrupt levels (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV10[2:0]: T16 Ch.2 Interrupt Level Bits

Sets the 16-bit timer Ch.2 interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 6 (ITC_LV6)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 6 (ITC_LV6)	0x4312 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV13[2:0]	UART Ch.1 interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV12[2:0]	UART Ch.0 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV13[2:0]: UART Ch.1 Interrupt Level Bits

Sets the UART Ch.1 interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV12[2:0]: UART Ch.0 Interrupt Level Bits

Sets the UART Ch.0 interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 7 (ITC_LV7)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 7 (ITC_LV7)	0x4314 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV15[2:0]	I2CM interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV14[2:0]	SPI Ch.0 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV15[2:0]: I2CM Interrupt Level Bits

Sets the I²C master interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV14[2:0]: SPI Ch.0 Interrupt Level Bits

Sets the SPI Ch.0 interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 8 (ITC_LV8)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 8 (ITC_LV8)	0x4316 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV17[2:0]	T16A Ch.1 interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV16[2:0]	REMC/SPI Ch.1 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV17[2:0]: T16A Ch.1 Interrupt Level Bits

Sets the 16-bit PWM timer Ch.1 interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV16[2:0]: REMC/SPI Ch.1 Interrupt Level Bits

Sets the IR remote controller and SPI Ch.1 interrupt levels (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 9 (ITC_LV9)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 9 (ITC_LV9)	0x4318 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV19[2:0]	RFC interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV18[2:0]	ADC10 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV19[2:0]: RFC Interrupt Level Bits

Sets the R/F converter interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV18[2:0]: ADC10 Interrupt Level Bits

Sets the A/D converter interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 10 (ITC_LV10)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 10 (ITC_LV10)	0x431a (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10–8	ILV21[2:0]	P3 interrupt level	0 to 7	0x0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2–0	ILV20[2:0]	P2 interrupt level	0 to 7	0x0	R/W	

D[15:11] Reserved

D[10:8] ILV21[2:0]: P3 Interrupt Level Bits

Sets the P3 port interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

D[7:3] Reserved

D[2:0] ILV20[2:0]: P2 Interrupt Level Bits

Sets the P2 port interrupt level (0 to 7). (Default: 0x0)
See the description of ILV1[2:0]/ITC_LV0 register.

Interrupt Level Setup Register 11 (ITC_LV11)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 11 (ITC_LV11)	0x431c (16 bits)	D15-3	--	reserved	--	--	--	0 when being read.
		D2-0	ILV22[2:0]	I2CS interrupt level	0 to 7	0x0	R/W	

D[15:3] Reserved

D[2:0] ILV22[2:0]: I2CS Interrupt Level Bits

Sets the I²C slave interrupt level (0 to 7). (Default: 0x0)

See the description of ILV1[2:0]/ITC_LV0 register.

7 Clock Generator (CLG)

7.1 CLG Module Overview

The clock generator (CLG) controls the internal oscillators and the system clocks to be supplied to the S1C17 Core, on-chip peripheral modules, and external devices.

The features of the CLG module are listed below.

- Generates the operating clocks with the built-in oscillators.
 - IOSC oscillator circuit: 2.7 MHz (typ.)
 - OSC3 oscillator circuit: 8.2 MHz (max.) crystal or ceramic oscillator circuit
Supports an external clock input
 - OSC1 oscillator circuit: 32.768 kHz (typ.) crystal oscillator circuit
- Switches the system clock. The system clock source can be selected from IOSC, OSC3, and OSC1 via software.
- Generates the CPU core clock (CCLK) and controls the clock supply to the core block. The CCLK frequency can be selected from system clock \times 1/1, 1/2, 1/4, and 1/8.
- Controls the clock supply to the peripheral modules.
- Turns the clocks on and off according to the CPU operating status (RUN, HALT, or SLEEP).
- Supports quick-restart processing from SLEEP mode.
 - Turns IOSC on forcibly and switches the system clock to IOSC when SLEEP mode is canceled.
 - The On/Off state of the OSC3/OSC1 oscillator circuit before release of SLEEP mode can be recovered automatically after SLEEP mode has been released.
- Controls two clock outputs to external devices.
- An oscillator circuit that is not to be stopped in SLEEP mode is selectable.
 - However, SLEEP mode can be released by an interrupt only from a peripheral circuit that is being connected to an I/O port.

Figure 7.1.1 shows the clock system and CLG module configuration.

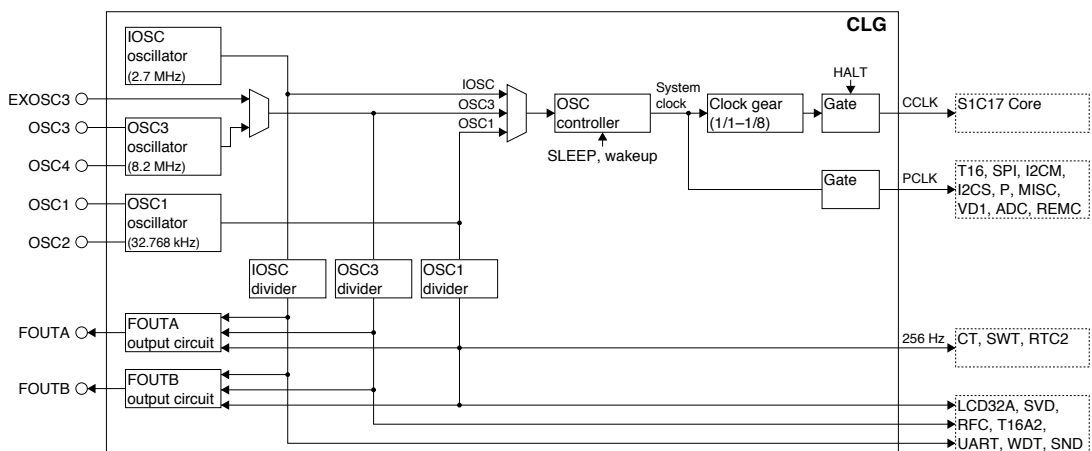


Figure 7.1.1 CLG Module Configuration

To reduce current consumption, control the clock in conjunction with processing and use HALT and SLEEP modes. For more information on reducing current consumption, see “Power Saving” in the appendix chapter.

7.2 CLG Input/Output Pins

Table 7.2.1 lists the input/output pins for the CLG module.

Table 7.2.1 List of CLG Pins

Pin name	I/O	Qty	Function
OSC1	I	1	OSC1 oscillator input pin Connect a crystal resonator (32.768 kHz) and a gate capacitor.
OSC2	O	1	OSC1 oscillator output pin Connect a crystal resonator (32.768 kHz).
OSC3	I	1	OSC3 oscillator input pin Connect a crystal or ceramic resonator (max. 8.2 MHz), a feedback resistor, and a gate capacitor.
OSC4	O	1	OSC3 oscillator output pin Connect a crystal or ceramic resonator (max. 8.2 MHz), a feedback resistor, and a drain capacitor.
EXOSC3	I	1	External OSC3 clock input pin Input an external clock used as the OSC3 clock.
FOUTA	O	1	FOUTA clock output pin Outputs a divided IOSC/OSC3 clock or the OSC1 clock.
FOUTB	O	1	FOUTB clock output pin Outputs a divided IOSC/OSC3 clock or the OSC1 clock.

The CLG input/output pins (EXOSC3, FOUTA, FOUTB) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as the CLG input/output pins. For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

7.3 Oscillators

The CLG module contains three internal oscillator circuits (IOSC, OSC3, and OSC1). The IOSC and OSC3 oscillators generate the main clock for high-speed operation of the S1C17 Core and peripheral circuits. The OSC1 oscillator generates a sub-clock for timers and low-power operations. The IOSC clock is selected as the system clock after an initial reset. Oscillator on/off switching and system clock selection (from IOSC, OSC3 and OSC1) are controlled with software.

7.3.1 IOSC Oscillator

The IOSC oscillator initiates high-speed oscillation without external components. It initiates oscillation when power is turned on. The S1C17 Core and peripheral circuits operates with this oscillation clock after an initial reset.




Figure 7.3.1.1 IOSC Oscillator Circuit

IOSC oscillation on/off

The IOSC oscillator stops oscillating when IOSCEN/CLG_CTL register is set to 0 and starts oscillating when set to 1. When IOSCSLPEN/CLG_SLPCTL register is 1, the oscillating is stopped in SLEEP mode.

After an initial reset, IOSCEN is set to 1, and the IOSC oscillator goes on. Since the IOSC clock is used as the system clock, the S1C17 Core starts operating using the IOSC clock.

Stabilization wait time at start of IOSC oscillation

The IOSC oscillator circuit includes an oscillation stabilization wait circuit to prevent malfunctions due to unstable clock operations at the start of IOSC oscillation—e.g., when the IOSC oscillator is turned on with software. Figure 7.3.1.2 shows the relationship between the oscillation start time and the oscillation stabilization wait time.

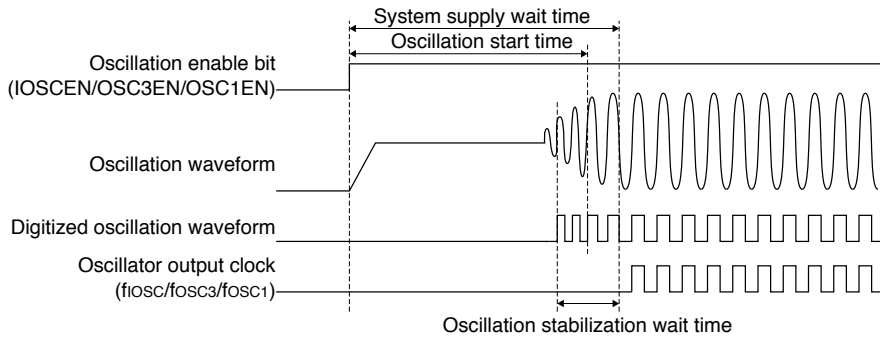


Figure 7.3.1.2 Oscillation Start Time and Oscillation Stabilization Wait Time

The IOSC clock is not supplied to the system until the time set for this circuit has elapsed. Use IOSCWT[1:0]/CLG_CTL register to select one of four oscillation stabilization wait times.

Table 7.3.1.1 IOSC Oscillation Stabilization Wait Time Settings

IOSCWT[1:0]	Oscillation stabilization wait time
0x3	8 cycles
0x2	16 cycles
0x1	32 cycles
0x0	64 cycles

(Default: 0x0)

This is set to 64 cycles (IOSC clock) after an initial reset. This means the CPU can start operating when the CPU operation start time at initial reset indicated below (at a maximum) has elapsed after the reset state is canceled. For the oscillation start time, see the “Electrical Characteristics” chapter.

CPU operation start time at initial reset \leq IOSC oscillation start time (max.) + IOSC oscillation stabilization wait time (64 cycles)

When the system clock is switched to IOSC immediately after turning the IOSC oscillator on, the IOSC clock is supplied to the system after the IOSC clock system supply wait time indicated below (at a maximum) has elapsed. If the power supply voltage V_{DD} has stabilized sufficiently, IOSCWT[1:0] can be set to 0x3 to reduce the oscillation stabilization wait time.

IOSC clock system supply wait time \leq IOSC oscillation start time (max.) + IOSC oscillation stabilization wait time

7.3.2 OSC3 Oscillator

The OSC3 oscillator is a high-precision, high-speed oscillator circuit that uses either a crystal resonator or a ceramic resonator. It can be switched for use with the IOSC oscillator. Figure 7.3.2.1 shows the OSC3 oscillator configuration.

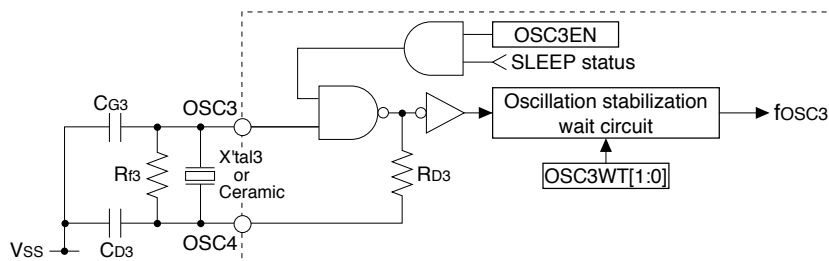


Figure 7.3.2.1 OSC3 Oscillator Circuit

A crystal resonator (X'tal3) or ceramic resonator (Ceramic) and a feedback resistor (R_{F3}) should be connected between the OSC3 and OSC4 pins. Additionally, two capacitors (C_{G3} and C_{D3}) should be connected between the OSC3/OSC4 pins and V_{SS} .

OSC3 oscillation on/off

The OSC3 oscillator circuit stops oscillating when OSC3EN/CLG_CTL register is set to 0 and starts oscillating when set to 1. When OSC3SLPEN/CLG_SLPCTL register is 1, the oscillating is stopped in SLEEP mode. After an initial reset, OSC3EN is set to 0 and the OSC3 oscillator circuit is halted.

Stabilization wait time at start of OSC3 oscillation

The OSC3 oscillator circuit includes an oscillation stabilization wait circuit to prevent malfunctions due to unstable clock operations at the start of OSC3 oscillation—e.g., when the OSC3 oscillator is turned on with software. The OSC3 clock is not supplied to the system until the time set for this circuit has elapsed. Use OSC3WT[1:0]/CLG_CTL register to select one of four oscillation stabilization wait times.

Table 7.3.2.1 OSC3 Oscillation Stabilization Wait Time Settings

OSC3WT[1:0]	Oscillation stabilization wait time
0x3	128 cycles
0x2	256 cycles
0x1	512 cycles
0x0	1024 cycles

(Default: 0x0)

This is set to 1,024 cycles (OSC3 clock) after an initial reset.

When the system clock is switched to OSC3 immediately after the OSC3 oscillator circuit is turned on, the OSC3 clock is supplied to the system after the OSC3 clock system supply wait time indicated below (at a maximum) has elapsed. For the oscillation start time, see the “Electrical Characteristics” chapter.

OSC3 clock system supply wait time ≤ OSC3 oscillation start time (max.) + OSC3 oscillation stabilization wait time

Note: Oscillation stability will vary, depending on the resonator and other external components. Carefully consider the OSC3 oscillation stabilization wait time before reducing the time.

External OSC3 clock input

An external clock can be used as the OSC3 clock instead of the internal OSC3 clock described above. In this case, input a clock via the EXOSC3 pin. For the input clock requirements, see the “Electrical Characteristics” chapter.

To use the EXOSC3 pin, it is necessary to configure using the port function select bit as the pin is configured as an I/O port. For switching port functions, see the “I/O Port (P)” chapter.

The clock input from the EXOSC3 pin is enabled by setting EXOSC3EN/CLG_CTL register to 1 (disabled if it is 0). Furthermore, EXOSC3SEL/CLG_SRC register must be set to select either the internal OSC3 clock or the external input clock to be used as the OSC3 clock. When EXOSC3SEL is 0 (default), the internal OSC3 clock is selected. When EXOSC3SEL is set to 1, the external input clock is selected.

Note: Enabling the clock input from the EXOSC3 pin by setting EXOSC3EN to 1 does not activate the oscillation stabilization wait circuit. Be sure to supply a stabilized clock.

7.3.3 OSC1 Oscillator

The OSC1 oscillator is a high-precision, low-speed oscillator circuit that uses a 32.768 kHz crystal resonator. The OSC1 clock is generally used as the timer operation clock (for the clock timer, stopwatch timer, watchdog timer, and 16-bit PWM timer) and an operation clock for the LCD driver, R/F converter, and supply voltage detector. It can be used as the system clock instead of the IOSC or OSC3 clock to reduce power consumption when no high-speed processing is required.

Figure 7.3.3.1 shows the OSC1 oscillator configuration.

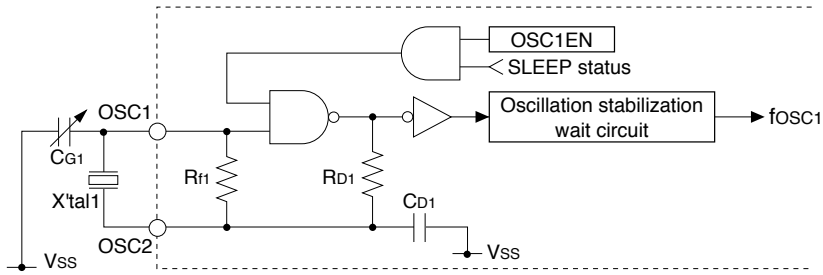


Figure 7.3.3.1 OSC1 Oscillator Circuit

A crystal resonator (X'tal1, typ. 32.768 kHz) should be connected between the OSC1 and OSC2 pins. Additionally, trimmer capacitor CG1 (0 to 25 pF) should be connected between the OSC1 pin and VSS.

OSC1 oscillation on/off

The OSC1 oscillator stops oscillating when OSC1EN/CLG_CTL register is set to 0 and starts oscillating when set to 1. When OSC1SLPEN/CLG_SLPCTL register is 1, the oscillating is stopped in SLEEP mode.

After an initial reset, OSC1EN is set to 0, and the OSC1 oscillator circuit is halted.

Stabilization wait time at start of OSC1 oscillation

The OSC1 oscillator includes an oscillation stabilization wait circuit (fixed at 256 cycles) to prevent malfunctions caused by unstable clock operations at the start of OSC1 oscillation—e.g., when the OSC1 oscillator is turned on with software. When the system clock is switched to OSC1 immediately after the OSC1 oscillator circuit is turned on, the OSC1 clock is supplied to the system after the OSC1 clock system supply wait time indicated below (at a maximum) has elapsed. For the oscillation start time, see the “Electrical Characteristics” chapter.

OSC1 clock system supply wait time \leq OSC1 oscillation start time (max.) + OSC1 oscillation stabilization wait time (256 cycles)

7.4 System Clock Switching

The figure below shows the system clock selector.

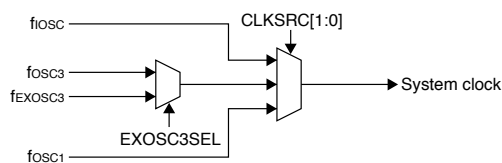


Figure 7.4.1 System Clock Selector

The S1C17706 has three system clock sources (IOSC, OSC3, and OSC1) and it start operating with the IOSC clock after an initial reset. The system clock can be switched to the OSC3 clock when a high-speed clock is required for the processing, or to the OSC1 clock for power saving. Use CLKSRC[1:0]/CLG_SRC register for this switching. Oscillator circuits other than those selected as the system clock source and not used for running peripheral circuits can be shut down to reduce current consumption.

Table 7.4.1 System Clock Selection

CLKSRC[1:0]	System clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

The following shows system clock switching procedures:

Switching the system clock to OSC3 (internal clock) from IOSC or OSC1

1. Set the OSC3 oscillation stabilization wait time if necessary. (OSC3WT[1:0])
2. Turn the OSC3 oscillator on if it is off. (OSC3EN = 1)
3. Select the OSC3 clock as the system clock. (CLKSRC[1:0] = 0x2)
4. Turn the IOSC or OSC1 oscillator off if peripheral modules and FOUTA/B output circuits have not used the IOSC or OSC1 clock.

Switching the system clock to OSC3 (external clock) from IOSC or OSC1

1. Input the external OSC3 clock to the EXOSC3 pin. The input clock must be stabilized.
2. Enable the external OSC3 clock. (EXOSC3SEL = 1, EXOSC3EN = 1)
3. Select the OSC3 clock as the system clock. (CLKSRC[1:0] = 0x2)
4. Turn the IOSC or OSC1 oscillator off if peripheral modules and FOUTA/B output circuits have not used the IOSC or OSC1 clock.

Switching the system clock to OSC1 from IOSC or OSC3

1. Turn the OSC1 oscillator on. (OSC1EN = 1)
2. Select the OSC1 clock as the system clock. (CLKSRC[1:0] = 0x1)
3. Turn the IOSC or OSC3 oscillator off if peripheral modules and FOUTA/B output circuits have not used the IOSC or OSC3 clock.

Switching the system clock to IOSC from OSC3 or OSC1

1. Set the IOSC oscillation stabilization wait time if necessary. (IOSCW[1:0])
2. Turn the IOSC oscillator on if it is off. (IOSCEN = 1)
3. Select the IOSC clock as the system clock. (CLKSRC[1:0] = 0x0)
4. Turn the OSC3 or OSC1 oscillator off if peripheral modules and FOUTA/B output circuits have not used the OSC3 or OSC1 clock.

Notes: • The oscillator to be used as the system clock source must be operated before switching the system clock. Otherwise, the CLG will not switch the system clock source, even if CLKSRC[1:0] is written to, and the CLKSRC[1:0] value will remain unchanged. The table below lists the combinations of clock operating status and register settings enabling system clock selection.

Table 7.4.2 System Clock Switching Conditions

IOSCEN	OSC3EN	EXOSC3EN	OSC1EN	EXOSC3SEL	System clock
1	1	1	1	*	IOSC, OSC3/EXOSC3, or OSC1
1	1	0	1	0	IOSC, OSC3, or OSC1
1	0	1	1	1	IOSC, EXOSC3, or OSC1
1	0	0	1	*	IOSC or OSC1
0	1	1	1	*	OSC3/EXOSC3 or OSC1
0	1	0	1	0	OSC3 or OSC1
0	0	1	1	1	EXOSC3 or OSC1

- The oscillator circuit selected as the system clock source cannot be turned off.
- Continuous write/read access to CLKSRC[1:0] is prohibited. At least one instruction unrelated to CLKSRC[1:0] access must be inserted between the write and read instructions.
- When SLEEP mode is canceled, the status of each oscillator On/Off before the chip entered SLEEP mode is restored. The IOSC oscillator circuit is turned on (IOSCEN = 1) and the system clock is IOSC (CLKSRC[1:0] = 0x0). Canceling HALT mode does not change the clock status configured before the chip entered HALT mode.

7.5 CPU Core Clock (CCLK) Control

The CLG module includes a clock gear to slow down the system clock to send to the S1C17 Core. To reduce current consumption, operate the S1C17 Core with the slowest possible clock speed. The `halt` instruction can be executed to stop the clock supply from the CLG to the S1C17 Core for power savings.




Figure 7.5.1 CCLK Supply System

Clock gear settings

CCLKGR[1:0]/CLG_CCLK register is used to select the gear ratio to reduce system clock speeds.

Table 7.5.1 CCLK Gear Ratio Selection

CCLKGR[1:0]	Gear ratio
0x3	1/8
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

Clock supply control

The CCLK clock supply is stopped by executing the `halt` instruction. Since this does not stop the system clock, peripheral modules will continue to operate.

HALT mode is cleared by resetting, NMI, or other interrupts. The CCLK supply resumes when HALT mode is cleared.

Executing the `slp` instruction suspends system clock supply to the CLG, thereby halting the CCLK supply as well. Clearing SLEEP mode with an external interrupt restarts the system clock supply and the CCLK supply.

7.6 Peripheral Module Clock (PCLK) Control

The CLG module also controls the clock supply to peripheral modules.

The system clock is used unmodified for the peripheral module clock (PCLK).

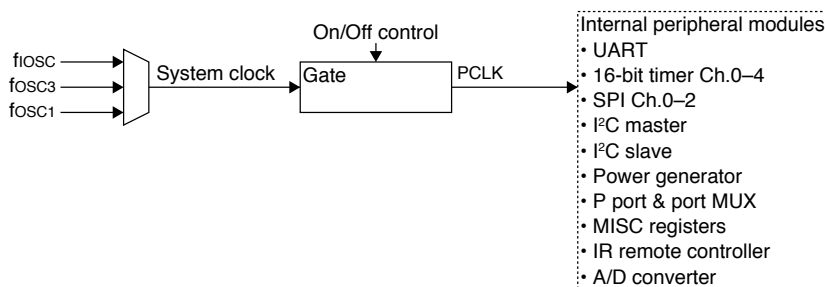


Figure 7.6.1 Peripheral Module Clock Control Circuit

Clock supply control

PCLK supply is controlled by PCKEN[1:0]/CLG_PCLK register.

Table 7.6.1 PCLK Control

PCKEN[1:0]	PCLK supply
0x3	Enabled (on)
0x2	Setting prohibited
0x1	Setting prohibited
0x0	Disabled (off)

(Default: 0x3)

7 CLOCK GENERATOR (CLG)

The default setting is 0x3, which enables the clock supply. Stop the clock supply to reduce current consumption unless all peripheral modules (modules listed below) within the internal peripheral circuit area need to be running.

Note: Do not set PCKEN[1:0]/CLG_PCLK register to 0x2 or 0x1, since doing so will stop the operation of certain peripheral modules.

Table 7.6.2 Peripheral Modules and Operating Clocks

Peripheral modules	Operating clock	Remarks
UART Ch.0 and 1	PCLK	The PCLK supply cannot be disabled if one or more peripheral modules in these list must be operated. The PCLK supply can be disabled if all the peripheral circuits in these list can be stopped.
16-bit timer Ch.0 to 4		
SPI Ch.0 to 2		
I ² C master		
I ² C slave		
Power generator		
P port & port MUX		
MISC registers		
IR remote controller		
A/D converter		
Clock timer	Divided OSC1 clock	The OSC1 oscillator circuit cannot be disabled if one or more peripheral modules in these list must be operated. The PCLK supply can be disabled.
Stopwatch timer		
Real-time clock		
LCD driver	Clock selected by software (divided IOSC/OSC3/OSC1 clock)	The oscillator circuit used as the clock source cannot be disabled (see Section 7.7 or each peripheral module chapter). The PCLK supply can be disabled.
Supply voltage detector		
R/F converter		
16-bit PWM timer Ch.0 to 3		
FOUTA/FOUTB outputs		
Watchdog timer		
Sound generator		

7.7 Clock External Output (FOUTA, FOUTB)

A divided IOSC/OSC3 clock or the OSC1 clock can be output to external devices.

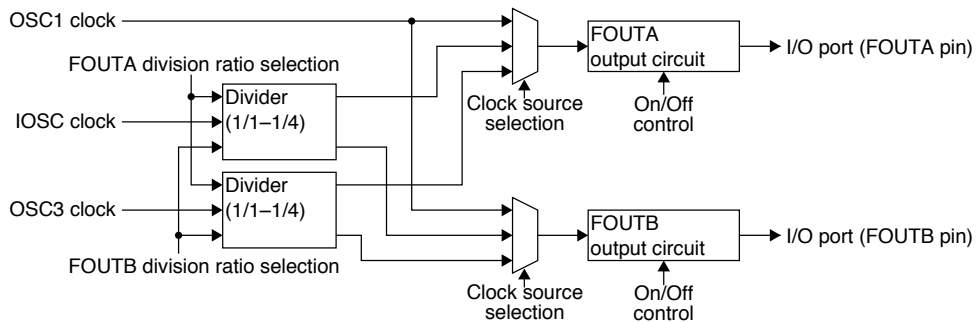


Figure 7.7.1 Clock Output Circuit

There are two output systems available: FOUTA and FOUTB. The FOUTA and FOUTB output circuits have the same functions.

Output pin setting

The FOUTA and FOUTB output pins are shared with I/O ports. The pin is configured for the I/O port by default, so the pin function should be changed using the port function select bit before the clock output can be used. See the “I/O Ports (P)” chapter for the FOUTA/FOUTB pins and selecting pin functions.

Clock source selection

The clock source can be selected from IOSC, OSC3, and OSC1 using FOUTASRC[1:0]/CLG_FOUTA register or FOUTBSRC[1:0]/CLG_FOUTB register.

Table 7.7.1 Clock Source Selection

FOUTASRC[1:0]/FOUTBSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

Clock frequency selection

Three different clock output frequencies can be selected when IOSC or OSC3 is used as the clock source. Select the division ratio for the source clock using FOUTAD[1:0]/CLG_FOUTA register or FOUTBD[1:0]/CLG_FOUTB register.

Table 7.7.2 IOSC/OSC3 Division Ratio Selection

FOUTAD[1:0]/FOUTBD[1:0]	Division ratio
0x3	Reserved
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

Clock output control

The clock output is controlled using FOUTAE/CLG_FOUTA register or FOUTBE/CLG_FOUTB register. Setting FOUTAE/FOUTBE to 1 outputs the FOUTA/FOUTB clock from the FOUTA/FOUTB pin. Setting it to 0 disables output.




Figure 7.7.2 FOUTA/FOUTB Output

Note: Since the FOUTA/FOUTB signal is not synchronized with FOUTAE/FOUTBE writing, switching output on or off will generate certain hazards.

7.8 Control Register Details

Table 7.8.1 List of CLG Registers

Address	Register name	Function
0x5060	CLG_SRC	Clock Source Select Register Selects the clock source.
0x5061	CLG_CTL	Oscillation Control Register Controls oscillation.
0x5062	CLG_SLPCTL	Sleep Control Register Controls oscillation in SLEEP mode.
0x5064	CLG_FOUTA	FOUTA Control Register Controls FOUTA clock output.
0x5065	CLG_FOUTB	FOUTB Control Register Controls FOUTB clock output.
0x5080	CLG_PCLK	PCLK Control Register Controls the PCLK supply.
0x5081	CLG_CCLK	CCLK Control Register Configures the CCLK division ratio.

The CLG module registers are described in detail below. These are 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

Clock Source Select Register (CLG_SRC)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Clock Source Select Register (CLG_SRC)	0x5060 (8 bits)	D7-5	–	reserved	–	–	–	0 when being read.	
		D4	EXOSC3SEL	External OSC3 clock select	1 External 0 Internal	0	R/W		
		D3-2	–	reserved	–	–	–	–	0 when being read.
		D1-0	CLKSRC[1:0]	System clock source select	CLKSRC[1:0]	Clock source	0x0	R/W	
					0x3	reserved			
0x2	OSC3								
0x1	OSC1								
0x0	IOSC								

D[7:5] Reserved

D4 EXOSC3SEL: External OSC3 Clock Select Bit

Selects the OSC3 clock.

1 (R/W): External clock

0 (R/W): Internal clock (default)

When using an external clock as the OSC3 clock, supply the clock to the EXOSC3 pin and set the EXOSC3EN/CLG_CTL register to 1. Also set this bit to 1.

D[3:2] Reserved

D[1:0] CLKSRC[1:0]: System Clock Source Select Bits

Selects the system clock source.

Table 7.8.2 System Clock Selection

CLKSRC[1:0]	System clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

Select IOSC or OSC3 for normal (high-speed) operations. If no high-speed clock is required, OSC1 can be set as the system clock and IOSC and OSC3 stopped to reduce current consumption.

- Notes:**
- The oscillator to be used as the system clock source must be operated before switching the system clock. Otherwise, the CLG will not switch the system clock source, even if CLKSRC[1:0] is written to, and the CLKSRC[1:0] value will remain unchanged. The table below lists the combinations of clock operating status and register settings enabling system clock selection.

Table 7.8.3 System Clock Switching Conditions

IOSCEN	OSC3EN	EXOSC3EN	OSC1EN	EXOSC3SEL	System clock
1	1	1	1	*	IOSC, OSC3/EXOSC3, or OSC1
1	1	0	1	0	IOSC, OSC3, or OSC1
1	0	1	1	1	IOSC, EXOSC3, or OSC1
1	0	0	1	*	IOSC or OSC1
0	1	1	1	*	OSC3/EXOSC3 or OSC1
0	1	0	1	0	OSC3 or OSC1
0	0	1	1	1	EXOSC3 or OSC1

- The oscillator circuit selected as the system clock source cannot be turned off.
- Continuous write/read access to CLKSRC[1:0] is prohibited. At least one instruction unrelated to CLKSRC[1:0] access must be inserted between the write and read instructions.
- When SLEEP mode is canceled, the status of each oscillator On/Off before the chip entered SLEEP mode is restored. The IOSC oscillator circuit is turned on (IOSCEN = 1) and the system clock is IOSC (CLKSRC[1:0] = 0x0). Canceling HALT mode does not change the clock status configured before the chip entered HALT mode.

Oscillation Control Register (CLG_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Oscillation Control Register (CLG_CTL)	0x5061 (8 bits)	D7–6	IOSCWT[1:0]	IOSC wait cycle select	IOSCWT[1:0]	Wait cycle	0x0	R/W	
					0x3	8 cycles			
					0x2	16 cycles			
					0x1	32 cycles			
		D5–4	OSC3WT[1:0]	OSC3 wait cycle select	OSC3WT[1:0]	Wait cycle	0x0	R/W	
					0x3	128 cycles			
					0x2	256 cycles			
D3	EXOSC3EN	External OSC3 enable	1	Enable	0	Disable	0	R/W	
D2	IOSCEN	IOSC enable	1	Enable	0	Disable	1	R/W	
D1	OSC1EN	OSC1 enable	1	Enable	0	Disable	0	R/W	
D0	OSC3EN	OSC3 enable	1	Enable	0	Disable	0	R/W	

D[7:6] IOSCWT[1:0]: IOSC Wait Cycle Select Bits

An oscillation stabilization wait time is set to prevent malfunctions due to unstable clock operations at the start of IOSC oscillation.

The IOSC clock is not supplied to the system immediately after IOSC oscillation starts until the time set here has elapsed.

Table 7.8.4 IOSC Oscillation Stabilization Wait Time Settings

IOSCWT[1:0]	Oscillation stabilization wait time
0x3	8 cycles
0x2	16 cycles
0x1	32 cycles
0x0	64 cycles

(Default: 0x0)

This is set to 64 cycles (IOSC clock) after an initial reset. This means the CPU can start operating when the CPU operation start time at initial reset indicated below (at a maximum) has elapsed after the reset state is canceled.

CPU operation start time at initial reset ≤ IOSC oscillation start time (max.) + IOSC oscillation stabilization wait time (64 cycles)

When the system clock is switched to IOSC immediately after turning the IOSC oscillator on, the IOSC clock is supplied to the system after the IOSC clock system supply wait time indicated below (at a maximum) has elapsed. If the power supply voltage V_{DD} has stabilized sufficiently, IOSCWT[1:0] can be set to 0x3 to reduce the oscillation stabilization wait time.

IOSC clock system supply wait time ≤ IOSC oscillation start time (max.) + IOSC oscillation stabilization wait time

D[5:4] OSC3WT[1:0]: OSC3 Wait Cycle Select Bits

An oscillation stabilization wait time is set to prevent malfunctions due to unstable clock operation at the start of OSC3 oscillation.

The OSC3 clock is not supplied to the system immediately after OSC3 oscillation starts—e.g., when the OSC3 oscillator is turned on with software—until the time set here has elapsed.

Table 7.8.5 OSC3 Oscillation Stabilization Wait Time Settings

OSC3WT[1:0]	Oscillation stabilization wait time
0x3	128 cycles
0x2	256 cycles
0x1	512 cycles
0x0	1024 cycles

(Default: 0x0)

This is set to 1,024 cycles (OSC3 clock) after an initial reset.

When the system clock is switched to OSC3 immediately after the OSC3 oscillator circuit is turned on, the OSC3 clock is supplied to the system after the OSC3 clock system supply wait time indicated below (at a maximum) has elapsed.

7 CLOCK GENERATOR (CLG)

OSC3 clock system supply wait time \leq OSC3 oscillation start time (max.) + OSC3 oscillation stabilization wait time

Note: Oscillation stability will vary, depending on the resonator and other external components. Carefully consider the OSC3 oscillation stabilization wait time before reducing the time.

D3 EXOSC3EN: External OSC3 Enable Bit

Enables or disables input of an external OSC3 clock.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

Note: The external OSC3 clock input cannot be disabled if the external OSC3 clock is being used as the system clock.

D2 IOSCEN: IOSC Enable Bit

Enables or disables IOSC oscillator operations.

1 (R/W): Enabled (on) (default)

0 (R/W): Disabled (off)

Notes:

- The IOSC oscillator cannot be stopped if the IOSC clock is being used as the system clock.
- The IOSC oscillator cannot be stopped if the WDT selection clock is being used as the IOSC clock.

D1 OSC1EN: OSC1 Enable Bit

Enables or disables OSC1 oscillator operations.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

When the system clock is switched to OSC1 immediately after the OSC1 oscillator circuit is turned on, the OSC1 clock is supplied to the system after the OSC1 clock system supply wait time indicated below (at a maximum) has elapsed.

OSC1 clock system supply wait time \leq OSC1 oscillation start time (max.) + OSC1 oscillation stabilization wait time (256 cycles)

Notes:

- The OSC1 oscillator cannot be stopped if the OSC1 clock is being used as the system clock.
- The OSC1 oscillator cannot be stopped if the WDT selection clock is being used as the OSC1 clock.

D0 OSC3EN: OSC3 Enable Bit

Enables or disables OSC3 oscillator operations.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

Notes:

- The OSC3 oscillator cannot be stopped if the OSC3 clock is being used as the system clock.
- The OSC3 oscillator cannot be stopped if the WDT selection clock is being used as the OSC3 clock.

Sleep Control Register (CLG_SLPCTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Sleep Control Register (CLG_SLPCTL)	0x5062 (8 bits)	D7	–	reserved	–	0	R	0 when being read.
		D6	IOSCSLPEN	IOSC clock sleep control	1 Enable(Sleep) 0 Disable(Sleep)	1	R/W	
		D5	OSC1SLPEN	OSC1 clock sleep control	1 Enable(Sleep) 0 Disable(Sleep)	1		
		D4	OSC3SLPEN	OSC3 clock sleep control	1 Enable(Sleep) 0 Disable(Sleep)	1		
		D3–2	–	reserved	–	0	R	0 when being read.
		D1	–	reserved	–	1	R	1 when being read.
		D0	–	reserved	–	0	R	0 when being read.

D7 Reserved

D6 IOSCSLPEN: IOSC Clock Sleep Control Bit

Enables or disables IOSC oscillator stops by SLEEP mode. Setting it to 0 continues the operating set by IOSCEN/CLG_CTL in SLEEP mode.

1 (R/W): Enabled (on) (default)

0 (R/W): Disabled (off)

D5 OSC1SLPEN: OSC1 Clock Sleep Control Bit

Enables or disables OSC1 oscillator stops by SLEEP mode. Setting it to 0 continues the operating set by OSC1EN/CLG_CTL in SLEEP mode.

1 (R/W): Enabled (on) (default)

0 (R/W): Disabled (off)

D4 OSC3SLPEN: OSC3 Clock Sleep Control Bit

Enables or disables OSC3 oscillator stops by SLEEP mode. Setting it to 0 continues the operating set by OSC3EN/CLG_CTL in SLEEP mode.

1 (R/W): Enabled (on) (default)

0 (R/W): Disabled (off)

D[3:2] Reserved

D[1:0] Reserved

FOUTA Control Register (CLG_FOUTA)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
FOUTA Control Register (CLG_FOUTA)	0x5064 (8 bits)	D7–6	–	reserved	–	–	–	0 when being read.
		D5–4	FOUTAD [1:0]	FOUTA clock division ratio select	FOUTAD[1:0] Division ratio	0x0	R/W	When the clock source is IOSC or OSC3
					0x3	reserved		
					0x2	1/4		
					0x1	1/2		
D3–2	FOUTASRC [1:0]	FOUTA clock source select	FOUTASRC[1:0] Clock source	0x0	R/W			
				0x3	reserved			
				0x2	OSC3			
				0x1	OSC1			
				0x0	IOSC			
		D1	–	reserved	–	–	–	0 when being read.
		D0	FOUTAE	FOUTA output enable	1 Enable 0 Disable	0	R/W	

D[7:6] Reserved

D[5:4] FOUTAD[1:0]: FOUTA Clock Division Ratio Select Bits

Selects the clock division ratio to set the FOUTA clock frequency when IOSC or OSC3 is used as the clock source.

Table 7.8.6 IOSC/OSC3 Division Ratio Selection

FOUTAD[1:0]	Division ratio
0x3	Reserved
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

When OSC1 is used as the clock source, FOUTAD[1:0] is ineffective and the OSC1 clock is output without frequency division.

D[3:2] FOUTASRC[1:0]: FOUTA Clock Source Select Bits

Selects the FOUTA clock source.

7 CLOCK GENERATOR (CLG)

Table 7.8.7 FOUTA Clock Source Selection

FOUTASRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

D1 Reserved

D0 **FOUTAE: FOUTA Output Enable Bit**

Enables or disables FOUTA clock external output.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

Setting FOUTAE to 1 outputs the FOUTA clock from the FOUTA pin. Setting it to 0 stops the output.

FOUTB Control Register (CLG_FOUTB)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
FOUTB Control Register (CLG_FOUTB)	0x5065 (8 bits)	D7-6	—	reserved	—	—	—	0 when being read.	
		D5-4	FOUTBD [1:0]	FOUTB clock division ratio select	FOUTBD[1:0]	Division ratio	0x0	R/W	When the clock source is IOSC or OSC3
					0x3	reserved			
					0x2	1/4			
					0x1	1/2			
D3-2	FOUTBSRC [1:0]	FOUTB clock source select	FOUTBSRC[1:0]	Clock source	0x0	R/W			
			0x3	reserved					
			0x2	OSC3					
		0x1	OSC1						
		0x0	IOSC						
		D1	—	reserved	—	—	—	0 when being read.	
		D0	FOUTBE	FOUTB output enable	1 Enable 0 Disable	0	R/W		

D[7:6] Reserved

D[5:4] **FOUTBD[1:0]: FOUTB Clock Division Ratio Select Bits**

Selects the clock division ratio to set the FOUTB clock frequency when IOSC or OSC3 is used as the clock source.

Table 7.8.8 IOSC/OSC3 Division Ratio Selection

FOUTBD[1:0]	Division ratio
0x3	Reserved
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

When OSC1 is used as the clock source, FOUTBD[1:0] is ineffective and the OSC1 clock is output without frequency division.

D[3:2] **FOUTBSRC[1:0]: FOUTB Clock Source Select Bits**

Selects the FOUTB clock source.

Table 7.8.9 FOUTB Clock Source Selection

FOUTBSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

D1 Reserved

D0 **FOUTBE: FOUTB Output Enable Bit**

Enables or disables FOUTB clock external output.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

Setting FOUTBE to 1 outputs the FOUTB clock from the FOUTB pin. Setting it to 0 stops the output.

PCLK Control Register (CLG_PCLK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
PCLK Control Register (CLG_PCLK)	0x5080 (8 bits)	D7-2	-	reserved	-	-	-	0 when being read.	
		D1-0	PCKEN[1:0]	PCLK enable	PCKEN[1:0]	PCLK supply	0x3	R/W	
					0x3	Enable			
					0x2	Not allowed			
					0x1	Not allowed			
			0x0	Disable					

D[7:2] Reserved

D[1:0] PCKEN[1:0]: PCLK Enable Bits

Enables or disables clock (PCLK) supply to the internal peripheral modules.

Table 7.8.10 PCLK Control

PCKEN[1:0]	PCLK supply
0x3	Enabled (on)
0x2	Setting prohibited
0x1	Setting prohibited
0x0	Disabled (off)

(Default: 0x3)

The PCKEN[1:0] default setting is 0x3, which enables clock supply.

Peripheral modules that use PCLK

- UART Ch.0 and 1
- 16-bit timer Ch.0 to 4
- SPI Ch.0 to 2
- I²C master
- I²C slave
- Power generator
- P port & port MUX
- MISC registers
- IR remote controller
- A/D converter

The PCLK supply cannot be disabled if one or more peripheral modules in these list must be operated. The PCLK supply can be disabled if all the peripheral circuits in these list can be stopped.

Stop the PCLK supply to reduce current consumption if all the peripheral modules listed above are not required.

Peripheral modules/functions that do not use PCLK

- Clock timer
- Stopwatch timer
- Watchdog timer
- LCD driver
- Supply voltage detector
- Real-time clock
- Sound generator
- R/F converter
- 16-bit PWM timer Ch.0 to 3
- FOUTA/FOUTB outputs

These peripheral modules/functions can operate even if PCLK is stopped.

Note: Do not set PCKEN[1:0] to 0x2 or 0x1, since doing so will stop the operation of certain peripheral modules.

CCLK Control Register (CLG_CCLK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
CCLK Control Register (CLG_CCLK)	0x5081 (8 bits)	D7-2	--	reserved	--	--	--	0 when being read.	
		D1-0	CCLKGR[1:0]	CCLK clock gear ratio select	CCLKGR[1:0] Gear ratio	0x0	R/W		
					0x3	1/8			
					0x2	1/4			
					0x1	1/2			
				0x0	1/1				

D[7:2] Reserved**D[1:0] CCLKGR[1:0]: CCLK Clock Gear Ratio Select Bits**

Selects the gear ratio for reducing system clock speed and sets the CCLK clock speed for operating the S1C17 Core. To reduce current consumption, operate the S1C17 Core using the slowest possible clock speed.

Table 7.8.11 CCLK Gear Ratio Selection

CCLKGR[1:0]	Gear ratio
0x3	1/8
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

8 I/O Ports (P)

8.1 P Module Overview

The P ports are general-purpose digital inputs/outputs that allow software to control the input/output direction, pull-up resistor, and input interface level. These ports are shared with internal peripheral module inputs/outputs, and the pin functions can be switched by setting the registers. A number of port groups can generate interrupts caused by a transition of the input signal.

The following shows the features of the P module:

- Maximum 34 I/O ports (P0[7:0], P1[7:0], P2[7:0], P3[7:0], P4[1:0]) are available.
*The number of ports for general-purpose use depends on the peripheral functions used.
- Each port has a pull-up resistor that can be enabled with software.
- Supports two input interface levels selectable with software: CMOS Schmitt level or CMOS level
- The P0 to P3 ports can generate input interrupts at the signal edge selected with software.
- The P0 to P3 ports include a chattering filter.
- Can generate an initial reset by entering low level simultaneously to the P0 ports selected with software.
- All port provide a port function select bit to configure the pin function (for GPIO or peripheral functions).

Figure 8.1.1 shows the I/O port configuration.

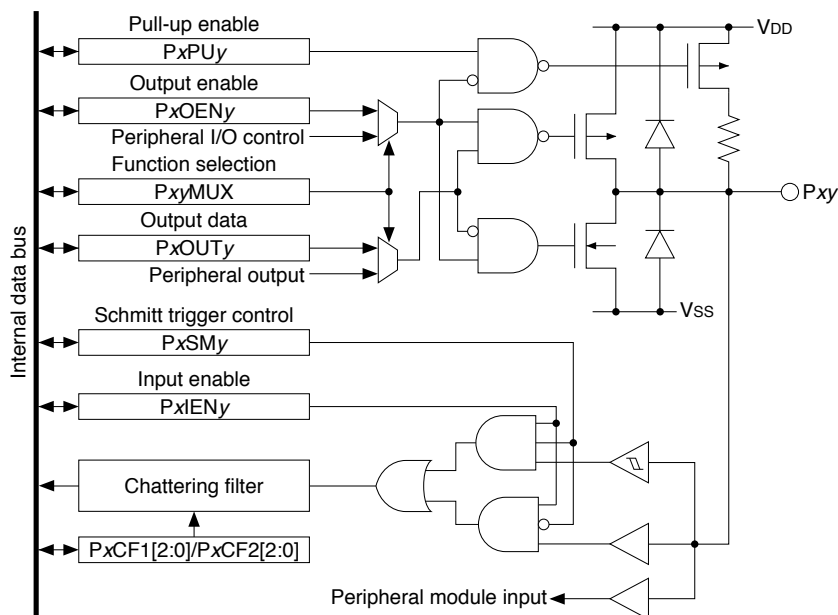


Figure 8.1.1 I/O Port Configuration

- Notes:**
- The PCLK clock must be supplied from the clock generator to access the I/O port. The PCLK clock is also needed to operate the P0–P3 chattering filters.
 - The “xy” in the register and bit names refers to the port number (Pxy, x = 0 to 4, y = 0 to 7).
Example: PxINy/Px_IN register
P00: P0IN0/P0_IN register
P17: P1IN7/P1_IN register

8.2 Input/Output Pin Function Selection (Port MUX)

The I/O port pins share peripheral module input/output pins. Each pin can be configured for use as an I/O port or for a peripheral module function via the corresponding port function-select bits. Pins not used for peripheral modules can be used as general-purpose I/O ports.

Table 8.2.1 Input/Output Pin Function Selection

Pin function 1 P _{xy} MUX[1:0] = 0x0	Pin function 2 P _{xy} MUX[1:0] = 0x1	Pin function 3 P _{xy} MUX[1:0] = 0x2	Pin function 4 P _{xy} MUX[1:0] = 0x3	Port function select bits
P00/EXCL1 (T16A)	REMO (REMC)	SCLK0 (UART)	–	P00MUX[1:0]/P00_03PMUX register
P01/EXCL2 (T16A)	REMI (REMC)	SCLK1 (UART)	–	P01MUX[1:0]/P00_03PMUX register
P02	TOUT6/CAP6 (T16A2)	–	–	P02MUX[1:0]/P00_03PMUX register
P03/EXCL0 (T16A)	#ADTRG (ADC10)	–	–	P03MUX[1:0]/P00_03PMUX register
P04	SPICLK0 (SPI)	–	–	P04MUX[1:0]/P04_07PMUX register
P05	SDO0 (SPI)	–	–	P05MUX[1:0]/P04_07PMUX register
P06	SDI0 (SPI)	–	–	P06MUX[1:0]/P04_07PMUX register
P07	#SPISS0 (SPI)	–	–	P07MUX[1:0]/P04_07PMUX register
P10	SPICLK1 (SPI)	–	–	P10MUX[1:0]/P10_13PMUX register
P11	SOUT0 (UART)	SDO1 (SPI)	–	P11MUX[1:0]/P10_13PMUX register
P12	SIN0 (UART)	SDI1 (SPI)	–	P12MUX[1:0]/P10_13PMUX register
P13	TOUT3/CAP3 (T16A2)	AIN7 (ADC10)	SDO2 (SPI)	P13MUX[1:0]/P10_13PMUX register
P14	TOUT4/CAP4 (T16A2)	AIN6 (ADC10)	SDI2 (SPI)	P14MUX[1:0]/P14_17PMUX register
P15	TOUT5/CAP5 (T16A2)	AIN5 (ADC10)	FOUTA (CLG)	P15MUX[1:0]/P14_17PMUX register
P16	TOUT2/CAP2 (T16A2)	AIN4 (ADC10)	–	P16MUX[1:0]/P14_17PMUX register
P17	TOUT1/CAP1 (T16A2)	AIN3 (ADC10)	–	P17MUX[1:0]/P14_17PMUX register
P20	AIN2 (ADC10)	SPICLK2 (SPI)	–	P20MUX[1:0]/P20_23PMUX register
P21	AIN1 (ADC10)	#SPISS1 (SPI)	–	P21MUX[1:0]/P20_23PMUX register
P22	AIN0 (ADC10)	#SPISS2 (SPI)	–	P22MUX[1:0]/P20_23PMUX register
P23/EXCL3 (T16A)	SENB1 (RFC)	–	–	P23MUX[1:0]/P20_23PMUX register
P24	SENA1 (RFC)	–	–	P24MUX[1:0]/P24_27PMUX register
P25	REF1 (RFC)	–	–	P25MUX[1:0]/P24_27PMUX register
P26	RFIN1 (RFC)	–	–	P26MUX[1:0]/P24_27PMUX register
P27	RFIN0 (RFC)	SOUT1 (UART)	–	P27MUX[1:0]/P24_27PMUX register
P30	REF0 (RFC)	SIN1 (UART)	–	P30MUX[1:0]/P30_33PMUX register
P31	SENA0 (RFC)	SCL0 (I2CM)	–	P31MUX[1:0]/P30_33PMUX register
P32	SENB0 (RFC)	SDA0 (I2CM)	–	P32MUX[1:0]/P30_33PMUX register
P33	SCL1 (I2CS)	SCL0 (I2CM)	–	P33MUX[1:0]/P30_33PMUX register
P34	SDA1 (I2CS)	SDA0 (I2CM)	–	P34MUX[1:0]/P34_37PMUX register
P35	FOUTB (CLG)	#BFR (I2CS)	#BZOUT	P35MUX[1:0]/P34_37PMUX register
P36	TOUT7/CAP7 (T16A2)	EXOSC3 (CLG)	BZOUT	P36MUX[1:0]/P34_37PMUX register
P37	TOUT0/CAP0 (T16A2)	LFRO (LCD32A)	RFCLKO (RFC)	P37MUX[1:0]/P34_37PMUX register
DSIO (DBG)	P40	–	–	P40MUX[1:0]/P40_42PMUX register
DST2 (DBG)	P41	–	–	P41MUX[1:0]/P40_42PMUX register
DCLK (DBG)		–	–	P42MUX[1:0]/P40_42PMUX register

At initial reset, each I/O port pin (P_{xy}) is initialized for the default function (“Pin function 1” in Table 8.2.1).

Pins P00, P01, P03, and P23 can also be used as 16-bit PWM timer external clock input pins by setting them to input mode. However, general-purpose input port function is also effective in this case.

For information on functions other than the I/O ports, see the descriptions of the peripheral modules indicated in parentheses. The sections below describe port functions with the pins set as general-purpose I/O ports.

8.3 Data Input/Output

Data input/output control

The I/O ports allow selection of the data input/output direction for each bit using P_xOEN_y/P_x_OEN register and P_xIEN_y/P_x_IEN register. P_xOEN_y enables and disables data output, while P_xIEN_y enables and disables data input.

Table 8.3.1 Data Input/Output Status

PxOENy output control	PxIENy input control	PxPUy pull-up control	Port status
0	1	0	Functions as an input port (pull-up off). The port pin (external input signal) value can be read out from PxINy (input data). Output is disabled.
0	1	1	Functions as an input port (pull-up on). (Default) The port pin (external input signal) value can be read out from PxINy (input data). Output is disabled.
1	0	1 or 0	Functions as an output port (pull-up off). Input is disabled. The value read from PxINy (input data) is 0.
1	1	1 or 0	Functions as an output port (pull-up off). Input is also enabled. The port pin value (output value) can be read out from PxINy (input data).
0	0	0	The pin is placed into high-impedance status (pull-up off). Output and input are both disabled. The value read from PxINy (input data) is 0.
0	0	1	The pin is placed into high-impedance status (pull-up on). Output and input are both disabled. The value read from PxINy (input data) is 0.

The input/output direction of ports with a peripheral module function selected is controlled by the peripheral module. PxOENy and PxIENy settings are ignored.

Data input

To input the port pin status and read out the value, enable input by setting PxIENy to 1 (default).

To input an external signal, PxOENy should also be set to 0 (default). The I/O port is placed into high-impedance status and it functions as an input port (input mode). The port is pulled up if pull-up is enabled by PxPUy/Px_PU register.

In input mode, the input pin status can be read out directly from PxINy/Px_IN register. The value read will be 1 when the input pin is at High (VDD) level and 0 when it is at Low (Vss) level.

The port pin status is always input when PxIENy is 1, even if output is enabled (PxOENy = 1) (output mode). In this case, the value actually output from the port can be read out from PxINy.

When PxIENy is set to 0, input is disabled, and 0 will be read out from PxINy.

Data output

To output data from the port pin, enable output by setting PxOENy to 1 (set to output mode). The I/O port then functions as an output port, and the value set in the PxOUTy/Px_OUT register is output from the port pin. The port pin outputs High (VDD) level when PxOUTy is set to 1 and Low (Vss) level when set to 0. Note that the port will not be pulled up in output mode, even if pull-up is enabled by PxPUy.

Writing to PxOUTy is possible without affecting pin status, even in input mode.

8.4 Pull-up Control

The I/O port contains a pull-up resistor that can be enabled or disabled individually for each bit using PxPUy/Px_PU register. Setting PxPUy to 1 (default) enables the pull-up resistor and pulls up the port pin in input mode. It will not be pulled up if set to 0. The PxPUy setting is ignored and not pulled up in output mode, regardless of how the PxIENy is set.

I/O ports that are not used should be set with pull-up enabled.

This pull-up setting is also enabled for ports for which the peripheral module function has been selected.

A delay will occur in the waveform rising edge depending on time constants such as pull-up resistance and pin load capacitance if the port pin is switched from Low level to High level through the internal pull-up resistor. An appropriate wait time must be set for the I/O port loading. The wait time set should be a value not less than that calculated from the following equation.

$$\text{Wait time} = R_{IN} \times (C_{IN} + \text{load capacitance on board}) \times 1.6 \text{ [s]}$$

R_{IN} : pull-up resistance maximum value, C_{IN} : pin capacitance maximum value

8.5 Input Interface Level

The I/O port input interface level can be selected individually for each bit using P_xSM_y/P_x_SM register. Setting P_xSM_y to 1 (default) selects CMOS Schmitt level; setting to 0 selects CMOS level.

8.6 P0–P3 Port Chattering Filter Function

The P0 to P3 ports include a chattering filter circuit for key entry that can be disabled or enabled with a check time specified individually for the four P_x[3:0] and P_x[7:4] ports using P_xCF1[2:0]/P_x_CHAT register and P_xCF2[2:0]/P_x_CHAT register, respectively.

Table 8.6.1 Chattering Filter Function Settings

P _x CF1[2:0]/P _x CF2[2:0]	Check time *
0x7	16384/fPCLK (8 ms)
0x6	8192/fPCLK (4 ms)
0x5	4096/fPCLK (2 ms)
0x4	2048/fPCLK (1 ms)
0x3	1024/fPCLK (512 μs)
0x2	512/fPCLK (256 μs)
0x1	256/fPCLK (128 μs)
0x0	No check time (off)

(Default: 0x0, * when PCLK = 2 MHz)

- Notes:**
- The chattering filter check time refers to the maximum pulse width that can be filtered. Generating an input interrupt requires a minimum input time of the check time and a maximum input time of twice the check time.
 - The P_x port interrupt must be disabled before setting the P_x_CHAT register. Setting the register while the interrupt is enabled may generate inadvertent P_x port interrupt. Also the chattering filter circuit requires a maximum of twice the check time for stabilizing the operation status. Before enabling the interrupt, make sure that the stabilization time has elapsed.
 - An unexpected interrupt may occur after SLEEP status is canceled if the `s1p` instruction is executed while the chattering filter function is enabled. The chattering filter must be disabled before placing the CPU into SLEEP status.

8.7 Port Input Interrupt

The P0 to P3 ports include input interrupt functions.

Select which of the 32 ports are to be used for interrupts based on requirements. You can also select whether interrupts are generated for either the rising edge or falling edge of the input signals.

Figure 8.7.1 shows the port input interrupt circuit configuration.

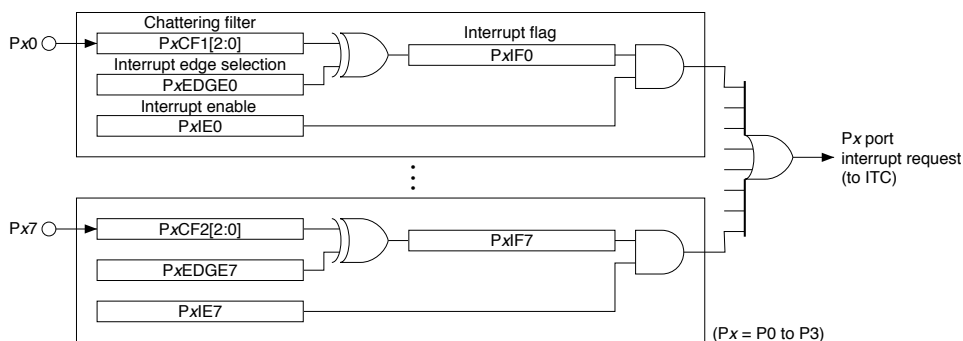


Figure 8.7.1 Port Input Interrupt Circuit Configuration

Interrupt port selection

Select the port generating an interrupt using PxIEy/Px_IMSK register.

Setting PxIEy to 1 enables interrupt generation by the corresponding port. Setting to 0 (default) disables interrupt generation.

Interrupt edge selection

Port input interrupts can be generated at either the rising edge or falling edge of the input signal. Select the edge used to generate interrupts using PxEDGEy/Px_EDGE register.

Setting PxEDGEy to 1 generates port input interrupts at the input signal falling edge. Setting it to 0 (default) generates interrupts at the rising edge.

Interrupt flags

The ITC is able to accept four interrupt requests from the P0, P1, P2, and P3 ports, and the P port module contains interrupt flags PxIFy/Px_IFLG register corresponding to the individual 32 ports to enable individual control of the 32 Pxy port interrupts. PxIFy is set to 1 at the specified edge (rising or falling edge) of the input signal. If the corresponding PxIEy has been set to 1, an interrupt request signal is also output to the ITC at the same time. An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied.

PxIFy is reset by writing 1.

For specific information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- The P port module interrupt flag PxIFy must be reset in the interrupt handler routine after a port interrupt has occurred to prevent recurring interrupts.
 - To prevent generating unnecessary interrupts, reset the relevant PxIFy before enabling interrupts for the required port using PxIEy.

8.8 P0 Port Key-Entry Reset

Entering low level simultaneously to the ports (P00–P03) selected with software triggers an initial reset. The ports used for the reset function can be selected with the P0KRST[1:0]/P0_KRST register.

Table 8.8.1 Configuration of P0 Port Key-Entry Reset

P0KRST[1:0]	Port used for resetting
0x3	P00, P01, P02, P03
0x2	P00, P01, P02
0x1	P00, P01
0x0	Not used

(Default: 0x0)

For example, if P0KRST[1:0] is set to 0x3, an initial reset will take place when the four ports P00–P03 are set to low level at the same time.

Note: The P0 port key-entry reset function cannot be used for power-on reset as it must be enabled with software.

8.9 Control Register Details

Table 8.9.1 List of I/O Port Control Registers

Address	Register name		Function
0x5200	P0_IN	P0 Port Input Data Register	P0 port input data
0x5201	P0_OUT	P0 Port Output Data Register	P0 port output data
0x5202	P0_OEN	P0 Port Output Enable Register	Enables P0 port outputs.
0x5203	P0_PU	P0 Port Pull-up Control Register	Controls the P0 port pull-up resistor.
0x5204	P0_SM	P0 Port Schmitt Trigger Control Register	Controls the P0 port Schmitt trigger input.
0x5205	P0_IMSK	P0 Port Interrupt Mask Register	Enables P0 port interrupts.
0x5206	P0_EDGE	P0 Port Interrupt Edge Select Register	Selects the signal edge for generating P0 port interrupts.
0x5207	P0_IFLG	P0 Port Interrupt Flag Register	Indicates/resets the P0 port interrupt occurrence status.
0x5208	P0_CHAT	P0 Port Chattering Filter Control Register	Controls the P0 port chattering filter.
0x5209	P0_KRST	P0 Port Key-Entry Reset Configuration Register	Configures the P0 port key-entry reset function.
0x520a	P0_IEN	P0 Port Input Enable Register	Enables P0 port inputs.
0x5210	P1_IN	P1 Port Input Data Register	P1 port input data
0x5211	P1_OUT	P1 Port Output Data Register	P1 port output data
0x5212	P1_OEN	P1 Port Output Enable Register	Enables P1 port outputs.
0x5213	P1_PU	P1 Port Pull-up Control Register	Controls the P1 port pull-up resistor.
0x5214	P1_SM	P1 Port Schmitt Trigger Control Register	Controls the P1 port Schmitt trigger input.
0x5215	P1_IMSK	P1 Port Interrupt Mask Register	Enables P1 port interrupts.
0x5216	P1_EDGE	P1 Port Interrupt Edge Select Register	Selects the signal edge for generating P1 port interrupts.
0x5217	P1_IFLG	P1 Port Interrupt Flag Register	Indicates/resets the P1 port interrupt occurrence status.
0x5218	P1_CHAT	P1 Port Chattering Filter Control Register	Controls the P1 port chattering filter.
0x521a	P1_IEN	P1 Port Input Enable Register	Enables P1 port inputs.
0x5220	P2_IN	P2 Port Input Data Register	P2 port input data
0x5221	P2_OUT	P2 Port Output Data Register	P2 port output data
0x5222	P2_OEN	P2 Output Enable Register	Enables P2 port outputs.
0x5223	P2_PU	P2 Port Pull-up Control Register	Controls the P2 port pull-up resistor.
0x5224	P2_SM	P2 Port Schmitt Trigger Control Register	Controls the P2 port Schmitt trigger input.
0x5225	P2_IMSK	P2 Port Interrupt Mask Register	Enables P2 port interrupts.
0x5226	P2_EDGE	P2 Port Interrupt Edge Select Register	Selects the signal edge for generating P2 port interrupts.
0x5227	P2_IFLG	P2 Port Interrupt Flag Register	Indicates/resets the P2 port interrupt occurrence status.
0x5228	P2_CHAT	P2 Port Chattering Filter Control Register	Controls the P2 port chattering filter.
0x522a	P2_IEN	P2 Port Input Enable Register	Enables P2 port inputs.
0x5230	P3_IN	P3 Port Input Data Register	P3 port input data
0x5231	P3_OUT	P3 Port Output Data Register	P3 port output data
0x5232	P3_OEN	P3 Port Output Enable Register	Enables P3 port outputs.
0x5233	P3_PU	P3 Port Pull-up Control Register	Controls the P3 port pull-up resistor.
0x5234	P3_SM	P3 Port Schmitt Trigger Control Register	Controls the P3 port Schmitt trigger input.
0x5235	P3_IMSK	P3 Port Interrupt Mask Register	Enables P3 port interrupts.
0x5236	P3_EDGE	P3 Port Interrupt Edge Select Register	Selects the signal edge for generating P3 port interrupts.
0x5237	P3_IFLG	P3 Port Interrupt Flag Register	Indicates/resets the P3 port interrupt occurrence status.
0x5238	P3_CHAT	P3 Port Chattering Filter Control Register	Controls the P3 port chattering filter.
0x523a	P3_IEN	P3 Port Input Enable Register	Enables P3 port inputs.
0x5240	P4_IN	P4 Port Input Data Register	P4 port input data
0x5241	P4_OUT	P4 Port Output Data Register	P4 port output data
0x5242	P4_OEN	P4 Port Output Enable Register	Enables P4 port outputs.
0x5243	P4_PU	P4 Port Pull-up Control Register	Controls the P4 port pull-up resistor.
0x5244	P4_SM	P4 Port Schmitt Trigger Control Register	Controls the P4 port Schmitt trigger input.
0x524a	P4_IEN	P4 Port Input Enable Register	Enables P4 port inputs.
0x52a0	P00_03PMUX	P0[3:0] Port Function Select Register	Selects the P0[3:0] port functions.
0x52a1	P04_07PMUX	P0[7:4] Port Function Select Register	Selects the P0[7:4] port functions.
0x52a2	P10_13PMUX	P1[3:0] Port Function Select Register	Selects the P1[3:0] port functions.
0x52a3	P14_17PMUX	P1[7:4] Port Function Select Register	Selects the P1[7:4] port functions.
0x52a4	P20_23PMUX	P2[3:0] Port Function Select Register	Selects the P2[3:0] port functions.
0x52a5	P24_27PMUX	P2[7:4] Port Function Select Register	Selects the P2[7:4] port functions.
0x52a6	P30_33PMUX	P3[3:0] Port Function Select Register	Selects the P3[3:0] port functions.
0x52a7	P34_37PMUX	P3[7:4] Port Function Select Register	Selects the P3[7:4] port functions.
0x52a8	P40_42PMUX	P4[2:0] Port Function Select Register	Selects the P4[2:0] port functions.

The I/O port registers are described in detail below. These are 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

Px Port Input Data Registers (Px_IN)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks			
Px Port Input Data Register (Px_IN)	0x5200	D7-0	PxIN[7:0]	Px[7:0] port input data	1	1 (H)	0	0 (L)	×	R	
	0x5210										
	0x5220										
	0x5230										
	0x5240										
	(8 bits)										

Note: P4IN[1:0] only are available for the P4 ports. Other bits are reserved and always read as 0.

D[7:0] PxIN[7:0]: Px[7:0] Port Input Data Bits

The port pin status can be read out. (Default: P1x and P4x are external input status)

1 (R): High level

0 (R): Low level

PxINy corresponds directly to the Pxy pin. The pin voltage level can be read out when input is enabled (PxIENy = 1) (even if output is also enabled (PxOENy = 1)). The value read out will be 1 when the pin voltage is High and 0 when Low.

The value read out is 0 when input is disabled (PxIENy = 0).

Writing operations to the read-only PxINy is disabled.

Px Port Output Data Registers (Px_OUT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks			
Px Port Output Data Register (Px_OUT)	0x5201	D7-0	PxOUT[7:0]	Px[7:0] port output data	1	1 (H)	0	0 (L)	0	R/W	
	0x5211										
	0x5221										
	0x5231										
	0x5241										
	(8 bits)										

Note: P4OUT[1:0] only are available for the P4 ports. Other bits are reserved and always read as 0.

D[7:0] PxOUT[7:0]: Px[7:0] Port Output Data Bits

Sets the data to be output from the port pin.

1 (R/W): High level

0 (R/W): Low level (default)

PxOUTy corresponds directly to the Pxy pins. The data written will be output unchanged from the port pins when output is enabled (PxOENy = 1). The port pin will be High when the data bit is set to 1 and Low when set to 0.

Port data can also be written when output is disabled (PxOENy = 0) (the pin status is unaffected).

Px Port Output Enable Registers (Px_OEN)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks			
Px Port Output Enable Register (Px_OEN)	0x5202	D7-0	PxOEN[7:0]	Px[7:0] port output enable	1	Enable	0	Disable	0	R/W	
	0x5212										
	0x5222										
	0x5232										
	0x5242										
	(8 bits)										

Note: P4OEN[1:0] only are available for the P4 ports. Other bits are reserved and always read as 0.

D[7:0] PxOEN[7:0]: Px[7:0] Port Output Enable Bits

Enables or disables port outputs.

1 (R/W): Enabled

0 (R/W): Disabled (default)

PxOENy is the output enable bit that corresponds directly to Pxy port. Setting to 1 enables output and the data set in PxOUTy is output from the port pin. Output is disabled when PxOENy is set to 0, and the port pin is set into high-impedance status. The peripheral module determines whether output is enabled or disabled when the port is used for a peripheral module function.

Refer to Table 8.3.1 for more information on input/output status for ports, including settings other than for the PxOEN register.

Px Port Pull-up Control Registers (Px_PU)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks
Px Port Pull-up Control Register (Px_PU)	0x5203	D7-0	PxPU[7:0]	Px[7:0] port pull-up enable	1	Enable	0	Disable	P0x, P2x, and P3x are 0. P1x and P4x are 1. (0xf)
	0x5213								
	0x5223								
	0x5233								
	0x5243 (8 bits)								

Note: P4PU[1:0] only are available for the P4 ports. Other bits are reserved and always read as 0.

D[7:0] PxPU[7:0]: Px[7:0] Port Pull-up Enable Bits

Enables or disables the pull-up resistor included in each port.

1 (R/W): Enabled (default : P1x, P4x)

0 (R/W): Disabled (default : P0x, P2x, P3x)

PxPUy is the pull-up control bit that corresponds directly to the Pxy port. Setting to 1 enables the pull-up resistor and the port pin will be pulled up when output is disabled (PxOENy = 0). When PxPUy is set to 0, the pin will not be pulled up.

When output is enabled (PxOENy = 1), the PxPUy setting is ignored, and the pin is not pulled up.

I/O ports that are not used should be set with pull-up enabled.

This pull-up setting is also enabled for ports for which the peripheral module input function is selected.

Px Port Schmitt Trigger Control Registers (Px_SM)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks
Px Port Schmitt Trigger Control Register (Px_SM)	0x5204	D7-0	PxSM[7:0]	Px[7:0] port Schmitt trigger input enable	1	Enable (Schmitt)	0	Disable (CMOS)	1 (0xff)
	0x5214								
	0x5224								
	0x5234								
	0x5244 (8 bits)								

Note: P4SM[1:0] only are available for the P4 ports. Other bits are reserved and always read as 0.

D[7:0] PxSM[7:0]: Px[7:0] Port Schmitt Trigger Input Enable Bits

Enables or disables the Schmitt trigger input buffer for each port.

1 (R/W): Enable (Schmitt) (default)

0 (R/W): Disable (CMOS level)

PxSMy is the Schmitt input control bit that corresponds directly to the Pxy port. Setting to 1 enables the Schmitt input buffer, and setting to 0 uses the CMOS level input buffer.

However, P26 and P27 ports are always schmitt input.

Px Port Interrupt Mask Registers (Px_IMSK)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks
Px Port Interrupt Mask Register (Px_IMSK)	0x5205	D7-0	PxIE[7:0]	Px[7:0] port interrupt enable	1	Enable	0	Disable	0
	0x5215								
	0x5225								
	0x5235								
	(8 bits)								

Note: The P4_IMSK register (for P4 ports) is not provided.

D[7:0] PxIE[7:0]: Px[7:0] Port Interrupt Enable Bits

Enables or disables each port interrupt.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting PxIEy to 1 enables the corresponding Pxy port input interrupt, while setting to 0 disables the interrupt. Status changes for the input pins with interrupt disabled do not affect interrupt occurrence.

Px Port Interrupt Edge Select Registers (Px_EDGE)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks				
Px Port Interrupt Edge Select Register (Px_EDGE)	0x5206	D7-0	PxEDGE[7:0]	Px[7:0] port interrupt edge select	1	Falling edge	0	Rising edge	0	R/W		
	0x5216											
	0x5226											
	0x5236											
	(8 bits)											

Note: The P4_EDGE register (for P4 ports) is not provided.

D[7:0] PxEDGE[7:0]: Px[7:0] Port Interrupt Edge Select Bits

Selects the input signal edge for generating each port interrupt.

1 (R/W): Falling edge

0 (R/W): Rising edge (default)

Port interrupts are generated at the input signal falling edge when PxEDGEy is set to 1 and at the rising edge when set to 0.

Px Port Interrupt Flag Registers (Px_IFLG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks				
Px Port Interrupt Flag Register (Px_IFLG)	0x5207	D7-0	PxIF[7:0]	Px[7:0] port interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	Reset by writing 1.	
	0x5217											
	0x5227											
	0x5237											
	(8 bits)											

Note: The P4_IFLG register (for P4 ports) is not provided.

D[7:0] PxIF[7:0]: Px[7:0] Port Interrupt Flag Bits

These are interrupt flags indicating the interrupt cause occurrence status.

1 (R): Interrupt cause occurred

0 (R): No interrupt cause occurred (default)

1 (W): Reset flag

0 (W): Ignored

PxIFy is the interrupt flag corresponding to the individual 32 ports of P0 to P3 and is set to 1 at the specified edge (rising or falling edge) of the input signal. When the corresponding PxIEy/Px_IMSK register has been set to 1, a port interrupt request signal is also output to the ITC at the same time. An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied.

PxIFy is reset by writing 1.

- Notes:**
- The P port module interrupt flag PxIFy must be reset in the interrupt handler routine after a port interrupt has occurred to prevent recurring interrupts.
 - To prevent generating unnecessary interrupts, reset the relevant PxIFy before enabling interrupts for the required port using PxIEy/Px_IMSK register.

Px Port Chattering Filter Control Registers (Px_CHAT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Px Port Chattering Filter Control Register (Px_CHAT)	0x5208	D7	–	reserved	–	–	–	0 when being read.
	0x5218	D6–4	PxCF2[2:0]	Px[7:4] chattering filter time select	PxCF2[2:0]	Filter time	0x0	R/W
	0x5228				0x7	16384/fPCLK		
	0x5238 (8 bits)				0x6	8192/fPCLK		
					0x5	4096/fPCLK		
					0x4	2048/fPCLK		
					0x3	1024/fPCLK		
					0x2	512/fPCLK		
					0x1	256/fPCLK		
	0x0	None						
0x5208	D3	–	reserved	–	–	–	0 when being read.	
0x5218	D2–0	PxCF1[2:0]	Px[3:0] chattering filter time select	PxCF1[2:0]	Filter time	0x0	R/W	
0x5228				0x7	16384/fPCLK			
0x5238 (8 bits)				0x6	8192/fPCLK			
				0x5	4096/fPCLK			
				0x4	2048/fPCLK			
				0x3	1024/fPCLK			
				0x2	512/fPCLK			
				0x1	256/fPCLK			
0x0	None							

Note: The P4_CHAT register (for P4 ports) is not provided.

D7 **Reserved**

D[6:4] **PxCF2[2:0]: Px[7:4] Chattering Filter Time Select Bits**

Configures the chattering filter circuit for the Px[7:4] ports.

D3 **Reserved**

D[2:0] **PxCF1[2:0]: Px[3:0] Chattering Filter Time Select Bits**

Configures the chattering filter circuit for the Px[3:0] ports.

The P0 to P3 ports include a chattering filter circuit for key entry that can be disabled or enabled with a check time specified individually for the four Px[3:0] and Px[7:4] ports using PxCF1[2:0] and PxCF2[2:0], respectively.

Table 8.9.2 Chattering Filter Function Settings

PxCF1[2:0]/PxCF2[2:0]	Check time *
0x7	16384/fPCLK (8 ms)
0x6	8192/fPCLK (4 ms)
0x5	4096/fPCLK (2 ms)
0x4	2048/fPCLK (1 ms)
0x3	1024/fPCLK (512 μs)
0x2	512/fPCLK (256 μs)
0x1	256/fPCLK (128 μs)
0x0	No check time (off)

(Default: 0x0, * when PCLK = 2 MHz)

- Notes:**
- The chattering filter check time refers to the maximum pulse width that can be filtered. Generating an input interrupt requires a minimum input time of the check time and a maximum input time of twice the check time.
 - The Px port interrupt must be disabled before setting the Px_CHAT register. Setting the register while the interrupt is enabled may generate inadvertent Px interrupt. Also the chattering filter circuit requires a maximum of twice the check time for stabilizing the operation status. Before enabling the interrupt, make sure that the stabilization time has elapsed.
 - An unexpected interrupt may occur after SLEEP status is canceled if the `slp` instruction is executed while the chattering filter function is enabled. The chattering filter must be disabled before placing the CPU into SLEEP status.

P0 Port Key-Entry Reset Configuration Register (P0_KRST)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P0 Port Key-Entry Reset Configuration Register (P0_KRST)	0x5209 (8 bits)	D7-2	–	reserved	–	–	–	0 when being read.	
		D1-0	P0KRST[1:0]	P0 port key-entry reset configuration	P0KRST[1:0] Configuration	0x0	R/W		
					0x3	P0[3:0]			
					0x2	P0[2:0]			
					0x1	P0[1:0]			
				0x0	Disable				

D[7:2] Reserved

D[1:0] P0KRST[1:0]: P0 Port Key-Entry Reset Configuration Bits

Selects the port combination used for P0 port key-entry reset.

Table 8.9.3 P0 Port Key-Entry Reset Settings

P0KRST[1:0]	Ports used for resetting
0x3	P00, P01, P02, P03
0x2	P00, P01, P02
0x1	P00, P01
0x0	Not used

(Default: 0x0)

The key-entry reset function performs an initial reset by inputting Low level simultaneously to the ports selected here. For example, if P0KRST[1:0] is set to 0x3, an initial reset is performed when the four ports P00 to P03 are simultaneously set to Low level.

Set P0KRST[1:0] to 0x0 when this reset function is not used.

Note: The P0 port key-entry reset function is disabled at initial reset and cannot be used for power-on reset.

Px Port Input Enable Registers (Px_IEN)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Px Port Input Enable Register (Px_IEN)	0x520a 0x521a 0x522a 0x523a 0x524a (8 bits)	D7-0	PxIEN[7:0]	Px[7:0] port input enable	1 Enable 0 Disable	P0x, P2x and P3x are 0. P1x and P4x are 1. (0xff)	R/W	

Note: P4IEN[1:0] only are available for the P4 ports. Other bits are reserved and always read as 0.

D[7:0] PxIEN[7:0]: Px[7:0] Port Input Enable Bits

Enables or disables port inputs.

1 (R/W): Enable (default : P1x, P4x)

0 (R/W): Disable (default : P0x, P2x, P3x)

PxIENy is the input enable bit that corresponds directly to the Pxy port. Setting to 1 enables input and the corresponding port pin input or output signal level can be read out from the Px_IN register. Setting to 0 disables input.

Refer to Table 8.3.1 for more information on port input/output status, including settings other than for the Px_IEN register.

P0[3:0] Port Function Select Register (P00_03PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P0[3:0] Port Function Select Register (P00_03PMUX)	0x52a0 (8 bits)	D7-6	P03MUX[1:0]	P03 port function select	P03MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	#ADTRG			
		D5-4	P02MUX[1:0]	P02 port function select	P02MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	TOUT6/CAP6			
		D3-2	P01MUX[1:0]	P01 port function select	P01MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SCLK1			
					0x1	REMI			
D1-0	P00MUX[1:0]	P00 port function select	P00MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SCLK0					
			0x1	REMO					
					0x0				

The P00 to P03 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P03MUX[1:0]: P03 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): #ADTRG (ADC10)
- 0x0 (R/W): P03 port and EXCL0 (T16A2 Ch.0) (default)

To use the P03 pin for EXCL0 input, P0OEN3/P0_OEN register must be set to 0 and P0IEN3/P0_IEN register must be set to 1.

D[5:4] P02MUX[1:0]: P02 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): TOUT6 (T16A2 Ch.3 comparator mode) or CAP6 (T16A2 Ch.3 capture mode)
- 0x0 (R/W): P02 port (default)

D[3:2] P01MUX[1:0]: P01 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): SCLK1 (UART Ch.1)
- 0x1 (R/W): REMI (REMC)
- 0x0 (R/W): P01 port and EXCL2 (T16A2 Ch.2) (default)

To use the P01 pin for EXCL2 input, P0OEN1/P0_OEN register must be set to 0 and P0IEN1/P0_IEN register must be set to 1.

D[1:0] P00MUX[1:0]: P00 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): SCLK0 (UART Ch.0)
- 0x1 (R/W): REMO (REMC)
- 0x0 (R/W): P00 port and EXCL1 (T16A2 Ch.1) (default)

To use the P00 pin for EXCL1 input, P0OEN0/P0_OEN register must be set to 0 and P0IEN0/P0_IEN register must be set to 1.

P0[7:4] Port Function Select Register (P04_07PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P0[7:4] Port Function Select Register (P04_07PMUX)	0x52a1 (8 bits)	D7-6	P07MUX[1:0]	P07 port function select	P07MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	#SPISS0			
		0x0	P07						
		D5-4	P06MUX[1:0]	P06 port function select	P06MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	SDI0			
		0x0	P06						
		D3-2	P05MUX[1:0]	P05 port function select	P05MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	SDO0			
		0x0	P05						
		D1-0	P04MUX[1:0]	P04 port function select	P04MUX[1:0]	Function	0x0	R/W	
0x3	reserved								
0x2	reserved								
0x1	SPICLK0								
0x0	P04								

The P04 to P07 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P07MUX[1:0]: P07 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): #SPISS0 (SPI Ch.0)
- 0x0 (R/W): P07 port (default)

D[5:4] P06MUX[1:0]: P06 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): SDI0 (SPI Ch.0)
- 0x0 (R/W): P06 port (default)

D[3:2] P05MUX[1:0]: P05 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): SDO0 (SPI Ch.0)
- 0x0 (R/W): P05 port (default)

D[1:0] P04MUX[1:0]: P04 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): SPICLK0 (SPI Ch.0)
- 0x0 (R/W): P04 port (default)

P1[3:0] Port Function Select Register (P10_13PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P1[3:0] Port Function Select Register (P10_13PMUX)	0x52a2 (8 bits)	D7-6	P13MUX[1:0]	P13 port function select	P13MUX[1:0]	Function	0x0	R/W	
					0x3	SDO2			
					0x2	AIN7			
					0x1	TOUT3/CAP3			
		0x0	P13						
		D5-4	P12MUX[1:0]	P12 port function select	P12MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SDI1			
0x1	SIN0								
0x0	P12								
D3-2	P11MUX[1:0]	P11 port function select	P11MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SDO1					
			0x1	SOUT0					
0x0	P11								
D1-0	P10MUX[1:0]	P10 port function select	P10MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	reserved					
			0x1	SPICK1					
0x0	P10								

The P10 to P13 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P13MUX[1:0]: P13 Port Function Select Bits

0x3 (R/W): SDO2 (SPI Ch.2)

0x2 (R/W): AIN7 (ADC10)

0x1 (R/W): TOUT3 (T16A2 Ch.1 comparator mode) or CAP3 (T16A2 Ch.1 capture mode)

0x0 (R/W): P13 port (default)

D[5:4] P12MUX[1:0]: P12 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): SDI1 (SPI Ch.1)

0x1 (R/W): SIN0 (UART Ch.0)

0x0 (R/W): P12 port (default)

D[3:2] P11MUX[1:0]: P11 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): SDO1 (SPI Ch.1)

0x1 (R/W): SOUT0 (UART Ch.0)

0x0 (R/W): P11 port (default)

D[1:0] P10MUX[1:0]: P10 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): Reserved

0x1 (R/W): SPICK1 (SPI Ch.1)

0x0 (R/W): P10 port (default)

P1[7:4] Port Function Select Register (P14_17PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P1[7:4] Port Function Select Register (P14_17PMUX)	0x52a3 (8 bits)	D7-6	P17MUX[1:0]	P17 port function select	P17MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	AIN3			
					0x1	TOUT1/CAP1			
		0x0	P17						
		D5-4	P16MUX[1:0]	P16 port function select	P16MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	AIN4			
					0x1	TOUT2/CAP2			
		0x0	P16						
		D3-2	P15MUX[1:0]	P15 port function select	P15MUX[1:0]	Function	0x0	R/W	
					0x3	FOUTA			
					0x2	AIN5			
					0x1	TOUT5/CAP5			
		0x0	P15						
		D1-0	P14MUX[1:0]	P14 port function select	P14MUX[1:0]	Function	0x0	R/W	
0x3	SDI2								
0x2	AIN6								
0x1	TOUT4/CAP4								
0x0	P14								

The P14 to P17 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P17MUX[1:0]: P17 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): AIN3 (ADC10)

0x1 (R/W): TOUT1 (T16A2 Ch.0 comparator mode) or CAP1 (T16A2 Ch.0 capture mode)

0x0 (R/W): P17 port (default)

D[5:4] P16MUX[1:0]: P16 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): AIN4 (ADC10)

0x1 (R/W): TOUT2 (T16A2 Ch.1 comparator mode) or CAP2 (T16A2 Ch.1 capture mode)

0x0 (R/W): P16 port (default)

D[3:2] P15MUX[1:0]: P15 Port Function Select Bits

0x3 (R/W): FOUTA (CLG)

0x2 (R/W): AIN5 (ADC10)

0x1 (R/W): TOUT5 (T16A2 Ch.2 comparator mode) or CAP5 (T16A2 Ch.2 capture mode)

0x0 (R/W): P15 port (default)

D[1:0] P14MUX[1:0]: P14 Port Function Select Bits

0x3 (R/W): SDI2 (SPI Ch.2)

0x2 (R/W): AIN6 (ADC10)

0x1 (R/W): TOUT4 (T16A2 Ch.2 comparator mode) or CAP4 (T16A2 Ch.2 capture mode)

0x0 (R/W): P14 port (default)

P2[3:0] Port Function Select Register (P20_23PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P2[3:0] Port Function Select Register (P20_23PMUX)	0x52a4 (8 bits)	D7-6	P23MUX[1:0]	P23 port function select	P23MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	SENB1			
		0x0	P23/EXCL3						
		D5-4	P22MUX[1:0]	P22 port function select	P22MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	#SPISS2			
					0x1	AIN0			
		0x0	P22						
		D3-2	P21MUX[1:0]	P21 port function select	P21MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	#SPISS1			
					0x1	AIN1			
		0x0	P21						
		D1-0	P20MUX[1:0]	P20 port function select	P20MUX[1:0]	Function	0x0	R/W	
0x3	reserved								
0x2	SPICLK2								
0x1	AIN2								
0x0	P20								

The P20 to P23 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P23MUX[1:0]: P23 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): Reserved

0x1 (R/W): SENB1 (RFC Ch.1)

0x0 (R/W): P23 port and EXCL3 (T16A2 Ch.3) (default)

To use the P23 pin for EXCL3 input, P2OEN3/P2_OEN register must be set to 0 and P2IEN3/P2_IEN register must be set to 1.

D[5:4] P22MUX[1:0]: P22 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): #SPISS2 (SPI Ch.2)

0x1 (R/W): AIN0 (ADC10)

0x0 (R/W): P22 port (default)

D[3:2] P21MUX[1:0]: P21 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): #SPISS1 (SPI Ch.1)

0x1 (R/W): AIN1 (ADC10)

0x0 (R/W): P21 port (default)

D[1:0] P20MUX[1:0]: P20 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): SPICLK2 (SPI Ch.2)

0x1 (R/W): AIN2 (ADC10)

0x0 (R/W): P20 port (default)

P2[7:4] Port Function Select Register (P24_27PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P2[7:4] Port Function Select Register (P24_27PMUX)	0x52a5 (8 bits)	D7-6	P27MUX[1:0]	P27 port function select	P27MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SOUT1			
					0x1	RFIN0			
		0x0	P27						
		D5-4	P26MUX[1:0]	P26 port function select	P26MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	RFIN1			
		0x0	P26						
		D3-2	P25MUX[1:0]	P25 port function select	P25MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	REF1			
		0x0	P25						
		D1-0	P24MUX[1:0]	P24 port function select	P24MUX[1:0]	Function	0x0	R/W	
0x3	reserved								
0x2	reserved								
0x1	SENA1								
0x0	P24								

The P24 to P27 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P27MUX[1:0]: P27 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): SOUT1 (UART Ch.1)
- 0x1 (R/W): RFIN0 (RFC Ch.0)
- 0x0 (R/W): P27 port (default)

D[5:4] P26MUX[1:0]: P26 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): RFIN1 (RFC Ch.1)
- 0x0 (R/W): P26 port (default)

D[3:2] P25MUX[1:0]: P25 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): REF1 (RFC Ch.1)
- 0x0 (R/W): P25 port (default)

D[1:0] P24MUX[1:0]: P24 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): SENA1 (RFC Ch.1)
- 0x0 (R/W): P24 port (default)

P3[3:0] Port Function Select Register (P30_33PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P3[3:0] Port Function Select Register (P30_33PMUX)	0x52a6 (8 bits)	D7-6	P33MUX[1:0]	P33 port function select	P33MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SCL0			
					0x1	SCL1			
		0x0	P33						
		D5-4	P32MUX[1:0]	P32 port function select	P32MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SDA0			
0x1	SENB0								
0x0	P32								
D3-2	P31MUX[1:0]	P31 port function select	P31MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SCL0					
			0x1	SENA0					
0x0	P31								
D1-0	P30MUX[1:0]	P30 port function select	P30MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SIN1					
			0x1	REF0					
0x0	P30								

The P30 to P33 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P33MUX[1:0]: P33 Port Function Select Bits

0x3 (R/W): Reserved
 0x2 (R/W): SCL0 (I2CM)
 0x1 (R/W): SCL1 (I2CS)
 0x0 (R/W): P33 port (default)

D[5:4] P32MUX[1:0]: P32 Port Function Select Bits

0x3 (R/W): Reserved
 0x2 (R/W): SDA0 (I2CM)
 0x1 (R/W): SENB0 (RFC Ch.0)
 0x0 (R/W): P32 port (default)

D[3:2] P31MUX[1:0]: P31 Port Function Select Bits

0x3 (R/W): Reserved
 0x2 (R/W): SCL0 (I2CM)
 0x1 (R/W): SENA0 (RFC Ch.0)
 0x0 (R/W): P31 port (default)

D[1:0] P30MUX[1:0]: P30 Port Function Select Bits

0x3 (R/W): Reserved
 0x2 (R/W): SIN1 (UART Ch.1)
 0x1 (R/W): REF0 (RFC Ch.0)
 0x0 (R/W): P30 port (default)

P3[7:4] Port Function Select Register (P34_37PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P3[7:4] Port Function Select Register (P34_37PMUX)	0x52a7 (8 bits)	D7-6	P37MUX[1:0]	P37 port function select	P37MUX[1:0]	Function	0x0	R/W	
					0x3	RFCLKO			
					0x2	LFRO			
					0x1	TOUT0/CAP0			
		0x0	P37						
		D5-4	P36MUX[1:0]	P36 port function select	P36MUX[1:0]	Function	0x0	R/W	
					0x3	BZOUT			
					0x2	EXOSC3			
					0x1	TOUT7/CAP7			
		0x0	P36						
		D3-2	P35MUX[1:0]	P35 port function select	P35MUX[1:0]	Function	0x0	R/W	
					0x3	#BZOUT			
					0x2	#BFR			
					0x1	FOUTB			
		0x0	P35						
		D1-0	P34MUX[1:0]	P34 port function select	P34MUX[1:0]	Function	0x0	R/W	
0x3	reserved								
0x2	SDA0								
0x1	SDA1								
0x0	P34								

The P34 to P37 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] P37MUX[1:0]: P37 Port Function Select Bits

0x3 (R/W): RFCLKO (RFC)

0x2 (R/W): LFRO (LCD32A)

0x1 (R/W): TOUT0 (T16A2 Ch.0 comparator mode) or CAP0 (T16A2 Ch.0 capture mode)

0x0 (R/W): P37 port (default)

D[5:4] P36MUX[1:0]: P36 Port Function Select Bits

0x3 (R/W): BZOUT (SND)

0x2 (R/W): EXOSC3 (CLG)

0x1 (R/W): TOUT7 (T16A2 Ch.3 comparator mode) or CAP7 (T16A2 Ch.3 capture mode)

0x0 (R/W): P36 port (default)

D[3:2] P35MUX[1:0]: P35 Port Function Select Bits

0x3 (R/W): #BZOUT (SND)

0x2 (R/W): #BFR (I2CS)

0x1 (R/W): FOUTB (CLG)

0x0 (R/W): P35 port (default)

D[1:0] P34MUX[1:0]: P34 Port Function Select Bits

0x3 (R/W): Reserved

0x2 (R/W): SDA0 (I2CM)

0x1 (R/W): SDA1 (I2CS)

0x0 (R/W): P34 port (default)

P4[2:0] Port Function Select Register (P40_42PMUX)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P4[2:0] Port Function Select Register (P40_42PMUX)	0x52a8 (8 bits)	D7-6	--		reserved	--	--	0 when being read.	
		D5-4	P42MUX[1:0]	P42 port function select	P42MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	reserved			
		D3-2	P41MUX[1:0]	P41 port function select	P41MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	P41			
		D1-0	P40MUX[1:0]	P40 port function select	P40MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
0x1	P40								
					0x0		DSIO		

The P40 to P42 port pins are shared with the peripheral module pins. This register is used to select how the pins are used.

D[7:6] Reserved**D[5:4] P42MUX[1:0]: P42 Port Function Select Bits**

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): Reserved
- 0x0 (R/W): DCLK (DBG) (default)

D[3:2] P41MUX[1:0]: P41 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): P41 port
- 0x0 (R/W): DST2 (DBG) (default)

D[1:0] P40MUX[1:0]: P40 Port Function Select Bits

- 0x3 (R/W): Reserved
- 0x2 (R/W): Reserved
- 0x1 (R/W): P40 port
- 0x0 (R/W): DSIO (DBG) (default)

9 16-bit Timers (T16)

9.1 T16 Module Overview

The S1C17706 includes five-channel 16-bit timer module (T16).

The features of the T16 module are listed below.

- 16-bit presetable down counter with a 16-bit reload data register for setting the preset value
- Generates the SPI, I²C master operating clocks and A/D conversion trigger signal from the counter underflow signals.
- Generates underflow interrupt signals to the interrupt controller (ITC).
- Any desired time intervals and serial transfer rates can be programmed by selecting an appropriate count clock and preset value.

Figure 9.1.1 shows the T16 configuration.

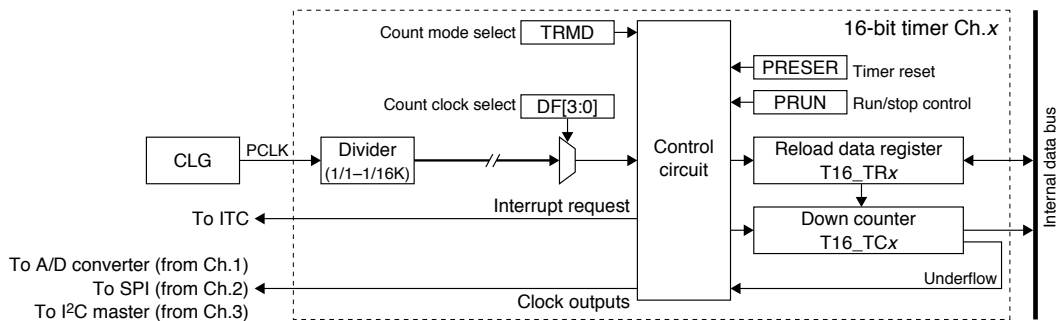


Figure 9.1.1 T16 Configuration (1 Channel)

Each channel of the T16 module consists of a 16-bit presetable down counter and a 16-bit reload data register holding the preset value. The timer counts down from the initial value set in the reload data register and outputs an underflow signal when the counter underflows. The underflow signal is used to generate an interrupt and an internal serial interface clock or an A/D converter trigger signal. The underflow cycle can be programmed by selecting the count clock and reload data, enabling the application program to obtain time intervals and serial transfer rates as required.

Note: All five T16 channels have the same functions except for the control register addresses. The description in this chapter applies to all channels. The 'x' in the register name refers to the channel number (0 to 4).

Example: T16_CTLx register

- Ch.0: T16_CTL0 register
- Ch.1: T16_CTL1 register
- Ch.2: T16_CTL2 register
- Ch.3: T16_CTL3 register
- Ch.4: T16_CTL4 register

9.2 Count Clock

The count clock is generated by dividing the PCLK clock into 1/1 to 1/16K. The division ratio can be selected from the 15 types shown below using DF[3:0]/T16_CLKx register.

Table 9.2.1 PCLK Division Ratio Selection

DF[3:0]	Division ratio	DF[3:0]	Division ratio
0xf	Reserved	0x7	1/128
0xe	1/16384	0x6	1/64
0xd	1/8192	0x5	1/32
0xc	1/4096	0x4	1/16
0xb	1/2048	0x3	1/8
0xa	1/1024	0x2	1/4
0x9	1/512	0x1	1/2
0x8	1/256	0x0	1/1

(Default: 0x0)

- Notes:**
- The clock generator (CLG) must be configured to supply PCLK to the peripheral modules before running the timer.
 - Make sure the counter is halted before setting the count clock.

For detailed information on the CLG control, see the “Clock Generator (CLG)” chapter.

9.3 Count Mode

The T16 module features two count modes: repeat mode and one-shot mode. These modes are selected using TRMD/T16_CTLx register.

Repeat mode (TRMD = 0, default)

Setting TRMD to 0 sets T16 to repeat mode.

In this mode, once the count starts, the timer continues running until stopped by the application program. When the counter underflows, the timer presets the reload data register value into the counter and continues the count. Thus, the timer periodically outputs an underflow pulse. T16 should be set to this mode to generate periodic interrupts or A/D conversion triggers at desired intervals or to generate a serial transfer clock.

One-shot mode (TRMD = 1)

Setting TRMD to 1 sets T16 to one-shot mode.

In this mode, the timer stops automatically as soon as the counter underflows. This means only one interrupt can be generated after the timer starts. Note that the timer presets the reload data register value to the counter, then stops after an underflow has occurred. T16 should be set to this mode to set a specific wait time.

9.4 Reload Data Register and Underflow Cycle

The reload data register T16_TRx is used to set the initial value for the down counter.

The initial counter value set in the reload data register is preset to the down counter if the timer is reset or the counter underflows. If the timer is started after resetting, it counts down from the reload value (initial value). This means that the reload value and the input clock frequency determine the time elapsed from the point at which the timer starts until the underflow occurs (or between underflows). The time determined is used to obtain the specified wait time, the intervals between periodic interrupts or A/D conversion triggers, and the programmable serial interface transfer clock.

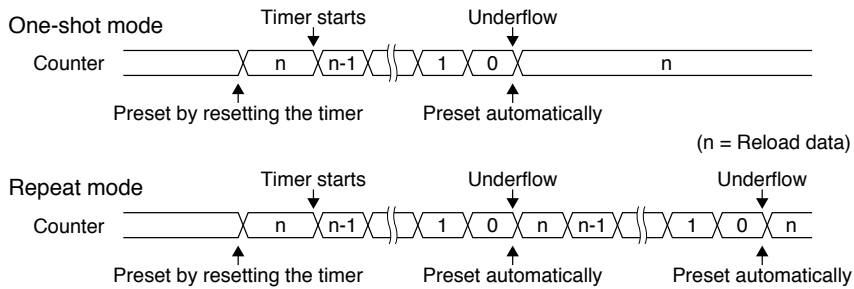


Figure 9.4.1 Preset Timing

The underflow cycle can be calculated as follows:

$$\text{Underflow interval} = \frac{TR + 1}{ct_clk} \text{ [s]} \quad \text{Underflow cycle} = \frac{ct_clk}{TR + 1} \text{ [Hz]}$$

ct_clk: Count clock frequency [Hz]

TR: Reload data (0–65535)

9.5 Timer Reset

The timer is reset by writing 1 to PRESER/T16_CTLx register. The reload data is preset and the counter is initialized.

9.6 Timer RUN/STOP Control

Make the following settings before starting the timer.

- (1) Select the count clock. See Section 9.2.
- (2) Set the count mode (one-shot or repeat). See Section 9.3.
- (3) Calculate the initial counter value and set it to the reload data register. See Section 9.4.
- (4) Reset the timer to preset the counter to the initial value. See Section 9.5.
- (5) When using timer interrupts, set the interrupt level and enable interrupts for the relevant timer channel. See Section 9.8.

To start the timer, write 1 to PRUN/T16_CTLx register.

The timer starts counting down from the initial value or from the current counter value if no initial value was preset. When the counter underflows, the timer outputs an underflow pulse and presets the counter to the initial value. An interrupt request is sent simultaneously to the interrupt controller (ITC).

In one-shot mode, the timer stops counting.

In repeat mode, the timer continues counting from the reloaded initial value.

Write 0 to PRUN to stop the timer via the application program. The counter stops counting and retains the current counter value until either the timer is reset or restarted. To restart the count from the initial value, the timer should be reset before writing 1 to PRUN.

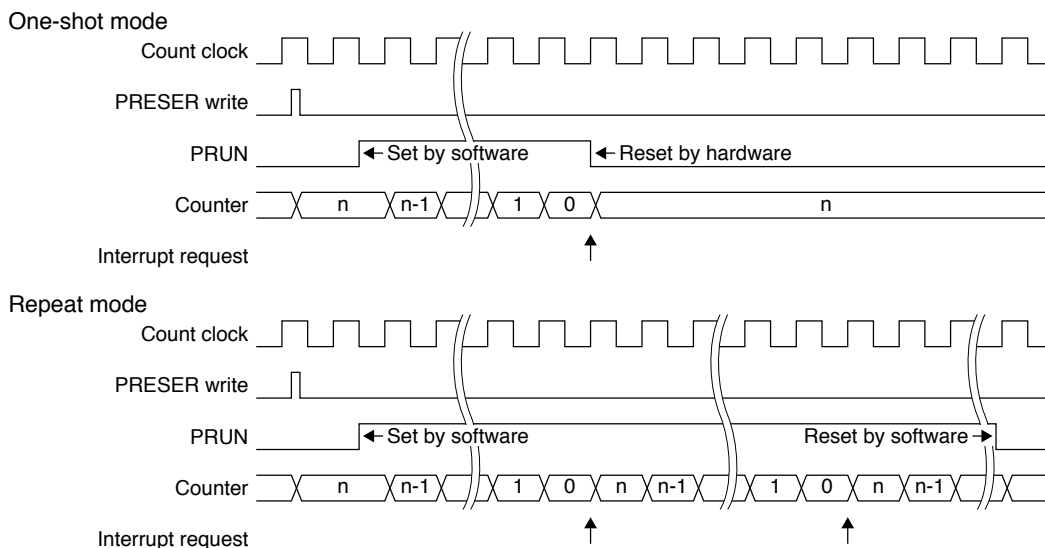


Figure 9.6.1 Count Operation

9.7 T16 Output Signals

The T16 module outputs underflow pulses when the counter underflows.

These pulses are used for timer interrupt requests.

These pulses are also used to generate the serial transfer clock for the internal serial interface or the A/D conversion trigger signal.

The clock generated is sent to the internal peripheral module, as shown below.

T16 Ch.1 output clock → A/D converter

T16 Ch.2 output clock → SPI

T16 Ch.3 output clock → I²C master

Use the following equations to calculate the reload data register value for obtaining the desired transfer rate or A/D conversion interval:

$$\text{SPI} \quad TR = \frac{ct_clk}{bps \times 2} - 1$$

$$\text{I}^2\text{C master} \quad TR = \frac{ct_clk}{bps \times 4} - 1$$

$$\text{A/D converter} \quad TR = \frac{ct_clk \times adi}{2} - 1$$

ct_clk: Count clock frequency (Hz)

TR: Reload data (0–65535)

bps: Transfer rate (bits/s)

adi: A/D conversion interval (s)

9.8 T16 Interrupts

Each channel of the T16 module outputs an interrupt request to the interrupt controller (ITC) when the counter underflows.

Underflow interrupt

When the counter underflows, the interrupt flag T16IF/T16_INTx register, which is provided for each channel in the T16 module, is set to 1. At the same time, an interrupt request is sent to the ITC if T16IE/T16_INTx register has been set to 1 (interrupt enabled). An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied.

If T16IE is set to 0 (interrupt disabled, default), no interrupt request will be sent to the ITC.

For specific information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- The T16 module interrupt flag T16IF must be reset in the interrupt handler routine after a T16 interrupt has occurred to prevent recurring interrupts.
 - Reset T16IF before enabling T16 interrupts with T16IE to prevent occurrence of unwanted interrupt. T16IF is reset by writing 1.

9.9 Control Register Details

Table 9.9.1 List of T16 Registers

Address	Register name		Function
0x4200	T16_CLK0	T16 Ch.0 Count Clock Select Register	Selects a count clock.
0x4202	T16_TR0	T16 Ch.0 Reload Data Register	Sets reload data.
0x4204	T16_TC0	T16 Ch.0 Counter Data Register	Counter data
0x4206	T16_CTL0	T16 Ch.0 Control Register	Sets the timer mode and starts/stops the timer.
0x4208	T16_INT0	T16 Ch.0 Interrupt Control Register	Controls the interrupt.
0x4220	T16_CLK1	T16 Ch.1 Count Clock Select Register	Selects a count clock.
0x4222	T16_TR1	T16 Ch.1 Reload Data Register	Sets reload data.
0x4224	T16_TC1	T16 Ch.1 Counter Data Register	Counter data
0x4226	T16_CTL1	T16 Ch.1 Control Register	Sets the timer mode and starts/stops the timer.
0x4228	T16_INT1	T16 Ch.1 Interrupt Control Register	Controls the interrupt.
0x4240	T16_CLK2	T16 Ch.2 Count Clock Select Register	Selects a count clock.
0x4242	T16_TR2	T16 Ch.2 Reload Data Register	Sets reload data.
0x4244	T16_TC2	T16 Ch.2 Counter Data Register	Counter data
0x4246	T16_CTL2	T16 Ch.2 Control Register	Sets the timer mode and starts/stops the timer.
0x4248	T16_INT2	T16 Ch.2 Interrupt Control Register	Controls the interrupt.
0x4260	T16_CLK3	T16 Ch.3 Count Clock Select Register	Selects a count clock.
0x4262	T16_TR3	T16 Ch.3 Reload Data Register	Sets reload data.
0x4264	T16_TC3	T16 Ch.3 Counter Data Register	Counter data
0x4266	T16_CTL3	T16 Ch.3 Control Register	Sets the timer mode and starts/stops the timer.
0x4268	T16_INT3	T16 Ch.3 Interrupt Control Register	Controls the interrupt.
0x4280	T16_CLK4	T16 Ch.4 Count Clock Select Register	Selects a count clock.
0x4282	T16_TR4	T16 Ch.4 Reload Data Register	Sets reload data.
0x4284	T16_TC4	T16 Ch.4 Counter Data Register	Counter data
0x4286	T16_CTL4	T16 Ch.4 Control Register	Sets the timer mode and starts/stops the timer.
0x4288	T16_INT4	T16 Ch.4 Interrupt Control Register	Controls the interrupt.

The T16 registers are described in detail below. These are 16-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

T16 Ch.x Count Clock Select Registers (T16_CLKx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16 Ch.x Count Clock Select Register (T16_CLKx)	0x4200	D15-4	–	reserved	–	–	–	0 when being read.
	0x4220	D3-0	DF[3:0]	Count clock division ratio select	DF[3:0] Division ratio	0x0	R/W	Source clock = PCLK
	0x4240				0xf reserved			
	0x4260				0xe 1/16384			
	0x4280				0xd 1/8192			
	(16 bits)				0xc 1/4096			
					0xb 1/2048			
					0xa 1/1024			
					0x9 1/512			
					0x8 1/256			
					0x7 1/128			
					0x6 1/64			
					0x5 1/32			
					0x4 1/16			
					0x3 1/8			
					0x2 1/4			
				0x1 1/2				
				0x0 1/1				

D[15:4] Reserved

D[3:0] DF[3:0]: Count Clock Division Ratio Select Bits

Selects a PCLK division ratio to generate the count clock.

Table 9.9.2 PCLK Division Ratio Selection

DF[3:0]	Division ratio	DF[3:0]	Division ratio
0xf	Reserved	0x7	1/128
0xe	1/16384	0x6	1/64
0xd	1/8192	0x5	1/32
0xc	1/4096	0x4	1/16
0xb	1/2048	0x3	1/8
0xa	1/1024	0x2	1/4
0x9	1/512	0x1	1/2
0x8	1/256	0x0	1/1

(Default: 0x0)

Note: Make sure the counter is halted before setting the count clock.

T16 Ch.x Reload Data Registers (T16_TRx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16 Ch.x Reload Data Register (T16_TRx)	0x4202 0x4222 0x4242 0x4262 0x4282 (16 bits)	D15-0	TR[15:0]	Reload data TR15 = MSB TR0 = LSB	0x0 to 0xffff	0x0	R/W	

D[15:0] TR[15:0]: Reload Data Bits

Sets the counter initial value. (Default: 0x0)

The reload data set in this register is preset to the counter when the timer is reset or the counter underflows. If the timer is started after resetting, it counts down from the reload value (initial value). This means that the reload value and the input clock frequency determine the time elapsed from the point at which the timer starts until the underflow occurs (or between underflows). The time determined is used to obtain the desired wait time, the intervals between periodic interrupts or A/D conversion trigger, and the programmable serial interface transfer clock.

T16 Ch.x Counter Data Registers (T16_TCx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16 Ch.x Counter Data Register (T16_TCx)	0x4204	D15–0	TC[15:0]	Counter data TC15 = MSB TC0 = LSB	0x0 to 0xffff	0xffff	R	
	0x4224							
	0x4244							
	0x4264							
	0x4284 (16 bits)							

D[15:0] TC[15:0]: Counter Data Bits

The counter data can be read out. (Default: 0xffff)
This register is read-only and cannot be written to.

T16 Ch.x Control Registers (T16_CTLx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
T16 Ch.x Control Register (T16_CTLx)	0x4206	D15–5	–	reserved	–	–	–	Do not write 1.		
	0x4226		–	reserved	–	–				
	0x4246		D4	TRMD	Count mode select	1 One shot 0 Repeat	0		R/W	
	0x4266		D3–2	–	reserved	–	–		–	0 when being read.
	0x4286 (16 bits)		D1	PRESER	Timer reset	1 Reset 0 Ignored	0		W	
	D0	PRUN	Timer run/stop control	1 Run 0 Stop	0	R/W				

D[15:5] Reserved (Do not write 1.)

D4 TRMD: Count Mode Select Bit

Selects the count mode.

1 (R/W): One-shot mode

0 (R/W): Repeat mode (default)

Setting TRMD to 0 sets the timer to repeat mode. In this mode, once the count starts, the timer continues to run until stopped by the application program. When the counter underflows, the timer presets the counter to the reload data register value and continues the count. Thus, the timer periodically outputs an underflow pulse. Set the timer to this mode to generate periodic interrupts or A/D conversion triggers at desired intervals or to generate a serial transfer clock.

Setting TRMD to 1 sets the timer to one-shot mode. In this mode, the 16-bit timer stops automatically as soon as the counter underflows. This means only one interrupt can be generated after the timer starts. Note that the timer presets the counter to the reload data register value, then stops when an underflow occurs. Set the timer to this mode to set a specific wait time.

D[3:2] Reserved

D1 PRESER: Timer Reset Bit

Resets the timer.

1 (W): Reset

0 (W): Ignored

0 (R): Always 0 when read (default)

Writing 1 to this bit presets the counter to the reload data value.

D0 PRUN: Timer Run/Stop Control Bit

Controls the timer RUN/STOP.

1 (R/W): Run

0 (R/W): Stop (default)

The timer starts counting when PRUN is written as 1 and stops when written as 0. When the timer is stopped, the counter data is retained until reset or until the next RUN state.

T16 Ch.x Interrupt Control Registers (T16_INTx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16 Ch.x Interrupt Control Register (T16_INTx)	0x4208	D15-9	–	reserved	–	–	–	0 when being read.
	0x4228	D8	T16IE	T16 interrupt enable	1 Enable 0 Disable	0	R/W	
	0x4248	D7-1	–	reserved	–	–	–	0 when being read.
	0x4268 0x4288 (16 bits)	D0	T16IF	T16 interrupt flag	1 Cause of interrupt occurred 0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.

D[15:9] Reserved

D8 T16IE: T16 Interrupt Enable Bit

Enables or disables interrupts caused by counter underflows for each channel.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting T16IE to 1 enables T16 interrupt requests to the ITC; setting to 0 disables interrupts.

D[7:1] Reserved

D0 T16IF: T16 Interrupt Flag Bit

Indicates whether the cause of counter underflow interrupt has occurred or not.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

T16IF is the T16 module interrupt flag that is set to 1 when the counter underflows.

T16IF is reset by writing 1.

10 16-bit PWM timers (T16A2)

10.1 T16A2 Module Overview

The S1C17706 includes a 16-bit PWM timer (T16A2) module that consists of four channels of counter blocks and comparator/capture blocks. This timer can be used as an interval timer, PWM waveform generator, external event counter and a count capture unit to measure external event periods.

The features of T16A2 are listed below.

- Four channels of 16-bit up counter blocks
- Four channels of comparator/capture blocks to which a counter block to be connected is selectable.
- Allows selection of a count clock asynchronously with the CPU clock.
- Supports event counter function using an external clock.
- The comparator compares the counter value with two specified comparison values to generate interrupts and a PWM waveform.
- The capture unit captures counter values using two external trigger signals and generates interrupts.

Figure 10.1.1 shows the T16A2 configuration.

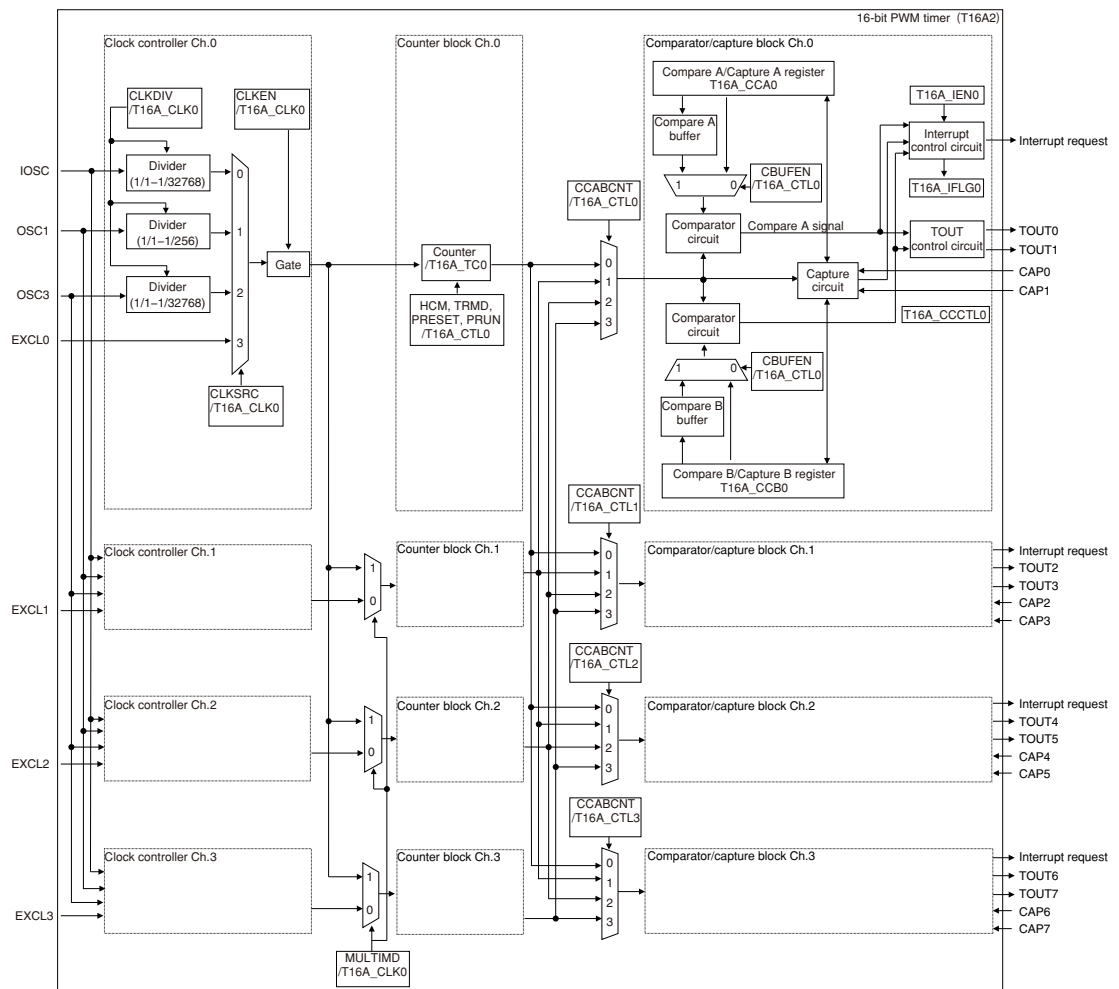


Figure 10.1.1 T16A2 Configuration

Clock controller

T16A2 includes four channels of clock controllers that generate the count clock for the counters. The clock source and division ratio can be selected with software.

Counter block

The counter block includes a 16-bit up-counter that operates with an IOSC, OSC3, or OSC1 division clock, or the external count clock input from outside the IC. The T16A2 module allows software to run and stop the counter of each channel, and to reset the counter value (cleared to 0) as well as selection of the count clock. The counter can also be reset by the compare B signal output from the comparator/capture block.

Comparator/capture block

The comparator/capture block provides a counter comparison function (comparator mode) and a count capture function (capture mode). When comparator mode is selected via software, the comparator/capture block can be used as a PWM waveform or clock generator. When capture mode is selected, this block can be used as a count capture unit for measuring external event periods/cycles. The comparator circuit generates the compare A and B signals that represent matching between compare A/B register values (set via software) and the counter value, and outputs the signals to the TOUT control circuit and the interrupt control circuit. The TOUT control circuit generates a PWM or other signal from the compare A and B signals and outputs it to the external TOUTAx and TOUTBx pins. The capture circuit loads the counter value to the capture A or B register using the CAPAx or CAPBx input signal that represents external events issued as a trigger. The interrupt control circuit outputs an interrupt signal to the interrupt controller (ITC) module according to the interrupt condition that has been set. Comparator mode and capture mode cannot be used simultaneously in the same channel.

Combination of counter block channel and comparator/capture block channel

Generally, a counter block is connected to the comparator/capture block with the same channel number. The counter block and the comparator/capture block in different channels can also be connected. This allows a counter to use two or more comparator/capture blocks for expanding the comparison/capturing function from two systems to maximum eight systems (details are described later).

Note: Each channel of the T16A2 module has the same functions except for the control register addresses. The description in this section applies to all channels of the T16A2 module otherwise a channel number is specified. The 'x' in the register name refers to the channel number (0 to 3).

Example: T16A_CTLx register

Ch.0: T16A_CTL0 register

Ch.1: T16A_CTL1 register

Ch.2: T16A_CTL2 register

Ch.3: T16A_CTL3 register

10.2 T16A2 Input/Output Pins

Table 10.2.1 lists the input/output pins for the T16A2 module.

Table 10.2.1 List of T16A2 Pins

Pin name	I/O	Qty	Function
EXCL0 (for Ch.0) EXCL1 (for Ch.1) EXCL2 (for Ch.2) EXCL3 (for Ch.3)	I	4	External clock input pins Inputs an external clock for the event counter function.
CAP0, CAP1 (for Ch.0) CAP2, CAP3 (for Ch.1) CAP4, CAP5 (for Ch.2) CAP6, CAP7 (for Ch.3)	I	8	Counter-capture trigger signal input pins (effective in capture mode) The specified edge (falling edge, rising edge, or both) of the signal input to the CAP0/2/4/6 pin captures the counter data into the capture A register. The CAP1/3/5/7 pin input signal captures the counter data into the capture B register.
TOUT0, TOUT1 (for Ch.0) TOUT2, TOUT3 (for Ch.1) TOUT4, TOUT5 (for Ch.2) TOUT6, TOUT7 (for Ch.3)	O	8	Timer generating signal output pins (effective in comparator mode) Each channel has two output pins and the signals generated in different conditions can be output.

The T16A2 input/output pins (EXCL_x, CAP_x, TOUT_x) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as T16A2 input/output pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

10.3 Count Clock

The clock controller includes a clock source selector, dividers, and a gate circuit for controlling the count clock. The count clock can be controlled in each channel individually.

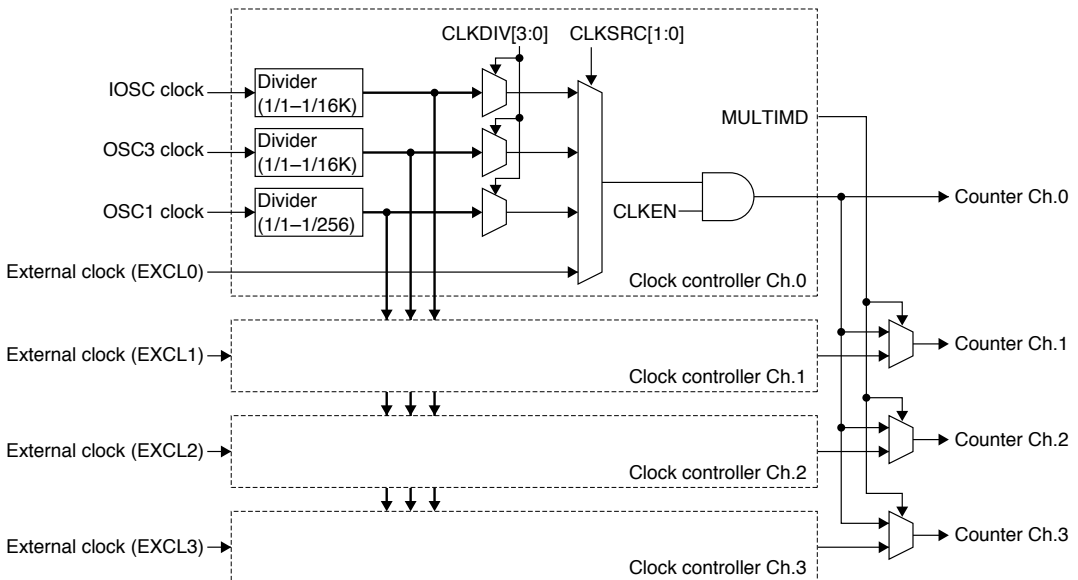


Figure 10.3.1 Clock Controller

Clock source selection

The clock source can be selected from IOSC, OSC3, OSC1, or external clock using CLKSRC[1:0]/T16A2_CLK_x register.

Table 10.3.1 Clock Source Selection

CLKSRC[1:0]	Clock source
0x3	External clock (EXCLx)
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

When external clock is selected, the timer can be used as an event counter or for measuring pulse widths by inputting an external clock or pulses. The table below lists the external clock input pins. It is not necessary to switch their pin functions from general-purpose I/O port. However, do not set the I/O port to output mode.

Table 10.3.2 External Clock Input Pins

Channel	External clock input pin
T16A2 Ch.0	EXCL0
T16A2 Ch.1	EXCL1
T16A2 Ch.2	EXCL2
T16A2 Ch.3	EXCL3

Internal clock division ratio selection

When an internal clock (IOSC, OSC3, or OSC1) is selected, use CLKDIV[3:0]/T16A_CLKx register to select the division ratio.

Table 10.3.3 Internal Clock Division Ratio Selection

CLKDIV[3:0]	Division ratio	
	Clock source = IOSC or OSC3	Clock source = OSC1
0xf	1/32768	Reserved
0xe	1/16384	Reserved
0xd	1/8192	Reserved
0xc	1/4096	Reserved
0xb	1/2048	Reserved
0xa	1/1024	Reserved
0x9	1/512	Reserved
0x8	1/256	
0x7	1/128	
0x6	1/64	
0x5	1/32	
0x4	1/16	
0x3	1/8	
0x2	1/4	
0x1	1/2	
0x0	1/1	

(Default: 0x0)

Clock enable

Clock supply to the counter is controlled using CLKEN/T16A_CLKx register. The CLKEN default setting is 0, which disables the clock supply. Setting CLKEN to 1 sends the clock generated as above to the counter. If T16A2 is not required, disable the clock supply to reduce current consumption.

Multi-comparator/capture mode

The T16A2 module allows a counter channel to be connected to multiple comparator/capture channels (multi-comparator/capture mode). In this case, all channels must be clocked with the Ch.0 clock. Use MULTIMD/T16A_CLK0 register to supply the Ch.0 clock to all channels. When using T16A2 in multi-comparator/capture mode, set MULTIMD to 1. When connecting the counter and comparator/capture block in the same channel (normal channel mode), set MULTIMD to 0 (default).

Note: Make sure the T16A2 count is stopped before setting the count clock.

10.4 T16A2 Operating Modes

The T16A2 module provides some operating modes to support various usages. This section describes the functions of each operating mode and how to enter the mode.

10.4.1 Comparator Mode and Capture Mode

The T16A_CCAx and T16A_CCBx registers that are embedded in the comparator/capture block can be set to comparator mode or capture mode, individually. The T16A_CCAx register mode is selected using CCAMD/T16A_CCCTLx register and the T16A_CCBx register mode is selected using CCBMD/T16A_CCCTLx register.

Comparator mode (CCAMD/CCBMD = 0, default)

The comparator mode compares the counter value and the comparison value set via software. It generates an interrupt and toggles the timer output signal level when the values are matched. The T16A_CCAx and T16A_CCBx registers function as the compare A and compare B registers that are used for loading compare values in this mode.

When the counter reaches the value set in the compare A register during counting, the comparator asserts the compare A signal. At the same time the compare A interrupt flag is set and the interrupt signal of the timer channel is output to the ITC if the interrupt has been enabled.

When the counter reaches the value set in the compare B register, the comparator asserts the compare B signal. At the same time the compare B interrupt flag is set and the interrupt signal of the timer channel is output to the ITC if the interrupt is enabled. Furthermore, the counter is reset to 0.

The compare A period (time from start of counting to occurrence of a compare A interrupt) and the compare B period (time from start of counting to occurrence of a compare B interrupt) can be calculated as follows:

$$\text{Compare A period} = (\text{CCA} + 1) / \text{ct_clk} \text{ [second]}$$

$$\text{Compare B period} = (\text{CCB} + 1) / \text{ct_clk} \text{ [second]}$$

CCA: Compare A register value set (0 to 65535)

CCB: Compare B register value set (0 to 65535)

ct_clk: Count clock frequency [Hz]

The compare A and compare B signals are also used to generate a timer output waveform (TOUT). See Section 10.6, "Timer Output Control," for more information.

To generate PWM waveform, the T16A_CCAx and T16A_CCBx registers must be both placed into comparator mode.

Compare buffers

The compare buffer is used to synchronize the comparison data update timings and the counter operation. Setting CBUFEN/T16A_CTLx register to 1 enables the compare buffer. The compare A and B signals will be generated by comparing the counter values with the compare A and B buffer values instead of the compare A and B register values. The compare A and B register values written via software are loaded to the compare A and B buffers when the compare B signal is generated.

Capture mode (CCAMD/CCBMD = 1)

The capture mode captures the counter value when an external event such as a key entry occurs (at the specified edge of the external input signal). In this mode, the T16A_CCAx and/or T16A_CCBx registers function as the capture A and/or capture B registers.

The table below lists the input pins of the external trigger signals used for capturing counter values. The pin function of the corresponding ports must be switched for trigger input in advance. See the "I/O Ports (P)" chapter for switching the pin function.

Table 10.4.1.1 List of Counter Capture Trigger Signal Input Pins

Channel	Trigger input pins	
	Capture A	Capture B
T16A2 Ch.0	CAP0	CAP1
T16A2 Ch.1	CAP2	CAP3
T16A2 Ch.2	CAP4	CAP5
T16A2 Ch.3	CAP6	CAP7

The trigger edge of the signal can be selected using the CAPATR[1:0]/T16A_CCCTLx register for capture A and CAPBTR[1:0]/T16A_CCCTLx register for capture B.

Table 10.4.1.2 Capture Trigger Edge Selection

CAPATR[1:0]/CAPBTR[1:0]	Trigger edge
0x3	Falling edge and rising edge
0x2	Falling edge
0x1	Rising edge
0x0	Not triggered

(Default: 0x0)

When a specified trigger edge is input during counting, the current counter value is loaded to the capture register. At the same time the capture A or capture B interrupt flag is set and the interrupt signal of the timer channel is output to the ITC if the interrupt has been enabled. This interrupt can be used to read the captured data from the T16A_CCAx or T16A_CCBx register. For example, external event cycles and pulse widths can be measured from the difference between two captured counter values read.

If the captured data is overwritten by the next trigger when the capture A or capture B interrupt flag has already been set, the overwrite interrupt flag will be set. This interrupt can be used to execute an overwrite error handling. To avoid occurrence of unnecessary overwrite interrupt, the capture A or capture B interrupt flag must be reset after the captured data has been read from the T16A_CCAx or T16A_CCBx register.

- Notes:**
- The correct captured data may not be obtained if the captured data is read at the same time the next value is being captured. Read the capture register twice to check if the read data is correct as necessary.
 - To capture counter data properly, both the High and Low period of the CAPx trigger signal must be longer than the source clock cycle time.

The setting of CAPATR[1:0] or CAPBTR[1:0] is ineffective in comparator mode. No counter capturing operation will be performed even if a trigger edge is specified.

The capture mode cannot generate/output the TOUT signal as no compare signal is generated.

10.4.2 Repeat Mode and One-Shot Mode

Each counter features two count modes: repeat mode and one-shot mode. The count mode is selected using TRMD/T16A_CTLx register.

Repeat mode (TRMD = 0, default)

Setting TRMD to 0 sets the corresponding counter to repeat mode.

In this mode, once the count starts, the counter continues running until stopped by the application program. The counter continues the count even if the counter is reset to 0 due to a counter overflow. The counter should be set to this mode to generate periodic interrupts at desired intervals or to generate a timer output waveform.

One-shot mode (TRMD = 1)

Setting TRMD to 1 sets the corresponding counter to one-shot mode.

In this mode, the counter stops automatically as soon as the counter is reset or it overflows. The counter should be set to this mode to set a specific wait time or for pulse width measurement.

10.4.3 Normal Channel Mode and Multi-Comparator/Capture Mode

One channel of the T16A2 module basically consists of a counter block and a comparator/capture block. The T16A2 module also allows the application to use expanded comparator/capture function by connecting two or more comparator/capture blocks to one counter block. To support this expansion, two operating modes are provided: normal channel mode and multi-comparator/capture mode. This operating mode can be selected using MULTIMD/T16_CLK0 register.

Normal channel mode (MULTIMD = 0, default)

Set the T16A2 module to this mode when using it as four channels of different timers by connecting a counter block with the comparator/capture block of the same channel. In this mode, the counters can use different count clocks.

Each timer channel provides CCABCNT[1:0]/T16A_CTLx register to select a counter channel to be connected to the comparator/capture block.

Table 10.4.3.1 Counter Selection

CCABCNT[1:0]	Counter channel
0x3	Ch.3 (Counter 3)
0x2	Ch.2 (Counter 2)
0x1	Ch.1 (Counter 1)
0x0	Ch.0 (Counter 0)

(Default: 0x0)

When using the T16A2 module in normal channel mode, be sure to connect the counter block to the comparator/capture block in the same channel.


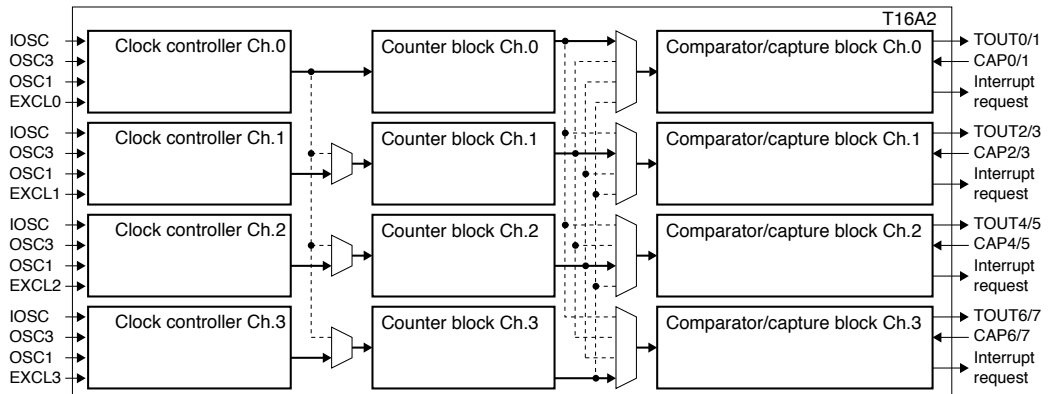


Figure 10.4.3.1 Timer Configuration in Normal Channel Mode (two comparator/capture blocks × four channels)


Note: Do not connect a counter block to a comparator/capture block in a different channel in normal channel mode (MULTIMD = 0), as normal operation cannot be guaranteed.

Multi-comparator/capture mode (MULTIMD = 1)

In order to set three or more comparison values for one counter or to capture the contents of one counter using three or more trigger signals, two or more comparator/capture blocks can be connected to one counter. Multi-comparator/capture mode is provided for this purpose. In this mode, any counter block can be combined with the comparator/capture blocks using CCABCNT[1:0] described above. Note, however, that the count clock is fixed at one type for counter Ch.0, regardless of the counter to be used. The clock settings for Ch.1 to Ch.3 are ineffective.

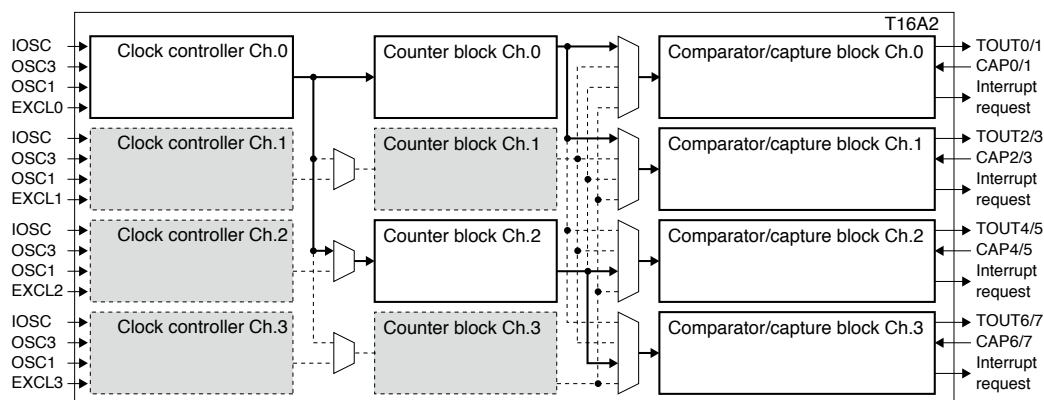

(1) Configuration Example 1 (four comparator/capture blocks × two channels)

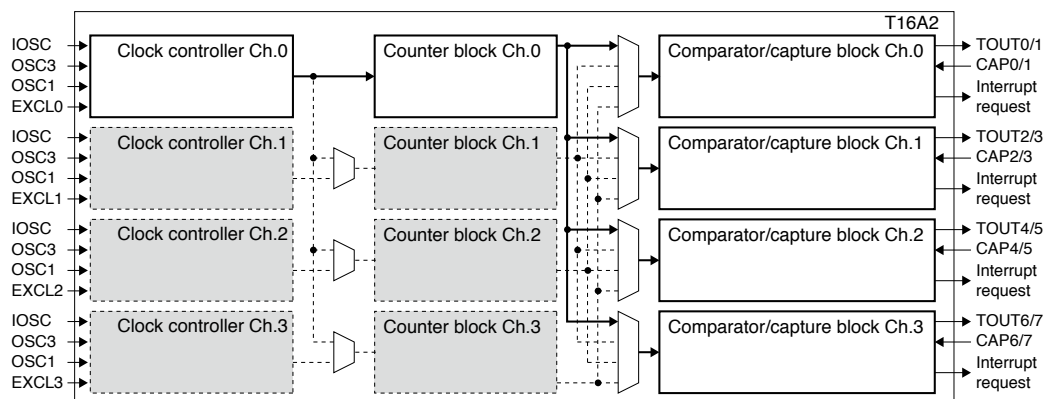

(2) Configuration Example 2 (eight comparator/capture blocks × one channel)

Figure 10.4.3.2 Timer Configuration Example in Multi-Comparator/Capture Mode

10.4.4 Normal Clock Mode and Half Clock Mode

T16A2 supports half clock mode to control the duty ratio of the PWM output waveform with high accuracy. In half clock mode, T16A2 uses the dual-edge counter, which counts at the rising and falling edges of the count clock, to compare with the compare A register. This makes it possible to control the duty ratio with double accuracy as compared to normal clock mode.

Use HCM/T16A_CTLx register to select half clock mode.

Normal clock mode (HCM = 0, default)

In normal clock mode, T16A2 generates a compare A signal when the T16A_TCx register value matches the T16A_CCAx register.

Half clock mode (HCM = 1)

In half clock mode, T16A2 generates a compare A signal when the dual-edge counter value matches the T16A_CCAx register.

Notes: • T16A2 must be placed into comparator mode to set half clock mode, as it is effective only when PWM waveform is generated.

Be sure to set T16A2 to normal clock mode (HCM = 0) under a condition shown below.

- (1) When T16A2 is placed into capture mode
- (2) When TOUTAMD/T16A_CCCTLx register is set to 0x2 or 0x3
- (3) When TOUTBMD/T16A_CCCTLx register is set to 0x2 or 0x3

- The dual-edge counter value cannot be read.

- Do not use the compare A interrupt in half clock mode.
- In half clock mode, set the value of the T16A_CCBx less than T16A_CCAx setting value/2 + 0x8000.

10.5 Counter Control

10.5.1 Counter Reset

The counter can be reset to 0 by writing 1 to PRESET/T16A_CTLx register after the count clock supply to each channel. The register is set to 0 once the reset is completed.

Normally, the counter should be reset by writing 1 to this bit before starting the count.

The counter is reset by the hardware if the counter reaches the compare B register value after the count starts.

10.5.2 Counter RUN/STOP Control

Make the following settings before starting the count operation.

- (1) Switch the input/output pin functions to be used for T16A2. Refer to the “I/O Port (P)” chapter.
- (2) Select operating modes. See Section 10.4.
- (3) Select the clock source. See Section 10.3.
- (4) Configure the timer outputs (TOUT). See Section 10.6.
- (5) If using interrupts, set the interrupt level and enable the T16A2 interrupts. See Section 10.7.
- (6) Reset the counter to 0. See Section 10.5.1.
- (7) Set comparison data (in comparator mode). See Section 10.4.1.

Each timer channel provides PRUN/T16A_CTLx register to control the counter operation.

The counter starts counting when 1 is written to PRUN. Writing 0 to PRUN disables clock input and stops the count.

This control does not affect the counter data. The counter data is retained even when the count is halted, allowing resumption of the count from that data.

If PRUN and PRESET are written as 1 simultaneously, the counter starts counting after reset.

10.5.3 Reading Counter Values

The counter value can be read from T16ATC[15:0]/T16A_TCx register even if the counter is running. However, the counter value should be read at once using a 16-bit transfer instruction. If data is read twice using an 8-bit transfer instruction, the correct value may not be obtained due to occurrence of count up between readings.

10.5.4 Timing Charts

Comparator mode

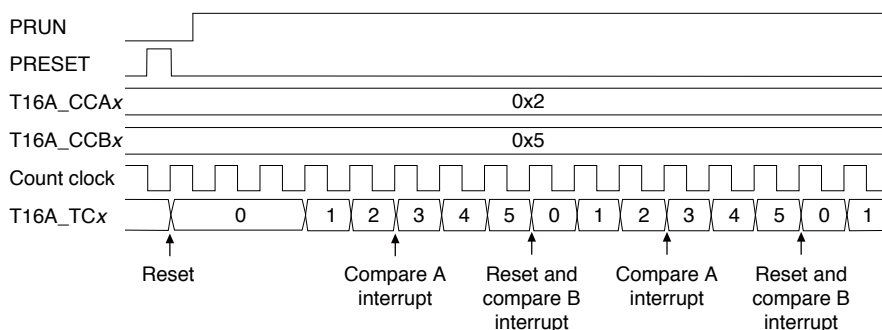


Figure 10.5.4.1 Operation Timing in Comparator Mode

Capture mode

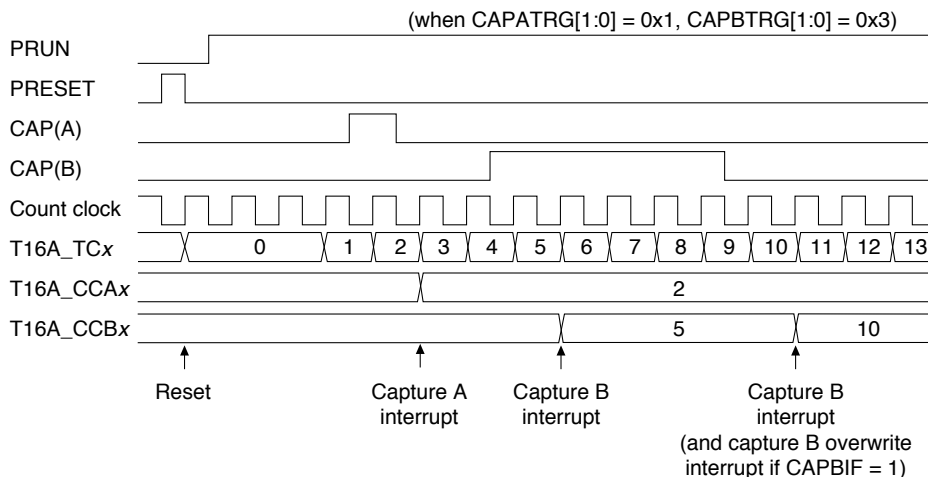


Figure 10.5.4.2 Operation Timing in Capture Mode

10.6 Timer Output Control

The timer that has been set in comparator mode can generate TOUT signals using the compare A and compare B signals and can output it to external devices. Each timer channel provides two TOUT outputs, thus the T16A2 module can output up to eight TOUT signals.

Figure 10.6.1 shows the TOUT output circuit (one timer channel).

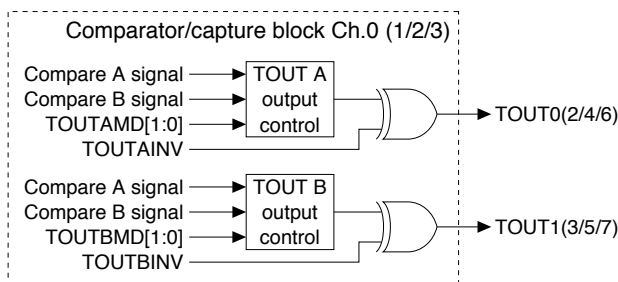


Figure 10.6.1 TOUT Output Circuit

Each timer channel includes two TOUT output circuits and their signal generation and output can be controlled individually. Although the output circuit and register names use letters ‘A’ and ‘B’ to distinguish two systems, it does not mean that they correspond to compare A and B signals.

TOUT output pins

Table 10.6.1 lists correspondence between the TOUT pins and the timer channels. The pin function of the corresponding ports must be switched for TOUT output in advance. See the “I/O Ports (P)” chapter for switching the pin function.

Table 10.6.1 List of TOUT Output Pins

Channel	TOUT output pin	
	System A	System B
T16A2 Ch.0	TOUT0	TOUT1
T16A2 Ch.1	TOUT2	TOUT3
T16A2 Ch.2	TOUT4	TOUT5
T16A2 Ch.3	TOUT6	TOUT7

TOUT generation mode

TOUTAMD[1:0]/T16A_CCCTLx register (for system A) or TOUTBMD[1:0]/T16A_CCCTLx register (for sys-

tem B) is used to set how the TOUT signal is changed by the compare A and compare B signals.

Table 10.6.2 TOUT Generation Mode

TOUTAMD[1:0]/ TOUTBMD[1:0]	When compare A occurs	When compare B occurs
0x3	No change	Toggle
0x2	Toggle	No change
0x1	Rise	Fall
0x0	Disable output	

(Default: 0x0)

TOUTAMD[1:0] and TOUTBMD[1:0] are also used to turn the TOUT outputs On and Off.

TOUT signal polarity selection

By default, an active High output signal is generated. This logic can be inverted using TOUTAINV/T16A_CCCTLx register (for system A) or TOUTBINV/T16A_CCCTLx register (for system B). Writing 1 to TOUTAINV/TOUTBINV sets the timer to generate an active Low TOUT signal.

Resetting the counter sets the TOUT signal to the inactive level.

Figure 10.6.2 illustrates the TOUT output waveform.


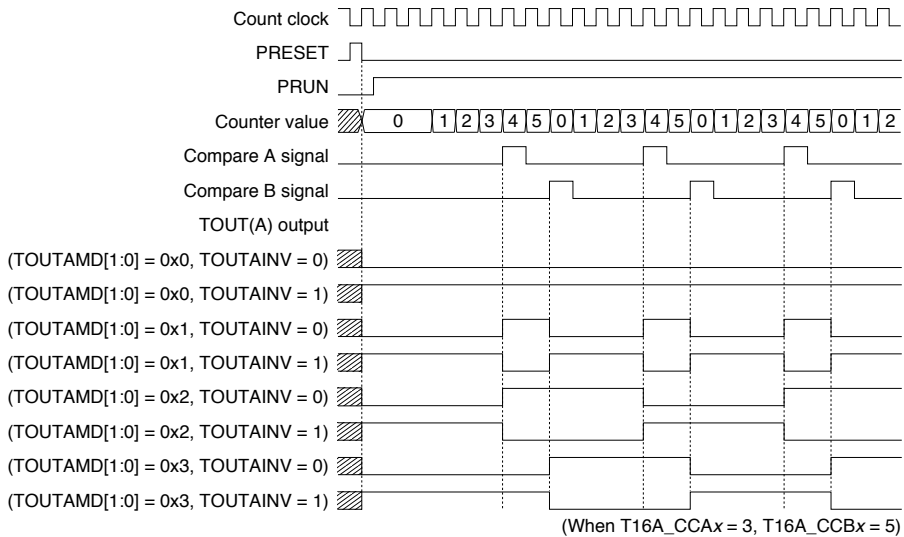


Figure 10.6.2 TOUT Output Waveform

PWM waveform output timings

Normal clock mode (HCM = 0)

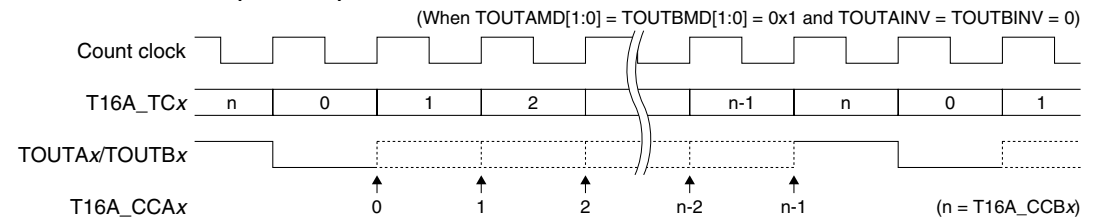

Example: HCM = 0, T16A_CCAx = 1, and T16A_CCBx = 5


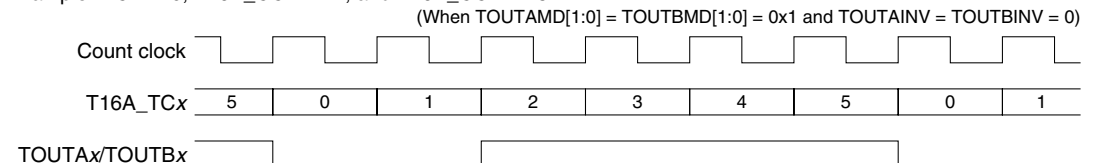


Figure 10.6.3 PWM Waveform Output Timings in Normal Clock Mode

Half clock mode (HCM = 1)

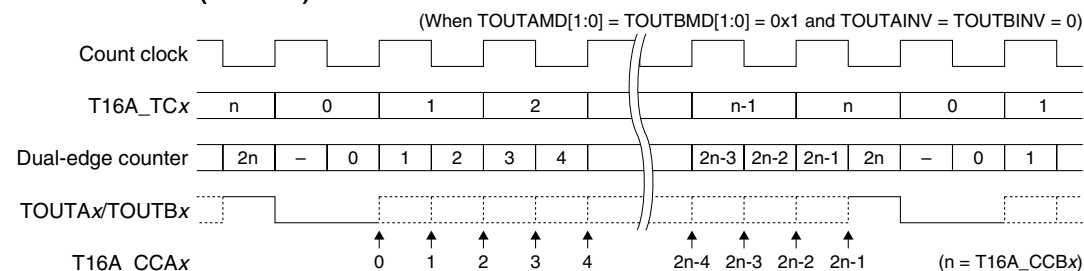

Example: HCM = 1, T16A_CCAx = 1, and T16A_CCBx = 5

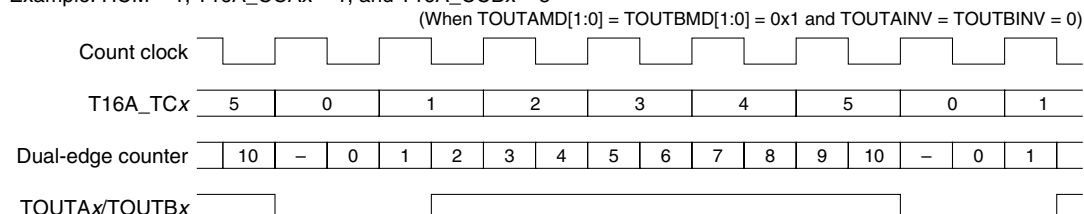


Figure 10.6.4 PWM Waveform Output Timings in Half Clock Mode

10.7 T16A2 Interrupts

The T16A2 module can generate the following six kinds of interrupts:

- Compare A interrupt (in comparator mode)
- Compare B interrupt (in comparator mode)
- Capture A interrupt (in capture mode)
- Capture B interrupt (in capture mode)
- Capture A overwrite interrupt (in capture mode)
- Capture B overwrite interrupt (in capture mode)

Each timer channel outputs a single interrupt signal shared by the above interrupt causes to the interrupt controller (ITC). Read the interrupt flags in the T16A2 module to identify the interrupt cause that has been occurred.

Interrupts in comparator mode

Compare A interrupt

This interrupt request is generated when the counter matches the compare A register value during counting in comparator mode. It sets the interrupt flag CAIF/T16A_IFLGx register in the T16A2 module to 1.

To use this interrupt, set CAIE/T16A_IENx register to 1. If CAIE is set to 0 (default), interrupt requests for this cause is not sent to the ITC.

Compare B interrupt

This interrupt request is generated when the counter matches the compare B register value during counting in comparator mode. It sets the interrupt flag CBIF/T16A_IFLGx register in the T16A2 module to 1.

To use this interrupt, set CBIE/T16A_IENx register to 1. If CBIE is set to 0 (default), interrupt requests for this cause is not sent to the ITC.

Interrupts in capture mode

Capture A interrupt

This interrupt request is generated when the counter value is captured in the capture A register by an external trigger during counting in capture mode. It sets the interrupt flag CAPAIF/T16A_IFLGx register in the T16A2 module to 1.

To use this interrupt, set CAPAIE/T16A_IENx register to 1. If CAPAIE is set to 0 (default), interrupt requests for this cause is not sent to the ITC.

Capture B interrupt

This interrupt request is generated when the counter value is captured in the capture B register by an external trigger during counting in capture mode. It sets the interrupt flag CAPBIF/T16A_IFLGx register in the T16A2 module to 1.

To use this interrupt, set CAPBIE/T16A_IENx register to 1. If CAPBIE is set to 0 (default), interrupt requests for this cause is not sent to the ITC.

Capture A overwrite interrupt

This interrupt request is generated if the capture A register is overwritten by a new external trigger when the capture A interrupt flag CAPAIF has been set (a counter value has already been loaded to the capture A register). It sets the interrupt flag CAPAOWIF/T16A_IFLGx register in the T16A2 module to 1.

To use this interrupt, set CAPAOWIE/T16A_IENx register to 1. If CAPAOWIE is set to 0 (default), interrupt requests for this cause is not sent to the ITC.

CAPAOWIF will be set if the capture A register is overwritten when CAPAIF has been set regardless of whether the capture A register has been read or not. Therefore, be sure to reset CAPAIF immediately after the capture A register is read.

Capture B overwrite interrupt

This interrupt request is generated if the capture B register is overwritten by a new external trigger when the capture B interrupt flag CAPBIF has been set (a counter value has already been loaded to the capture B register). It sets the interrupt flag CAPBOWIF/T16A_IFLGx register in the T16A2 module to 1.

To use this interrupt, set CAPBOWIE/T16A_IENx register to 1. If CAPBOWIE is set to 0 (default), interrupt requests for this cause is not sent to the ITC.

CAPBOWIF will be set if the capture B register is overwritten when CAPBIF has been set regardless of whether the capture B register has been read or not. Therefore, be sure to reset CAPBIF immediately after the capture B register is read.

If the interrupt flag is set to 1 when the interrupt has been enabled, the T16A2 module outputs an interrupt request to the ITC. An interrupt is generated if the ITC and S1C17 core interrupt conditions are satisfied.

For more information on interrupt control registers and the operation when an interrupt occurs, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- Reset the interrupt flag before enabling interrupts with the interrupt enable bit to prevent occurrence of unwanted interrupt. The interrupt flag is reset by writing 1.
 - After an interrupt occurs, the interrupt flag in the T16A2 module must be reset in the interrupt handler routine.

10.8 Control Register Details

Table 10.8.1 List of T16A2 Registers

Address	Register name		Function
0x5068	T16A_CLK0	T16A Clock Control Register Ch.0	Controls the T16A2 Ch.0 clock.
0x5069	T16A_CLK1	T16A Clock Control Register Ch.1	Controls the T16A2 Ch.1 clock.
0x506a	T16A_CLK2	T16A Clock Control Register Ch.2	Controls the T16A2 Ch.2 clock.
0x506b	T16A_CLK3	T16A Clock Control Register Ch.3	Controls the T16A2 Ch.3 clock.
0x5400	T16A_CTL0	T16A Counter Ch.0 Control Register	Controls the counter.
0x5402	T16A_TC0	T16A Counter Ch.0 Data Register	Counter data
0x5404	T16A_CCCTL0	T16A Comparator/Capture Ch.0 Control Register	Controls the comparator/capture block and TOUT.
0x5406	T16A_CCA0	T16A Compare/Capture Ch.0 A Data Register	Compare A/capture A data
0x5408	T16A_CCB0	T16A Compare/Capture Ch.0 B Data Register	Compare B/capture B data
0x540a	T16A_IEN0	T16A Compare/Capture Ch.0 Interrupt Enable Register	Enables/disables interrupts.
0x540c	T16A_IFLG0	T16A Compare/Capture Ch.0 Interrupt Flag Register	Displays/sets interrupt occurrence status.
0x5420	T16A_CTL1	T16A Counter Ch.1 Control Register	Controls the counter.
0x5422	T16A_TC1	T16A Counter Ch.1 Data Register	Counter data
0x5424	T16A_CCCTL1	T16A Comparator/Capture Ch.1 Control Register	Controls the comparator/capture block and TOUT.
0x5426	T16A_CCA1	T16A Compare/Capture Ch.1 A Data Register	Compare A/capture A data
0x5428	T16A_CCB1	T16A Compare/Capture Ch.1 B Data Register	Compare B/capture B data
0x542a	T16A_IEN1	T16A Compare/Capture Ch.1 Interrupt Enable Register	Enables/disables interrupts.
0x542c	T16A_IFLG1	T16A Compare/Capture Ch.1 Interrupt Flag Register	Displays/sets interrupt occurrence status.
0x5440	T16A_CTL2	T16A Counter Ch.2 Control Register	Controls the counter.
0x5442	T16A_TC2	T16A Counter Ch.2 Data Register	Counter data
0x5444	T16A_CCCTL2	T16A Comparator/Capture Ch.2 Control Register	Controls the comparator/capture block and TOUT.
0x5446	T16A_CCA2	T16A Compare/Capture Ch.2 A Data Register	Compare A/capture A data
0x5448	T16A_CCB2	T16A Compare/Capture Ch.2 B Data Register	Compare B/capture B data
0x544a	T16A_IEN2	T16A Compare/Capture Ch.2 Interrupt Enable Register	Enables/disables interrupts.
0x544c	T16A_IFLG2	T16A Compare/Capture Ch.2 Interrupt Flag Register	Displays/sets interrupt occurrence status.
0x5460	T16A_CTL3	T16A Counter Ch.3 Control Register	Controls the counter.
0x5462	T16A_TC3	T16A Counter Ch.3 Data Register	Counter data
0x5464	T16A_CCCTL3	T16A Comparator/Capture Ch.3 Control Register	Controls the comparator/capture block and TOUT.
0x5466	T16A_CCA3	T16A Compare/Capture Ch.3 A Data Register	Compare A/capture A data
0x5468	T16A_CCB3	T16A Compare/Capture Ch.3 B Data Register	Compare B/capture B data
0x546a	T16A_IEN3	T16A Compare/Capture Ch.3 Interrupt Enable Register	Enables/disables interrupts.
0x546c	T16A_IFLG3	T16A Compare/Capture Ch.3 Interrupt Flag Register	Displays/sets interrupt occurrence status.

The T16A2 registers are described in detail below.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

T16A Clock Control Register Ch.x (T16A_CLKx)

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks				
T16A Clock Control Register Ch.x (T16A_CLKx)	0x5068 0x5069 0x506a 0x506b (8 bits)	D7–4	CLKDIV [3:0]	Clock division ratio select	CLKDIV[3:0]			Division ratio		0x0	R/W			
								OSC3 or IOSC	OSC1					
					0xf			1/32768	–					
					0xe			1/16384	–					
					0xd			1/8192	–					
					0xc			1/4096	–					
					0xb			1/2048	–					
					0xa			1/1024	–					
					0x9			1/512	–					
					0x8			1/256	1/256					
0x7			1/128	1/128										
0x6			1/64	1/64										
0x5			1/32	1/32										
0x4			1/16	1/16										
0x3			1/8	1/8										
0x2			1/4	1/4										
0x1			1/2	1/2										
0x0			1/1	1/1										
		D3–2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0]		Clock source		0x0	R/W				
					0x3		External clock							
					0x2		OSC3							
					0x1		OSC1							
					0x0		IOSC							
D1	MULTIMD	Multi-comparator/capture mode select	1	Multi	0	Normal	0	R/W	T16A_CLK0					
									–	reserved	–	–	T16A_CLK1–3 0 when being read.	
D0	CLKEN	Count clock enable	1	Enable	0	Disable	0	R/W						

D[7:4] CLKDIV[3:0]: Clock Division Ratio Select Bits

Selects the division ratio for generating the count clock when an internal clock (IOSC, OSC3, or OSC1) is used.

Table 10.8.2 Internal Clock Division Ratio Selection

CLKDIV[3:0]	Division ratio	
	Clock source = IOSC or OSC3	Clock source = OSC1
0xf	1/32768	Reserved
0xe	1/16384	Reserved
0xd	1/8192	Reserved
0xc	1/4096	Reserved
0xb	1/2048	Reserved
0xa	1/1024	Reserved
0x9	1/512	Reserved
0x8	1/256	
0x7	1/128	
0x6	1/64	
0x5	1/32	
0x4	1/16	
0x3	1/8	
0x2	1/4	
0x1	1/2	
0x0	1/1	

(Default: 0x0)

D[3:2] CLKSRC[1:0]: Clock Source Select Bits

Selects the count clock source.

Table 10.8.3 Clock Source Selection

CLKSRC[1:0]	Clock source
0x3	External clock (EXCLx)
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

When using an external clock as the count clock, supply the clock to the EXCLx pin.

10 16-BIT PWM TIMERS (T16A2)

D1 **MULTIMD: Multi-Comparator/Capture Mode Select Bit (T16A_CLK0 register)**

Sets the T16A2 module to multi-comparator/capture mode.

1 (R/W): Multi-comparator/capture mode

0 (R/W): Normal channel mode (default)

In multi-comparator/capture mode, the clock for Ch.0 configured in the T16A_CLK0 register is supplied to all timer channels. In normal channel mode, different clock configured for each channel individually is supplied to the respective counter.

D1 **Reserved (T16A_CLK1–3 registers)**

D0 **CLKEN: Count Clock Enable Bit**

Enables or disables the count clock supply to the counter.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

The CLKEN default setting is 0, which disables the clock supply. Setting CLKEN to 1 sends the clock selected as above to the counter. If timer operation is not required, disable the clock supply to reduce current consumption.

T16A Counter Ch.x Control Registers (T16A_CTLx)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks		
T16A Counter Ch.x Control Register (T16A_CTLx)	0x5400 0x5420 0x5440 0x5460 (16 bits)	D15–7	–	reserved		–	–	–	0 when being read.		
		D6	HCM	Half clock mode enable	1 Enable	0 Disable	0	R/W			
		D5–4	CCABCNT [1:0]	Counter select	CCABCNT[1:0]	Counter Ch.	0x3 0x2 0x1 0x0	Ch.3 Ch.2 Ch.1 Ch.0	0x0	R/W	
		D3	CBUFEN	Compare buffer enable	1 Enable	0 Disable	0	R/W			
		D2	TRMD	Count mode select	1 One-shot	0 Repeat	0	R/W			
		D1	PRESET	Counter reset	1 Reset	0 Ignored	0	W	0 when being read.		
		D0	PRUN	Counter run/stop control	1 Run	0 Stop	0	R/W			

D[15:7] **Reserved**

D6 **HCM: Half Clock Mode Enable Bit**

Sets T16A2 to half clock mode.

1 (R/W): Enabled (half clock mode)

0 (R/W): Disabled (normal clock mode) (default)

Setting HCM to 1 places T16A2 into half clock mode. In half clock mode, T16A2 uses the dual-edge counter, which counts at the rising and falling edges of the count clock, to generate a compare A signal when the dual-edge counter value matches the T16A_CCAX register. This makes it possible to control the duty ratio with double accuracy as compared to normal clock mode.

Setting HCM to 0 places T16A2 into normal clock mode. In normal clock mode, T16A2 generates a compare A signal when the T16A_TCx register value matches the T16A_CCAX register.

Notes: • T16A2 must be placed into comparator mode to set half clock mode, as it is effective only when PWM waveform is generated.

Be sure to set T16A2 to normal clock mode under a condition shown below.

(1) When T16A2 is placed into capture mode

(2) When TOUTAMD/T16A_CCCTLx register is set to 0x2 or 0x3

(3) When TOUTBMD/T16A_CCCTLx register is set to 0x2 or 0x3

- The dual-edge counter value cannot be read.
- Do not use the compare A interrupt in half clock mode.

D[5:4] **CCABCNT[1:0]: Counter Select Bits**

Selects a counter to be connected to the comparator/capture block of each channel in multi-comparator/capture mode (MULTIMD/T16A_CLK0 register = 1).

Table 10.8.4 Counter Selection

CCABCNT[1:0]	Counter channel
0x3	Ch.3 (Counter 3)
0x2	Ch.2 (Counter 2)
0x1	Ch.1 (Counter 1)
0x0	Ch.0 (Counter 0)

(Default: 0x0)

When using the T16A2 module in normal channel mode (T16AMULTIMD = 0), be sure to connect the counter of the same channel to each comparator/capture block.

D3 CBUFEN: Compare Buffer Enable Bit

Enables or disables writing to the compare buffer.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting CBUFEN to 1 enables the compare buffer. The compare A and B signals will be generated by comparing the counter values with the compare A and B buffer values instead of the compare A and B register values. The compare A and B register values written via software are loaded to the compare A and B buffers when the compare B signal is generated. Setting CBUFEN to 0 disables the compare buffer. The compare A and B signals will be generated by comparing the counter values with the compare A and B register values.

Note: Make sure the counter is halted (PRUN = 0) before setting CBUFEN.

D2 TRMD: Count Mode Select Bit

Selects the count mode.

1 (R/W): One-shot mode

0 (R/W): Repeat mode (default)

Setting TRMD to 0 sets the counter to repeat mode. In this mode, once the count starts, the counter continues counting until stopped by the application program.

Setting TRMD to 1 sets the counter to one-shot mode. In this mode, the counter stops counting automatically as soon as the compare B signal occurs.

D1 PRESET: Counter Reset Bit

Resets the counter.

1 (W): Reset

0 (W): Ignored

1 (R): Indicating that to be resetting

0 (R): Indicating that reset has completed (default)

Writing 1 to this bit resets the counter to 0. To reset the counter channel requires the counter clock.

D0 PRUN: Counter Run/Stop Control Bit

Starts/stops the count.

1 (W): Run

0 (W): Stop

1 (R): Counting

0 (R): Stopped (default)

The counter starts counting when PRUN is written as 1 and stops when written as 0. The counter data is retained even if the counter is stopped.

T16A Counter Ch.x Data Registers (T16A_TCx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16A Counter Ch.x Data Register (T16A_TCx)	0x5402 0x5422 0x5442 0x5462 (16 bits)	D15–0	T16ATC [15:0]	Counter data T16ATC15 = MSB T16ATC0 = LSB	0x0 to 0xffff	0x0	R	

D[15:0] T16ATC[15:0]: Counter Data Bits

Counter data can be read out. (Default: 0x0)

The counter value can be read out even if the counter is running. However, the counter value should be read at once using a 16-bit transfer instruction. If data is read twice using an 8-bit transfer instruction, the correct value may not be obtained due to occurrence of count up between readings.

T16A Comparator/Capture Ch.x Control Registers (T16A_CCCTLx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16A Comparator/Capture Ch.x Control Register (T16A_CCCTLx)	0x5404 0x5424 0x5444 0x5464 (16 bits)	D15–14	CAPBTRG [1:0]	Capture B trigger select	CAPBTRG[1:0] Trigger edge	0x0	R/W	
					0x3 ↑ and ↓			
					0x2 ↓			
					0x1 ↑			
					0x0 None			
		D13–12	TOUTBMD [1:0]	TOUT B mode select	TOUTBMD[1:0] Mode	0x0	R/W	
					0x3 cmp B: ↑ or ↓			
					0x2 cmp A: ↑ or ↓			
					0x1 cmp A: ↑, B: ↓			
					0x0 Off			
		D11–10	–	reserved	–	–	–	
D9	TOUTBINV	TOUT B invert	1 Invert	0 Normal	0	R/W		
D8	CCBMD	T16A_CCB register mode select	1 Capture	0 Comparator	0	R/W		
D7–6	CAPATRG [1:0]	Capture A trigger select	CAPATRG[1:0] Trigger edge	0x0	R/W			
			0x3 ↑ and ↓					
			0x2 ↓					
			0x1 ↑					
			0x0 None					
D5–4	TOUTAMD [1:0]	TOUT A mode select	TOUTAMD[1:0] Mode	0x0	R/W			
			0x3 cmp B: ↑ or ↓					
			0x2 cmp A: ↑ or ↓					
			0x1 cmp A: ↑, B: ↓					
			0x0 Off					
D3–2	–	reserved	–	–	–	–	0 when being read.	
D1	TOUTAINV	TOUT A invert	1 Invert	0 Normal	0	R/W		
D0	CCAMD	T16A_CCA register mode select	1 Capture	0 Comparator	0	R/W		

D[15:14] CAPBTRG[1:0]: Capture B Trigger Select Bits

Selects the trigger edge(s) of the external signal (CAP1/3/5/7) at which the counter value is captured in the capture B register.

Table 10.8.5 Capture B Trigger Edge Selection

CAPBTRG[1:0]	Trigger edge
0x3	Falling edge and rising edge
0x2	Falling edge
0x1	Rising edge
0x0	Not triggered

(Default: 0x0)

CAPBTRG[1:0] are control bits for capture mode and are ineffective in comparator mode.

D[13:12] TOUTBMD[1:0]: TOUT B Mode Select Bits

Configures how the TOUT B signal waveform (TOUT1/3/5/7 output) is changed by the compare A and compare B signals. These bits are also used to turn the TOUT B output On and Off.

Table 10.8.6 TOUT B Generation Mode

TOUTBMD[1:0]	When compare A occurs	When compare B occurs
0x3	No change	Toggle
0x2	Toggle	No change
0x1	Rise	Fall
0x0	Disable output	

(Default: 0x0)

TOUTBMD[1:0] are control bits for comparator mode and are ineffective in capture mode.

D[11:10] Reserved**D9 TOUTBINV: TOUT B Invert Bit**

Selects the TOUT B signal (TOUT1/3/5/7 output) polarity.

1 (R/W): Inverted (active Low)

0 (R/W): Normal (active High) (default)

Writing 1 to TOUTBINV generates an active Low signal (Off level = High) for the TOUT B output.

When TOUTBINV is 0, an active High signal (Off level = Low) is generated.

TOUTBINV is a control bit for comparator mode and is ineffective in capture mode.

D8 CCBMD: T16A_CCB Register Mode Select Bit

Selects the T16A_CCBx register function (comparator mode or capture mode).

1 (R/W): Capture mode

0 (R/W): Comparator mode (default)

Writing 1 to CCBMD configures the T16A_CCBx register as the capture B register (capture mode) to

which the counter data will be loaded by the external trigger signal. When CCBMD is 0, the T16A_

CCBx register functions as the compare B register (comparator mode) for writing a comparison value to

generate the compare B signal.

D[7:6] CAPATRG[1:0]: Capture A Trigger Select Bits

Selects the trigger edge(s) of the external signal (CAP0/2/4/6) at which the counter value is captured in the capture A register.

Table 10.8.7 Capture A Trigger Edge Selection

CAPATRG[1:0]	Trigger edge
0x3	Falling edge and rising edge
0x2	Falling edge
0x1	Rising edge
0x0	Not triggered

(Default: 0x0)

CAPATRG[1:0] are control bits for capture mode and are ineffective in comparator mode.

D[5:4] TOUTAMD[1:0]: TOUT A Mode Select Bits

Configures how the TOUT A signal waveform (TOUT0/2/4/6 output) is changed by the compare A and

compare B signals. These bits are also used to turn the TOUT A output On and Off.

Table 10.8.8 TOUT A Generation Mode

TOUTAMD[1:0]	When compare A occurs	When compare B occurs
0x3	No change	Toggle
0x2	Toggle	No change
0x1	Rise	Fall
0x0	Disable output	

(Default: 0x0)

TOUTAMD[1:0] are control bits for comparator mode and are ineffective in capture mode.

D[3:2] Reserved**D1 TOUTAINV: TOUT A Invert Bit**

Selects the TOUT A signal (TOUT0/2/4/6 output) polarity.

10 16-BIT PWM TIMERS (T16A2)

1 (R/W): Inverted (active Low)

0 (R/W): Normal (active High) (default)

Writing 1 to TOUTAINV generates an active Low signal (Off level = High) for the TOUT A output. When TOUTAINV is 0, an active High signal (Off level = Low) is generated.

TOUTAINV is a control bit for comparator mode and is ineffective in capture mode.

D0 CCAMD: T16A_CCA Register Mode Select Bit

Selects the T16A_CCAx register function (comparator mode or capture mode).

1 (R/W): Capture mode

0 (R/W): Comparator mode (default)

Writing 1 to CCAMD configures the T16A_CCAx register as the capture A register (capture mode) to which the counter data will be loaded by the external trigger signal. When CCAMD is 0, the T16A_CCAx register functions as the compare A register (comparator mode) for writing a comparison value to generate the compare A signal.

T16A Comparator/Capture Ch.x A Data Registers (T16A_CCAx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16A Comparator/ Capture Ch.x A Data Register (T16A_CCAx)	0x5406 0x5426 0x5446 0x5466 (16 bits)	D15-0	CCA[15:0]	Compare/capture A data CCA15 = MSB CCA0 = LSB	0x0 to 0xffff	0x0	R/W	

D[15:0] CCA[15:0]: Compare/Capture A Data Bits

In comparator mode (CCAMD/ T16A_CCCTLx register = 0)

Sets a compare A data, which will be compared with the counter value, through this register.

When CBUFEN/T16A_CTLx register is set to 0, accessing to this register directly read/write from/to the compare A register.

When CBUFEN is set to 1, accessing to this register read/write from/to the compare A buffer. The buffer contents are loaded into the compare A register when the counter is reset.

The data set is compared with the counter data. When the counter reaches the comparison value set, the compare A signal is asserted and a cause of compare A interrupt occurs. Furthermore, the TOUT output waveform changes when TOUTAMD[1:0]/T16A_CCCTLx register or TOUTBMD[1:0]/T16A_CCCTLx register is set to 0x2 or 0x1. These processes do not affect the counter data and the count up operation.

In capture mode (CCAMD = 1)

When the counter value is captured at the external trigger signal (CAP0/2/4/6) edge selected using CAPATRG[1:0]/T16A_CCCTLx register, the captured value is loaded to this register. At the same time a capture A interrupt can be generated, thus the captured counter value can be read out in the interrupt handler.

T16A Comparator/Capture Ch.x B Data Registers (T16A_CCBx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16A Comparator/ Capture Ch.x B Data Register (T16A_CCBx)	0x5408 0x5428 0x5448 0x5468 (16 bits)	D15-0	CCB[15:0]	Compare/capture B data CCB15 = MSB CCB0 = LSB	0x0 to 0xffff	0x0	R/W	

D[15:0] CCB[15:0]: Compare/Capture B Data Bits

In comparator mode (CCBMD/ T16A_CCCTLx register = 0)

Sets a compare B data, which will be compared with the counter value, through this register.

When CBUFEN/T16A_CTLx register is set to 0, accessing to this register directly read/write from/to the compare B register.

When CBUFEN is set to 1, accessing to this register write from/to the compare B buffer. The buffer contents are loaded into the compare B register when the compare B signal occurs. Compare B regis-

ter is accessed in input mode, regardless of how the CBUFEN is set.

The data set is compared with the counter data. When the counter reaches the comparison value set, the compare B signal is asserted and a cause of compare B interrupt occurs. The counter is reset to 0. Furthermore, the TOUT output waveform changes when TOUTAMD[1:0]/T16A_CCCTL_x register or TOUTBMD[1:0]/T16A_CCCTL_x register is set to 0x3 or 0x1.

In capture mode (CCBMD = 1)

When the counter value is captured at the external trigger signal (CAP1/3/5/7) edge selected using CAPBTRG[1:0]/T16A_CCCTL_x register, the captured value is loaded to this register. At the same time a capture B interrupt can be generated, thus the captured counter value can be read out in the interrupt handler.

T16A Comparator/Capture Ch.x Interrupt Enable Registers (T16A_IEN_x)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16A Comparator/ Capture Ch.x Interrupt Enable Register (T16A_IEN _x)	0x540a	D15–6	–	reserved	–	–	–	0 when being read.
	0x542a	D5	CAPBOWIE	Capture B overwrite interrupt enable	1 Enable 0 Disable	0	R/W	
	0x544a	D4	CAPAOWIE	Capture A overwrite interrupt enable	1 Enable 0 Disable	0	R/W	
	0x546a (16 bits)	D3	CAPBIE	Capture B interrupt enable	1 Enable 0 Disable	0	R/W	
		D2	CAPAIE	Capture A interrupt enable	1 Enable 0 Disable	0	R/W	
		D1	CBIE	Compare B interrupt enable	1 Enable 0 Disable	0	R/W	
		D0	CAIE	Compare A interrupt enable	1 Enable 0 Disable	0	R/W	

D[15:6] Reserved

D5 CAPBOWIE: Capture B Overwrite Interrupt Enable Bit

Enables or disables capture B overwrite interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting CAPBOWIE to 1 enables capture B overwrite interrupt requests to the ITC. Setting it to 0 disables interrupts.

D4 CAPAOWIE: Capture A Overwrite Interrupt Enable Bit

Enables or disables capture A overwrite interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting CAPAOWIE to 1 enables capture A overwrite interrupt requests to the ITC. Setting it to 0 disables interrupts.

D3 CAPBIE: Capture B Interrupt Enable Bit

Enables or disables capture B interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting CAPBIE to 1 enables capture B interrupt requests to the ITC. Setting it to 0 disables interrupts.

D2 CAPAIE: Capture A Interrupt Enable Bit

Enables or disables capture A interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting CAPAIE to 1 enables capture A interrupt requests to the ITC. Setting it to 0 disables interrupts.

D1 CBIE: Compare B Interrupt Enable Bit

Enables or disables compare B interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting CBIE to 1 enables compare B interrupt requests to the ITC. Setting it to 0 disables interrupts.

D0 CAIE: Compare A Interrupt Enable Bit

Enables or disables compare A interrupts.

10 16-BIT PWM TIMERS (T16A2)

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting CAIE to 1 enables compare A interrupt requests to the ITC. Setting it to 0 disables interrupts.

T16A Comparator/Capture Ch.x Interrupt Flag Registers (T16A_IFLGx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16A Comparator/ Capture Ch.x Interrupt Flag Register (T16A_IFLGx)	0x540c	D15–6	–	reserved	–	–	–	0 when being read.	
	0x542c	D5	CAPBOWIF	Capture B overwrite interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
	0x544c	D4	CAPAOWIF	Capture A overwrite interrupt flag			0	R/W	
	0x546c (16 bits)	D3	CAPBIF	Capture B interrupt flag			0	R/W	
		D2	CAPAIF	Capture A interrupt flag			0	R/W	
		D1	CBIF	Compare B interrupt flag			0	R/W	
		D0	CAIF	Compare A interrupt flag			0	R/W	

D[15:6] Reserved

D5 CAPBOWIF: Capture B Overwrite Interrupt Flag Bit

Indicates whether the cause of capture B overwrite interrupt has occurred or not.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

CAPBOWIF is a T16A2 interrupt flag that is set to 1 when the capture B register is overwritten.

CAPBOWIF is reset by writing 1.

D4 CAPAOWIF: Capture A Overwrite Interrupt Flag Bit

Indicates whether the cause of capture A overwrite interrupt has occurred or not.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

CAPAOWIF is a T16A2 interrupt flag that is set to 1 when the capture A register is overwritten.

CAPAOWIF is reset by writing 1.

D3 CAPBIF: Capture B Interrupt Flag Bit

Indicates whether the cause of capture B interrupt has occurred or not.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

CAPBIF is a T16A2 interrupt flag that is set to 1 when the counter value is captured in the capture B register.

CAPBIF is reset by writing 1.

D2 CAPAIF: Capture A Interrupt Flag Bit

Indicates whether the cause of capture A interrupt has occurred or not.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

CAPAIF is a T16A2 interrupt flag that is set to 1 when the counter value is captured in the capture A register.

CAPAIF is reset by writing 1.

D1 CBIF: Compare B Interrupt Flag Bit

Indicates whether the cause of compare B interrupt has occurred or not.

1 (R): Cause of interrupt has occurred

- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

CBIF is a T16A2 interrupt flag that is set to 1 when the counter reaches the value set in the compare B register.

CBIF is reset by writing 1.

D0 CAIF: Compare A Interrupt Flag Bit

Indicates whether the cause of compare A interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

CAIF is a T16A2 interrupt flag that is set to 1 when the counter reaches the value set in the compare A register.

CAIF is reset by writing 1.

11 Clock Timer (CT)

11.1 CT Module Overview

The S1C17706 includes a clock timer module (CT) that uses the OSC1 oscillator as its clock source. This timer can be used for generating cyclic interrupts to implement a software clock function.

The features of the CT module are listed below.

- 8-bit binary counter (128 Hz to 1 Hz)
- 32 Hz, 8 Hz, 2 Hz, and 1 Hz interrupts can be generated.

Figure 11.1.1 shows the CT configuration.

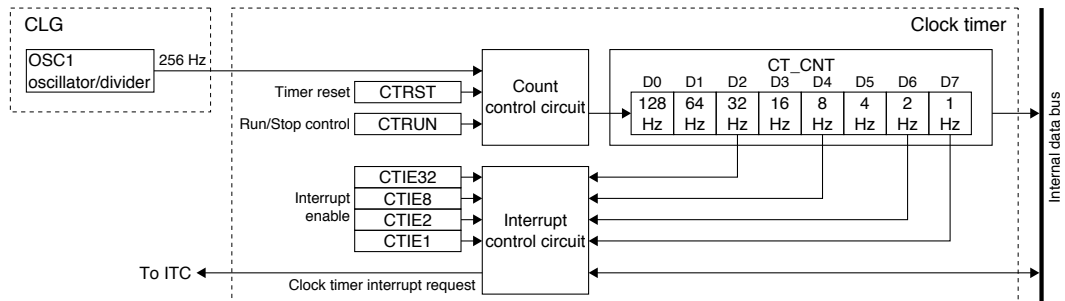


Figure 11.1.1 CT Configuration

The CT module consists of an 8-bit binary counter that uses the 256 Hz signal divided from the OSC1 clock as the input clock and allows data for each bit (128 Hz to 1 Hz) to be read out by software. The clock timer can also generate interrupts using the 32 Hz, 8 Hz, 2 Hz, and 1 Hz signals. This clock timer is normally used for various timing functions, such as a clock.

11.2 Operation Clock

The CT module uses the 256 Hz clock output by the CLG module as the operation clock. The CLG module generates this operation clock by dividing the OSC1 clock into 1/128, resulting in a frequency of 256 Hz when the OSC1 clock frequency is 32.768 kHz. The frequency described in this chapter will vary accordingly for other OSC1 clock frequencies.

The CLG module does not include a 256 Hz clock output control bit. The 256 Hz clock is normally supplied to the clock timer when the OSC1 oscillation is on.

For detailed information on OSC1 oscillator control, see the “Clock Generator (CLG)” chapter.

Note: The OSC1 oscillator must be turned on before the CT module can operate.

11.3 Timer Reset

Reset the timer by writing 1 to CTRST/CT_CTL register. This clears the counter to 0.

Apart from this operation, the counter is also cleared by an initial reset.

11.4 Timer RUN/STOP Control

Make the following settings before starting CT.

- (1) If using interrupts, set the interrupt level and enable interrupts for the clock timer. See Section 11.5.
- (2) Reset the timer. See Section 11.3.

The clock timer includes CTRUN/CT_CTL register for Run/Stop control.

11 CLOCK TIMER (CT)

The clock timer starts operating when 1 is written to CTRUN. Writing 0 to CTRUN disables clock input and stops the operation.

This control does not affect the counter (CT_CNT register) data. The counter data is retained even when the count is halted, allowing resumption of the count from that data.

If 1 is written to both CTRUN and CTRST simultaneously, the clock timer starts counting after resetting.

An cause of interrupt occurs during counting at the 32 Hz, 8 Hz, 2 Hz, and 1 Hz signal falling edges. If interrupts are enabled, an interrupt request is sent to the interrupt controller (ITC).

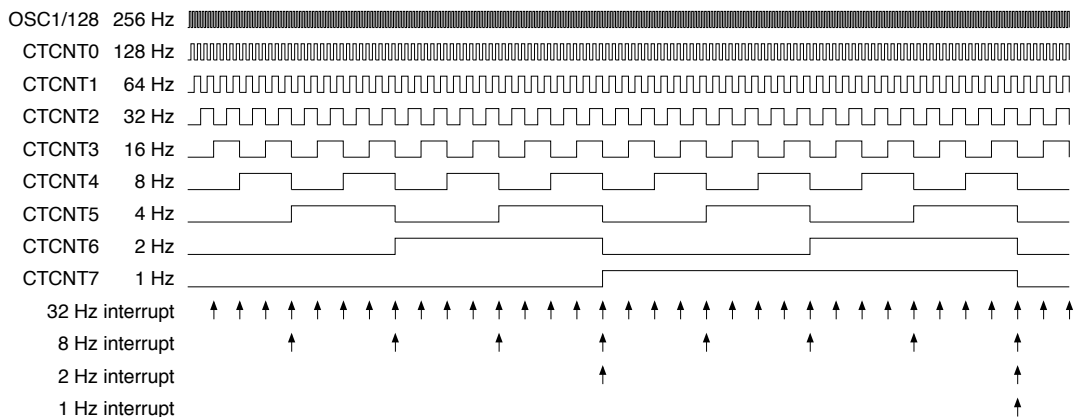


Figure 11.4.1 Clock Timer Timing Chart

- Notes:**
- The clock timer switches to Run/Stop status synchronized with the 256 Hz signal falling edge after data is written to CTRUN. When 0 is written to CTRUN, the timer stops after counting an additional "+1." 1 is retained for CTRUN reading until the timer actually stops. Figure 11.4.2 shows the Run/Stop control timing chart.

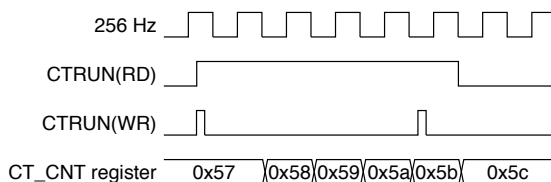


Figure 11.4.2 Run/Stop Control Timing Chart

- Executing the `s1p` instruction while the timer is running (CTRUN = 1) will destabilize the timer operation during restarting from SLEEP status. When switching to SLEEP status, stop the timer (CTRUN = 0) before executing the `s1p` instruction.

11.5 CT Interrupts

The CT module includes functions for generating the following four kinds of interrupts: 32 Hz, 8 Hz, 2 Hz, and 1 Hz interrupts

The CT module outputs a single interrupt signal shared by the above four interrupt causes to the interrupt controller (ITC). The interrupt flag in the CT module should be read to identify the cause of interrupt that occurred.

32 Hz, 8 Hz, 2 Hz, and 1 Hz interrupts

The 32 Hz, 8 Hz, 2 Hz, and 1 Hz signal falling edges set the corresponding interrupt flag in the CT module to 1. At the same time, an interrupt request is sent to the ITC if the corresponding interrupt enable bit has been set to 1 (interrupt enabled). An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied. If the interrupt enable bit is set to 0 (interrupt disabled, default), no interrupt request will be sent to the ITC.

Table 11.5.1 CT Interrupt Flags and Interrupt Enable Bits

Cause of interrupt	Interrupt flag	Interrupt enable bit
32 Hz Interrupt	CTIF32/CT_IFLG register	CTIE32/CT_IMSK register
8 Hz Interrupt	CTIF8/CT_IFLG register	CTIE8/CT_IMSK register
2 Hz Interrupt	CTIF2/CT_IFLG register	CTIE2/CT_IMSK register
1 Hz Interrupt	CTIF1/CT_IFLG register	CTIE1/CT_IMSK register

For specific information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- The CT module interrupt flag must be reset in the interrupt handler routine after a CT interrupt has occurred to prevent recurring interrupts.
 - Reset the interrupt flag before enabling CT interrupts with the interrupt enable bit to prevent occurrence of unwanted interrupt. The interrupt flag is reset by writing 1.

11.6 Control Register Details

Table 11.6.1 List of CT Registers

Address	Register name		Function
0x5000	CT_CTL	Clock Timer Control Register	Resets and starts/stops the timer.
0x5001	CT_CNT	Clock Timer Counter Register	Counter data
0x5002	CT_IMSK	Clock Timer Interrupt Mask Register	Enables/disables interrupt.
0x5003	CT_IFLG	Clock Timer Interrupt Flag Register	Indicates/resets interrupt occurrence status.

The CT registers are described in detail below. These are 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

Clock Timer Control Register (CT_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Clock Timer Control Register (CT_CTL)	0x5000 (8 bits)	D7–5	–	reserved	–	–	–	0 when being read.	
		D4	CTRST	Clock timer reset	1 Reset	0 Ignored	0		W
		D3–1	–	reserved	–	–	–		–
		D0	CTRUN	Clock timer run/stop control	1 Run	0 Stop	0		R/W

D[7:5] Reserved

D4 CTRST: Clock Timer Reset Bit

Resets the clock timer.

1 (W): Reset

0 (W): Ignored

0 (R): Always 0 when read (default)

Writing 1 to this bit resets the counter to 0x0. When reset in Run state, the clock timer restarts immediately after resetting. The reset data 0x0 is retained when in Stop state.

D[3:1] Reserved

D0 CTRUN: Clock Timer Run/Stop Control Bit

Controls the clock timer Run/Stop.

1 (R/W): Run

0 (R/W): Stop (default)

The clock timer starts counting when CTRUN is written as 1 and stops when written as 0. The counter data is retained at Stop state until a reset or the next Run state.

Clock Timer Counter Register (CT_CNT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Clock Timer Counter Register (CT_CNT)	0x5001 (8 bits)	D7-0	CTCNT[7:0]	Clock timer counter value	0x0 to 0xff	0x0	R	

D[7:0] CTCNT[7:0]: Clock Timer Counter Value

The counter data can be read out. (Default: 0x0)

This register is read-only and cannot be written to.

The bits correspond to various frequencies, as follows:

D7: 1 Hz, D6: 2 Hz, D5: 4 Hz, D4: 8 Hz, D3: 16 Hz, D2: 32 Hz, D1: 64 Hz, D0: 128 Hz

Note: The correct counter value may not be read out (reading is unstable) if the register is read while counting is underway. Read the counter register twice in succession and treat the value as valid if the values read are identical.

Clock Timer Interrupt Mask Register (CT_IMSK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Clock Timer Interrupt Mask Register (CT_IMSK)	0x5002 (8 bits)	D7-4	–	reserved	–	–	–	0 when being read.
		D3	CTIE32	32 Hz interrupt enable	1 Enable 0 Disable	0	R/W	
		D2	CTIE8	8 Hz interrupt enable	1 Enable 0 Disable	0	R/W	
		D1	CTIE2	2 Hz interrupt enable	1 Enable 0 Disable	0	R/W	
		D0	CTIE1	1 Hz interrupt enable	1 Enable 0 Disable	0	R/W	

This register enables or disables interrupt requests individually for the 32 Hz, 8 Hz, 2 Hz, and 1 Hz signals. Setting CTIE* to 1 enables CT interrupts for the corresponding frequency signal falling edge, while setting to 0 disables interrupts.

D[7:4] Reserved

D3 CTIE32: 32 Hz Interrupt Enable Bit

Enables or disables 32 Hz interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D2 CTIE8: 8 Hz Interrupt Enable Bit

Enables or disables 8 Hz interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D1 CTIE2: 2 Hz Interrupt Enable Bit

Enables or disables 2 Hz interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D0 CTIE1: 1 Hz Interrupt Enable Bit

Enables or disables 1 Hz interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Clock Timer Interrupt Flag Register (CT_IFLG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Clock Timer Interrupt Flag Register (CT_IFLG)	0x5003 (8 bits)	D7-4	--	reserved				0 when being read.	
		D3	CTIF32	32 Hz interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
		D2	CTIF8	8 Hz interrupt flag			0	R/W	
		D1	CTIF2	2 Hz interrupt flag			0	R/W	
		D0	CTIF1	1 Hz interrupt flag			0	R/W	

This register indicates the occurrence state of interrupt causes due to 32 Hz, 8 Hz, 2 Hz, and 1 Hz signals. If a CT interrupt occurs, identify the interrupt cause (frequency) by reading the interrupt flag in this register. CTIF* is a CT module interrupt flag that is set to 1 at the falling edge of the corresponding 32 Hz, 8 Hz, 2 Hz, or 1 Hz interrupt. CTIF* is reset by writing 1.

D[7:4] Reserved

D3 CTIF32: 32 Hz Interrupt Flag Bit

Indicates whether the cause of 32 Hz interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

D2 CTIF8: 8 Hz Interrupt Flag Bit

Indicates whether the cause of 8 Hz interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

D1 CTIF2: 2 Hz Interrupt Flag Bit

Indicates whether the cause of 2 Hz interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

D0 CTIF1: 1 Hz Interrupt Flag Bit

Indicates whether the cause of 1 Hz interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

12 Stopwatch Timer (SWT)

12.1 SWT Module Overview

The S1C17706 includes a 1/100-second stopwatch timer module (SWT) that uses the OSC1 oscillator as its clock source. This timer can be used to implement a software stopwatch function.

The features of the SWT module are listed below.

- Two 4-bit BCD counters (approximately 1/100 and 1/10-second counters)
- Approximately 100 Hz, approximately 10 Hz, and 1 Hz interrupts can be generated.

Figure 12.1.1 shows the SWT configuration.

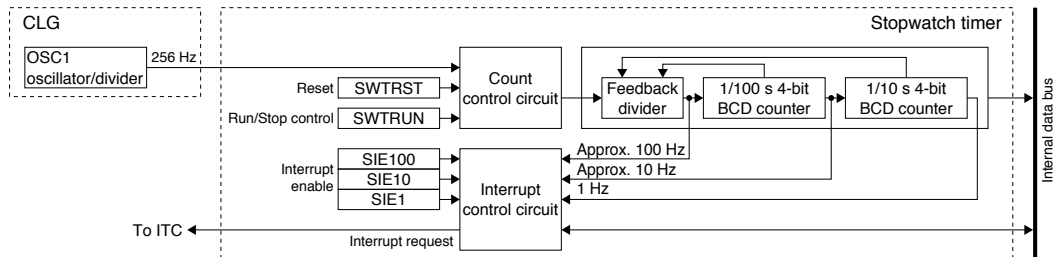


Figure 12.1.1 SWT Configuration

The SWT module consists of two 4-bit BCD counters (1/100 and 1/10 second) that use the 256 Hz signal divided from the OSC1 clock as the input clock and allows count data to be read out by software.

The SWT module can also generate interrupts using the 100 Hz (approximately 100 Hz), 10 Hz (approximately 10 Hz), and 1 Hz signals.

12.2 Operation Clock

The SWT module uses the 256 Hz clock output by the CLG module as the operation clock. The CLG module generates this operation clock by dividing the OSC1 clock into 1/128, resulting in a frequency of 256 Hz when the OSC1 clock frequency is 32.768 kHz. The frequency described in this chapter will vary accordingly for other OSC1 clock frequencies. The CLG module does not include a 256 Hz clock output control bit. The 256 Hz clock is normally supplied to the SWT module when the OSC1 oscillation is on.

For detailed information on OSC1 oscillator control, see the “Clock Generator (CLG)” chapter.

Note: The OSC1 oscillator must be turned on before the SWT module can operate.

12.3 BCD Counters

The SWT module consists of 1/100-second and 1/10-second 4-bit BCD counters.

The 1/100-second and 1/10-second counter values can be read from BCD100[3:0]/SWT_BCNT register and BCD10[3:0]/SWT_BCNT register, respectively.

Count-up Pattern

A feedback divider is used to generate 100 Hz, 10 Hz, and 1 Hz signals from the 256 Hz clock. The counter count-up pattern varies as shown in Figure 12.3.1.

12 STOPWATCH TIMER (SWT)

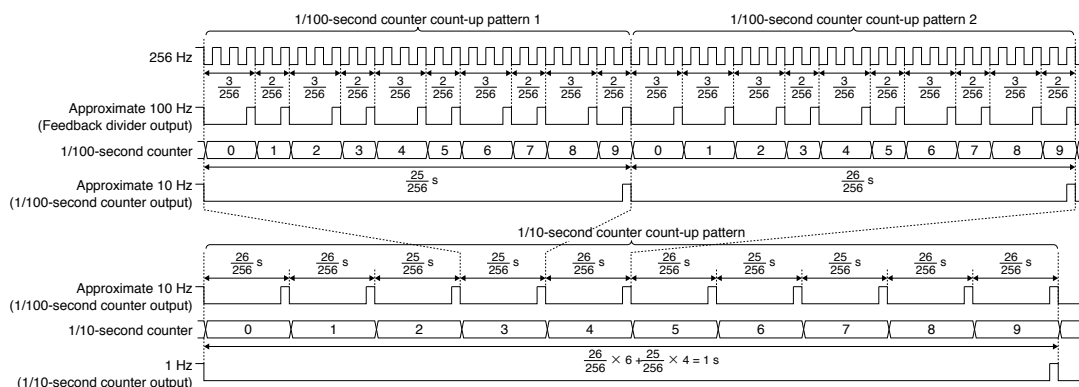


Figure 12.3.1 SWT Count-Up Patterns

The feedback divider generates an approximate 100 Hz signal at $2/256$ -second and $3/256$ -second intervals from the 256 Hz signal supplied from the CLG module.

The 1/100-second counter counts the approximate 100 Hz signal output by the feedback divider and generates an approximate 10 Hz signal at $25/256$ -second and $26/256$ -second intervals. Count-up will be pseudo 1/100-second counting at $2/256$ -second and $3/256$ -second intervals.

The 1/10-second counter counts the approximate 10 Hz signal generated by the 1/100-second counter at a ratio of 4:6, and generates a 1 Hz signal. Count-up will be pseudo 1/10-second counting at $25/256$ -second and $26/256$ -second intervals.

12.4 Timer Reset

Reset the SWT module by writing 1 to SWTRST/SWT_CTL register. This clears the counter to 0. Apart from this operation, the counter is also cleared by initial reset.

12.5 Timer RUN/STOP Control

Make the following settings before starting SWT.

- (1) If using interrupts, set the interrupt level and enable interrupts for the SWT module. See Section 12.6.
- (2) Reset the timer. See Section 12.4.

The SWT module includes SWTRUN/SWT_CTL register for Run/Stop control.

The timer starts operating when 1 is written to SWTRUN. Writing 0 to SWTRUN disables clock input and stops the operation. This control does not affect the counter (SWT_BCNT register) data. The counter data is retained even when the count is halted, allowing resumption of the count from that data. If 1 is written to both SWTRUN and SWTRST simultaneously, the timer starts counting after resetting.

An cause of interrupt occurs during counting at the 100 Hz (approximate 100 Hz), 10 Hz (approximate 10 Hz), and 1 Hz signal falling edges. If interrupts are enabled, an interrupt request is sent to the interrupt controller (ITC).

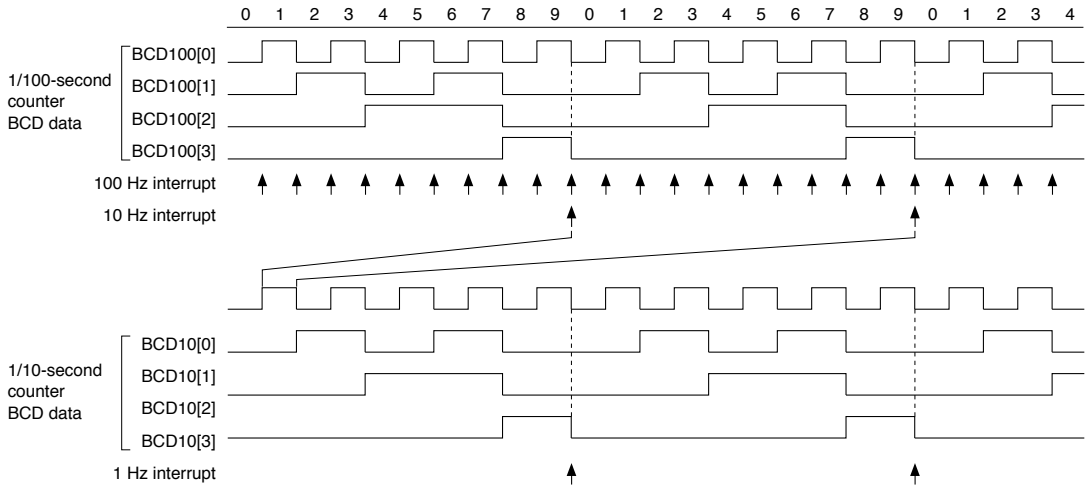


Figure 12.5.1 SWT Timing Chart

- Notes:**
- The timer switches to Run/Stop status synchronized with the 256 Hz signal falling edge after data is written to SWTRUN. When 0 is written to SWTRUN, the timer stops after counting an additional “+1.” 1 is retained for SWTRUN reading until the timer actually stops. Figure 12.5.2 shows the Run/Stop control timing chart.

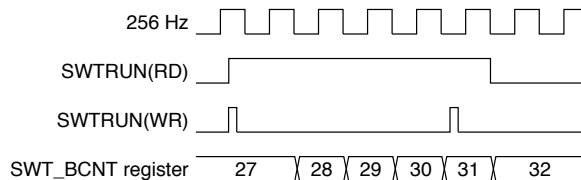


Figure 12.5.2 Run/Stop Control Timing Chart

- Executing the `s1p` instruction while the timer is running (`SWTRUN = 1`) will destabilize the timer operation during restarting from SLEEP status. When switching to SLEEP status, stop the timer (`SWTRUN = 0`) before executing the `s1p` instruction.

12.6 SWT Interrupts

The SWT module includes functions for generating the following three kinds of interrupts:
100 Hz, 10 Hz, and 1 Hz interrupts

The SWT module outputs a single interrupt signal shared by the above three interrupt causes to the interrupt controller (ITC). The interrupt flag in the SWT module should be read to identify the cause of interrupt that occurred.

100 Hz, 10 Hz, 1 Hz interrupts

The 100 Hz (approximate 100 Hz), 10 Hz (approximate 10 Hz), and 1 Hz signal falling edges set the corresponding interrupt flag in the SWT module to 1. At the same time, an interrupt request is sent to the ITC if the corresponding interrupt enable bit has been set to 1 (interrupt enabled). An interrupt is generated if the ITC and SIC17 Core interrupt conditions are satisfied.

If the interrupt enable bit is set to 0 (interrupt disabled, default), no interrupt request will be sent to the ITC.

Table 12.6.1 SWT Interrupt Flags and Interrupt Enable Bits

Cause of interrupt	Interrupt flag	Interrupt enable bit
100 Hz Interrupt	SIF100/SWT_IFLG register	SIE100/SWT_IMSK register
10 Hz Interrupt	SIF10/SWT_IFLG register	SIE10/SWT_IMSK register
1 Hz Interrupt	SIF1/SWT_IFLG register	SIE1/SWT_IMSK register

For specific information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- The SWT module interrupt flag must be reset in the interrupt handler routine after a stopwatch timer interrupt has occurred to prevent recurring interrupts.
 - Reset the interrupt flag before enabling SWT interrupts with the interrupt enable bit to prevent occurrence of unwanted interrupt. The interrupt flag is reset by writing 1.

12.7 Control Register Details

Table 12.7.1 List of SWT Registers

Address	Register name	Function
0x5020	SWT_CTL	Stopwatch Timer Control Register
0x5021	SWT_BCNT	Stopwatch Timer BCD Counter Register
0x5022	SWT_IMSK	Stopwatch Timer Interrupt Mask Register
0x5023	SWT_IFLG	Stopwatch Timer Interrupt Flag Register

The SWT registers are described in detail below. These are 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

Stopwatch Timer Control Register (SWT_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Stopwatch Timer Control Register (SWT_CTL)	0x5020 (8 bits)	D7-5	–	reserved	–	–	–	0 when being read.	
		D4	SWTRST	Stopwatch timer reset	1 Reset	0 Ignored	0		W
		D3-1	–	reserved	–	–	–		–
		D0	SWTRUN	Stopwatch timer run/stop control	1 Run	0 Stop	0		R/W

D[7:5] Reserved

D4 SWTRST: Stopwatch Timer Reset Bit

Resets the SWT module.

1 (W): Reset

0 (W): Ignored

0 (R): Always 0 when read (default)

Writing 1 to this bit resets the counter to 0x0. When reset in Run state, the timer restarts immediately after resetting. The reset data 0x0 is retained when in Stop state.

D[3:1] Reserved

D0 SWTRUN: Stopwatch Timer Run/Stop Control Bit

Controls the timer Run/Stop.

1 (R/W): Run

0 (R/W): Stop (default)

The timer starts counting when SWTRUN is written as 1 and stops when written as 0. The counter data is retained at Stop state until a reset or the next Run state.

Stopwatch Timer BCD Counter Register (SWT_BCNT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Stopwatch Timer BCD Counter Register (SWT_BCNT)	0x5021 (8 bits)	D7-4	BCD10[3:0]	1/10 sec. BCD counter value	0 to 9	0	R	
		D3-0	BCD100[3:0]	1/100 sec. BCD counter value	0 to 9	0	R	

D[7:4] BCD10[3:0]: 1/10 Sec. BCD Counter Value Bit

The 1/10-second counter BCD data can be read out. (Default: 0)

This register is read-only and cannot be written to.

D[3:0] BCD100[3:0]: 1/100 Sec. BCD Counter Value Bit

The 1/100-second counter BCD data can be read out. (Default: 0)

This register is read-only and cannot be written to.

Note: The correct counter value may not be read out (reading is unstable) if the register is read while counting is underway. Read the counter register twice in succession and treat the value as valid if the values read are identical.

Stopwatch Timer Interrupt Mask Register (SWT_IMSK)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks	
Stopwatch Timer Interrupt Mask Register (SWT_IMSK)	0x5022 (8 bits)	D7-3	-	reserved	-		-	-	0 when being read.	
		D2	SIE1	1 Hz interrupt enable	1	Enable	0	Disable	0	R/W
		D1	SIE10	10 Hz interrupt enable	1	Enable	0	Disable	0	R/W
		D0	SIE100	100 Hz interrupt enable	1	Enable	0	Disable	0	R/W

This register enables or disables interrupt requests individually for the 100 Hz, 10 Hz, and 1 Hz signals. Setting SIE* to 1 enables SWT interrupts for the corresponding frequency signal falling edge, while setting to 0 disables interrupts.

D[7:3] Reserved

D2 SIE1: 1 Hz Interrupt Enable Bit

Enables or disables 1 Hz interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D1 SIE10: 10 Hz Interrupt Enable Bit

Enables or disables 10 Hz interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D0 SIE100: 100 Hz Interrupt Enable Bit

Enables or disables 100 Hz interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Stopwatch Timer Interrupt Flag Register (SWT_IFLG)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks
Stopwatch Timer Interrupt Flag Register (SWT_IFLG)	0x5023 (8 bits)	D7-3	--	reserved			--	--	0 when being read.
		D2	SIF1	1 Hz interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
		D1	SIF10	10 Hz interrupt flag			0	R/W	
		D0	SIF100	100 Hz interrupt flag			0	R/W	

This register indicates the occurrence state of interrupt causes due to 100 Hz, 10 Hz, and 1 Hz signals. If an SWT interrupt occurs, identify the interrupt cause (frequency) by reading the interrupt flag in this register. SIF* is an SWT module interrupt flag that is set to 1 at the falling edge of the corresponding 100 Hz, 10 Hz, or 1 Hz interrupt. SIF* is reset by writing 1.

D[7:3] Reserved

D2 SIF1: 1 Hz Interrupt Flag Bit

Indicates whether the cause of 1 Hz interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

D1 SIF10: 10 Hz Interrupt Flag Bit

Indicates whether the cause of 10 Hz interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

D0 SIF100: 100 Hz Interrupt Flag Bit

Indicates whether the cause of 100 Hz interrupt has occurred or not.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

13 Real-Time Clock (RTC2)

13.1 Real-Time Clock Module Overview

The S1C17706 incorporates a real-time clock (RTC2) with a perpetual calendar.

The main features of the real-time clock are outlined below.

- Contains time counters (seconds, minutes, and hours) and calendar counters (days, days of the week, months, and year). (Supports leap years)
- BCD data can be read from and written to both counters.
- With the hold function, the counter value can be read without the risk of carry over.
- Capable of controlling the starting and stopping of time clocks.
- Contains a software reset of adjusting clock time and other actions.
- 24-hour or 12-hour mode can be selected.
- Contains a 30-second correction function via software.
- Interrupt period can be occurred from 1/32-second, 1/8-second, 1/2-second, 1-second, 1-minute, 1-hour or 1-day.

Figure 13.1.1 shows a configuration diagram of the real-time clock.

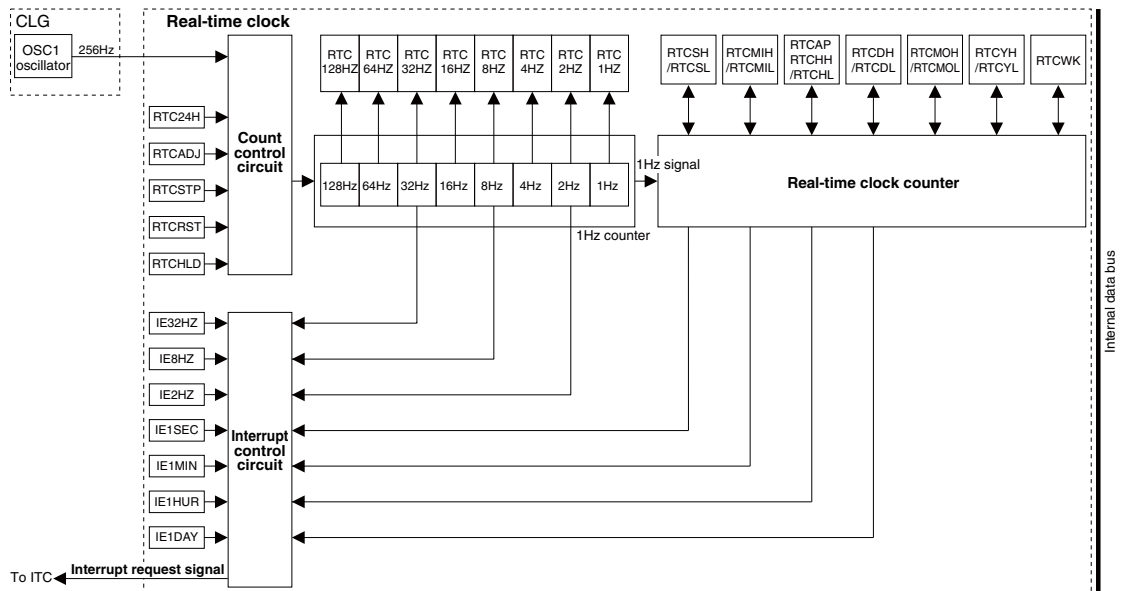


Figure 13.1.1 Configuration Diagram of Real-Time Clock

13.2 Operation Clock

The RTC2 module uses the 256 Hz clock output by the CLG module as the operation clock. The CLG module generates this operation clock by dividing the OSC1 clock into 1/128, resulting in a frequency of 256 Hz when the OSC1 clock frequency is 32.768 kHz. The frequency described in this chapter will vary accordingly for other OSC1 clock frequencies.

The CLG module does not include a 256 Hz clock output control bit. The 256 Hz clock is normally supplied to the clock timer when the OSC1 oscillation is on.

For detailed information on OSC1 oscillator control, see the “Clock Generator (CLG)” chapter.

Note: The OSC1 oscillator must be turned on before the RTC2 module can operate.

13.3 Real-Time Clock Control

13.3.1 Real-Time Clock Counter Settings

The real-time clock contains the 13 counters which are 1-second, 10-second, 1-minute, 10-minute, 1-hour, 10-hour, 1-day, 10-day, 1-month, 10-month, 1-year, 10-year and days of week. And whose count values can be read out as BCD data from the respective registers. Each counter can also be set to any desired date and time by writing data to the respective register.

Initial counter values

When initially reset, the counter is set at AM 12:00:00 on Sunday, January 1, 2000.

About detection of leap years

The algorithm used in the real-time clock to detect leap years is for Anno Domini (A.D.) only, and can automatically identify leap years up to the year 2099.

Years (0 to 99) without a remainder when divided by 4 are considered leap years. When the 1-year and 10-year counters both are 0, a common year is assumed. (A leap year of the year 2000 is not supported.)

Reading counters

In order to prevent carry over during reading counters, perform the counter read by one of the following methods:

- (1) When RTCBSY/RTC_CNTL2 register is 0, set 1 to RTCHLD/RTC_CNTL2 register and read out.
- (2) Read out the data twice and make sure that the value matches.

Writing counters

If 1 is carried over when writing the counters, the counter value may be corrupted. In order to prevent it, make sure that RTCBSY/RTC_CNTL2 is set to 0 before writing.

Note: When setting the value exceeding the effective range to the year, days of the week, hour (24H mode), minute and second counters, this clears to 0 at the next count up timing. And when setting the value exceeding the effective range to the month, day and hour (12H mode), this clears to 1 at the next count up timing.

13.3.2 Real-Time Clock RUN

Make the following settings to run the real-time clock counters.

- (1) Set the calendar and time counters.
- (2) When using interrupts, clear the interrupt causes, set the interrupt level and enable interrupts.
- (3) Start counting after setting RTCSTP/RTC_CNTL0 register to 0.
- (4) According to the time signal, reset the counter not exceeding 1 Hz after setting RTCRST/RTC_CNT0 register to 1. Or execute the 30-second correction after setting RTCADJ/RTC_CNT0 register to 1.

13.4 Real-Time Clock Interrupts

The real-time clock has 6 functions to generate interrupts listed below.

- 1-day interrupt
- 1-hour interrupt
- 1-minute interrupt
- 1-second interrupt
- 1/2-second interrupt
- 1/8-second interrupt
- 1/32-second interrupt

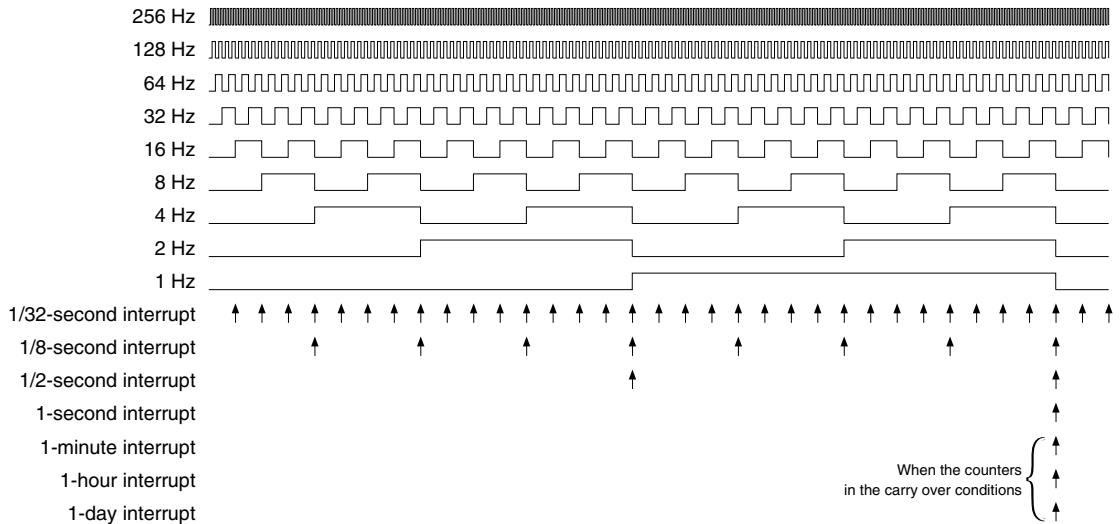


Figure 13.4.1 Real-Time Clock Interrupt Timing Chart

Real-time clock module outputs a single interrupt signal shared by the above six interrupt causes to the interrupt controller (ITC). Read the interrupt flags in the real-time clock module to identify the interrupt cause that has been occurred.

For details on how to control the ITC, see the “Interrupt Controller (ITC)” chapter.

Note: The timing of generation of the 1-second or less interrupt arises 1/256 second after the count up of the RTC_1Hz register.

13.5 Details of Control Registers

Table 13.5.1 List of Real-Time Clock Registers

Address	Register name		Function
0x5140	RTC_IFLG	RTC Interrupt Flag Register	Indicates/resets real-time clock occurrence status.
0x5141	RTC_IMSK	RTC Interrupt Mask Register	Sets up real-time clock interrupt mask.
0x5142	RTC_CNTL0	RTC Control 0 Register	Controls the real-time clock.
0x5143	RTC_CNTL1	RTC Control 1 Register	
0x5144	RTC_SEC	RTC Second Register	Second counter data
0x5145	RTC_MIN	RTC Minute Register	Minute counter data
0x5146	RTC_HOUR	RTC Hour Register	Hour counter data
0x5147	RTC_DAY	RTC Day Register	Day counter data
0x5148	RTC_MONTH	RTC Month Register	Month counter data
0x5149	RTC_YEAR	RTC Year Register	Year counter data
0x514a	RTC_WEEK	RTC Week Register	Days of week counter data
0x514b	RTC_1HZ	RTC 1Hz Register	1-second or less counter data

The following describes each real-time clock register. These are all 8-bit registers.

Note: When data is written to the register, the “Reserved” bits must always be written as 0 and not 1.

RTC Interrupt Flag Register (RTC_IFLG)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks		
RTC Interrupt Flag Register (RTC_IFLG)	0x5140 (8 bits)	D7	--	reserved	--		0	R	0 when being read.		
		D6	IF1DAY	1 day INT flag	1	Occurred	0	Not occurred	0	R/W	Reset by writing 1.
		D5	IF1HUR	1 hour INT flag							
		D4	IF1MIN	1 minute INT flag							
		D3	IF1SEC	1 second INT flag							
		D2	IF2HZ	1/2 second INT flag							
		D1	IF8HZ	1/8 second INT flag							
		D0	IF32HZ	1/32 second INT flag							

This register indicates the occurrence state of interrupt causes due to 1-day, 1-hour, 1-minute, 1-second, 1/8-second and 1/32-second signals of the real-time clock module. If a real-time clock interrupt occurs, identify the interrupt cause (frequency) by reading the interrupt flag in this register. IF* is a real-time clock module interrupt flag that is set to 1 at the falling edge of the corresponding 1-day, 1-hour, 1-minute, 1-second, 1/8-second and 1/32-second interrupt. IF* is reset by writing 1.

D7 Reserved

D6 IF1DAY: 1 day INT flag

This bit indicates whether a cause of 1-day interrupt occurred as follows:

- 1 (R): Cause of interrupt occurred
- 0 (R): No cause of interrupt occurred (software reset value)
- 1 (W): Resets this bit to 0
- 0 (W): Has no effect

D5 IF1HUR: 1 hour INT flag

This bit indicates whether a cause of 1-hour interrupt occurred as follows:

- 1 (R): Cause of interrupt occurred
- 0 (R): No cause of interrupt occurred (software reset value)
- 1 (W): Resets this bit to 0
- 0 (W): Has no effect

D4 IF1MIN: 1 minute INT flag

This bit indicates whether a cause of 1-minute interrupt occurred as follows:

- 1 (R): Cause of interrupt occurred
- 0 (R): No cause of interrupt occurred (software reset value)
- 1 (W): Resets this bit to 0
- 0 (W): Has no effect

D3 IF1SEC: 1 second INT flag

This bit indicates whether a cause of 1-second interrupt occurred as follows:

- 1 (R): Cause of interrupt occurred
- 0 (R): No cause of interrupt occurred (software reset value)
- 1 (W): Resets this bit to 0
- 0 (W): Has no effect

D2 IF2HZ: 1/2 second INT flag

This bit indicates whether a cause of 1/2-second interrupt occurred as follows:

- 1 (R): Cause of interrupt occurred
- 0 (R): No cause of interrupt occurred (software reset value)
- 1 (W): Resets this bit to 0
- 0 (W): Has no effect

D1 IF8HZ: 1/8 second INT flag

This bit indicates whether a cause of 1/8-second interrupt occurred as follows:

- 1 (R): Cause of interrupt occurred
- 0 (R): No cause of interrupt occurred (software reset value)
- 1 (W): Resets this bit to 0
- 0 (W): Has no effect

D0 IE32HZ: 1/32 second INT flag

This bit indicates whether a cause of 1/32-second interrupt occurred as follows:

- 1 (R): Cause of interrupt occurred
- 0 (R): No cause of interrupt occurred (software reset value)
- 1 (W): Resets this bit to 0
- 0 (W): Has no effect

RTC Interrupt Mask Register (RTC_IMSK)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks		
RTC Interrupt Mask Register (RTC_IMSK)	0x5141 (8 bits)	D7	–	reserved	–		0	R	0 when being read.		
		D6	IE1DAY	1 day interrupt enable	1	Enable	0	Disable	0	R/W	Reset by writing 1.
		D5	IE1HUR	1 hour interrupt enable							
		D4	IE1MIN	1 minute interrupt enable							
		D3	IE1SEC	1 second interrupt enable							
		D2	IE2HZ	1/2 second interrupt enable							
		D1	IE8HZ	1/8 second interrupt enable							
		D0	IE32HZ	1/32 second interrupt enable							

This register enables or disables interrupt requests individually for the 1-day, 1-hour, 1-second, 1/8-second and 1/32-second signals of the real-time clock module.

D7 Reserved**D6 IE1DAY: 1 day interrupt enable**

Enables or disables 1-day signal interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D5 IE1HUR: 1 hour interrupt enable

Enables or disables 1-hour signal interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D4 IE1MIN: 1 minute interrupt enable

Enables or disables 1-minute signal interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D3 IE1SEC: 1 second interrupt enable

Enables or disables 1-second signal interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D2 IE2HZ: 1/2 second interrupt enable

Enables or disables 1/2-second signal interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D1 IE8HZ: 1/8 second interrupt enable

Enables or disables 1/8-second signal interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D0 IE32HZ: 1/32 second interrupt enable

Enables or disables 1/32-second signal interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

RTC Control 0 Register (RTC_CNTL0)

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks	
RTC Control 0 Register (RTC_CNTL0)	0x5142 (8 bits)	D7-5	--	reserved	--			0	R	0 when being read.	
		D4	RTC24H	24H/12H mode select	1	24H	0	12H	0	R/W	
		D3	--	reserved	--			0	R	0 when being read.	
		D2	RTCADJ	30-second adjustment	1	Adjust (auto clear)	0	Ignore	0	R/W	
		D1	RTCSTP	Counter run/stop control	1	Stop	0	Run	1	R/W	
D0	RTCRCST	Software reset	1	Reset (auto clear)	0	Ignore	0	R/W			

D[7:5] Reserved

D4 RTC24H: 24H/12H Mode Select Bit

This bit selects whether to use the hour counter in 24-hour or 12-hour mode.

1 (R/W): 24-hour mode

0 (R/W): 12-hour mode

The count range of hour counters changes with this selection. However, the counter value will remain unchanged automatically by the selection.

Note: Make sure the counter is halted before changing the settings of RTC24H.

D3 Reserved

D2 RTCADJ: 30-second Adjustment Bit

This bit executes 30-second correction.

1 (W): Execute 30-second correction

0 (W): Has no effect

1 (R): 30-second correction being executed

0 (R): 30-second correction completed (not being executed) (software reset value)

The 30-second adjustment adds one minute when the clock time is 30 to 59 seconds. When the clock time is 0 to 29 seconds, this adjustment function does not add a value but sets the second value to zero. This function may be used to round up seconds to minutes when resetting seconds in an application.

Note: Writing the counters while RTCADJ = 1 is prohibited. Do not write 1 again while RTCADJ is 1.

D1 RTCSTP: Divider Run/Stop Control Bit

This bit starts or stops the real-time clock counter. It also indicates divider operating status.

1 (R/W): Stop divider/counters

0 (R/W): Start divider/counters

Setting this bit to 0 starts the divider; setting it to 1 stops the divider. If stopped, the counter data is kept until the next running state is started by the reset. However, this bit does not stop the clocks below 256 Hz.

D0 RTCRCST: Software Reset Bit

This function is expected to be used for clock time adjustment. This bit initializes counters of 1Hz or less and the RTCADJ and RTCHLD register values.

1 (R/W): Reset

0 (R/W): Negate reset

Perform the software reset with writing 1, then automatically returns to 0 after resetting.

RTC Control 1 Register (RTC_CNTL1)

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks	
RTC Control 1 Register (RTC_CNTL1)	0x5143 (8 bits)	D7-2	--	reserved	--			0	R	0 when being read.	
		D1	RTCBSY	Counter busy flag	1	Busy	0	Write enable	0	R	
		D0	RTCHLD	Counter hold control	1	Counter hold	0	Running	0	R/W	

D[7:2] Reserved

D1 RTCBSY: Counter Busy Flag Bit

This flag indicates whether 1 is being carried over to the next-digit counter.

- 1 (R): Busy (while carry is taking place)
 0 (R): Accessible for the real-time clock counter programming

Attempting a write or stop operation may corrupt the counter values if 1 is being carried over. Therefore, this bit should be checked to confirm that the counters are not in a carry (busy) state before writing data to the counter registers.

This bit set to 1 by the following sources.

Generating sources: Every second, RTCHLD +1-second correction and 30-second correction

Generating time: During 1/256-second

D0 RTCHLD: Counter Hold Control Bit

This bit allows the real-time clock counters held intact.

1 (R/W): Disable carry over of real-time clock counter

0 (R/W): Normal operation (software reset value)

If 1 is written to the RTCHLD register, the 1-second counter is disabled to carry over. Data can be read without considering the counter status change. Also, if a 1-second carry out timing occurs when 1 is written to the RTCHLD register, the time is corrected by adding 1 second (counting up) when 0 is written to the RTCHLD register.

- Notes:**
- If RTCBSY=1, the RTCHLD register cannot be set to 1 (it is fixed to 0).
 - If RTCHLD=1 and if the second or subsequent 1-second carry over timing occurs, the time is corrected by adding 1 second only when the RTCHLD register is set to 0.

RTC Second Register (RTC_SEC)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RTC Second Register (RTC_SEC)	0x5144 (8 bits)	D7	–	reserved	–	0	R	0 when being read.
		D6–4	RTCSH	10 second counter	0 to 5	0	R/W	
		D3–0	RTCSL	1 second counter	0 to 9	0	R/W	

D7 Reserved

D[6:4] RTCSH[2:0]: RTC 10-second Counter Bits

These bits comprise a 3-bit BCD counter used to count tens of seconds.

The counter counts from 0 to 5 with a carry over of 1 from the 1-second counter. This counter is reset to 0 after 5 and outputs a carry over of 1 to the 1-minute counter.

D[3:0] RTCSL[3:0]: RTC 1-second Counter Bits

These bits comprise a 4-bit BCD counter used to count units of seconds.

The counter counts from 0 to 9 synchronously with a 1-second signal derived from the 32.768-kHz OSC1 clock. This counter is reset to 0 after 9 and outputs a carry over of 1 to the 10-second counter.

RTC Minute Register (RTC_MIN)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RTC Minute Register (RTC_MIN)	0x5145 (8 bits)	D7	–	reserved	–	–	–	0 when being read.
		D6–4	RTCMIH	10 minute counter	0 to 5	0	R/W	
		D3–0	RTCMIL	1 minute counter	0 to 9	0	R/W	

D7 Reserved

D[6:4] RTCMIH[2:0]: RTC 10-minute Counter Bits

These bits comprise a 3-bit BCD counter used to count tens of minutes.

The counter counts from 0 to 5 with a carry over of 1 from the 1-minute counter. This counter is reset to 0 after 5 and outputs a carry over of 1 to the 1-hour counter.

D[3:0] RTCMIL[3:0]: RTC 1-minute Counter Bits

These bits comprise a 4-bit BCD counter used to count units of minutes.

The counter counts from 0 to 9 with a carry over of 1 from the 10-second counter. This counter is reset to 0 after 9 and outputs a carry over of 1 to the 10-minute counter.

RTC Hour Register (RTC_HOUR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RTC Hour Register (RTC_HOUR)	0x5146 (8 bits)	D7	--	reserved	--	0	R	0 when being read.
		D6	RTCAP	AM/PM indicator	1 PM 0 AM	0	R/W	
		D5-4	RTCHH	10 hour counter	0 to 2	1	R/W	
		D3-0	RTCHL	1 hour counter	0 to 9	2	R/W	

D7 Reserved

D6 **RTCAP: AM/PM Indicator Bit**

When 12-hour mode is selected, this bit indicates A.M. or P.M.

1 (R/W): P.M.

0 (R/W): A.M.

This bit is only effective when RTC24H/RTC_CNTL0 register is set to 0 (12-hour mode).

When 24-hour mode is selected, this bit is fixed to 0 and writing 1 is ignored.

Note: The RTCAP bit keeps the current set value even if RTC24H/RTC_CNTL0 register is changed from 12-hour mode to 24-hour mode, and will be fixed at 0 after the hour counter is updated (or reset in software).

D[5:4] **RTCHH[1:0]: RTC 10-hour Counter Bits**

These bits comprise a 2-bit BCD counter used to count tens of hours.

With a carry over of 1 from the 1-hour counter, the counter counts from 0 to 1 when 12-hour mode is selected, or from 0 to 2 when 24-hour mode is selected. The counter is reset at 12 o'clock or 24 o'clock, and outputs a carry over of 1 to the 1-day counter.

D[3:0] **RTCHL[3:0]: RTC 1-hour Counter Bits**

These bits comprise a 4-bit BCD counter used to count units of hours.

The counter counts from 0 to 9 with a carry over of 1 from the 10-minute counter. This counter is reset to 0 after 9 and outputs a carry over of 1 to the 10-hour counter. Depending on whether 12-hour mode or 24-hour mode is selected, the counter is reset at 12 o'clock or 24 o'clock.

RTC Day Register (RTC_DAY)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RTC Day Register (RTC_DAY)	0x5147 (8 bits)	D7-6	--	reserved	--	0	R	0 when being read.
		D5-4	RTCDH	10 day counter	0 to 3	0	R/W	
		D3-0	RTCDL	1 day counter	0 to 9	1	R/W	

Notes:

- Data should not be read from or written to the counters while 1 is being carried over. (See Section 13.3.5, "Counter Hold and Busy Flag," and Section 13.3.7, "Counter Read.")

- Rewriting RTC24H/RTC_CNTL0 register may corrupt the count data in this register. Therefore, after changing the RTC24H setting, be sure to set up this register again.

D[7:6] Reserved

D[5:4] **RTCDH[1:0]: RTC 10-day Counter Bits**

These bits comprise a 2-bit BCD counter used to count tens of days. The counter counts from 0 to 2 or 3 with a carry over of 1 from the 1-day counter. The number of days in each month and leap years are taken into account, so that when months change the counter is reset to 0 along with the 1-day counter, and a carry over of 1 is output to the 1-month counter.

D[3:0] **RTCDL[3:0]: RTC 1-day Counter Bits**

These bits comprise a 4-bit BCD counter used to count units of days.

The counter counts from 0 to 9 with a carry over of 1 from the hour counter. This counter is reset to 0 after 9 and outputs a carry over of 1 to the 10-day counter. The number of days in each month and leap years are taken into account, so that the counter is reset to 1 when months change.

RTC Month Register (RTC_MONTH)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RTC Month Register (RTC_MONTH)	0x5148 (8 bits)	D7-5	–	reserved	–	0	R	0 when being read.
		D4	RTCMOH	10 month counter	0 to 1	0	R/W	
		D3-0	RTCMOL	1 month counter	0 to 9	1	R/W	

- Notes:**
- Data should not be read from or written to the counters while 1 is being carried over. (See Section 13.3.5, “Counter Hold and Busy Flag,” and Section 13.3.7, “Counter Read.”)
 - Rewriting RTC24H/RTC_CNTL0 register may corrupt the count data in this register. Therefore, after changing the RTC24H setting, be sure to set up this register again.

D[7:5] Reserved

D4 RTCMOH: RTC 10-month Counter Bit

This is a tens of months count bit.

This bit is set to 1 with a carry over of 1 from the 1-month counter. When years change, this bit is reset to 0 along with the 1-month counter, and a carry over of 1 is output to the 1-year counter.

D[3:0] RTCMOL[3:0]: RTC 1-month Counter Bits

These bits comprise a 4-bit BCD counter used to count units of months.

The counter counts from 0 to 9 with a carry over of 1 from the day counter. This counter is reset to 0 after 9 and outputs a carry over of 1 to the 10-month counter. The counter is reset to 1 when years change.

RTC Year Register (RTC_YEAR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RTC Year Register (RTC_YEAR)	0x5149 (8 bits)	D7-4	RTCYH	10 year counter	0 to 9	0	R/W	
		D3-0	RTCYL	1 year counter	0 to 9	0	R/W	

- Notes:**
- Data should not be read from or written to the counters while 1 is being carried over. (See Section 13.3.5, “Counter Hold and Busy Flag,” and Section 13.3.7, “Counter Read.”)
 - Rewriting RTC24H/RTC_CNTL0 register may corrupt the count data in this register. Therefore, after changing the RTC24H setting, be sure to set up this register again.

D[7:4] RTCYH[3:0]: RTC 10-year Counter Bits

These bits comprise a 4-bit BCD counter used to count tens of years. The counter counts from 0 to 9 with a carry over of 1 from the 1-year counter.

D[3:0] RTCYL[3:0]: RTC 1-year Counter Bits

These bits comprise a 4-bit BCD counter used to count units of years.

The counter counts from 0 to 9 with a carry over of 1 from the month counter. This counter is reset to 0 after 9 and outputs a carry over of 1 to the 10-year counter.

RTC Week Register (RTC_WEEK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
RTC Week Register (RTC_WEEK)	0x514a (8 bits)	D7-3	–	reserved	–	0	R	0 when being read.	
		D2-0	RTCWK	day of week counter	RTCWK Day of week	000	R/W		
						111	N/A		
						110	Saturday		
						101	Friday		
						100	Thursday		
						011	Wednesday		
						010	Tuesday		
						001	Monday		
						000	Sunday		

- Notes:**
- Data should not be read from or written to the counters while 1 is being carried over. (See Section 13.3.5, “Counter Hold and Busy Flag,” and Section 13.3.7, “Counter Read.”)
 - Rewriting RTC24H/RTC_CNTL0 register may corrupt the count data in this register. Therefore, after changing the RTC24H setting, be sure to set up this register again.

D[7:3] Reserved

D[2:0] RTCWK[2:0]: RTC Days of Week Counter Bits

This is a septenary counter (that counts from 0 to 6) representing days of the week. This counter counts at the same timing as the 1-day counter.

The correspondence between the counter values and days of the week can be set in a program as desired. Table 13.5.2 lists the basic correspondence.

Table 13.5.2 Correspondence between Counter Values and Days of the Week

RTCWK[2:0]	Days of the week
0x6	Saturday
0x5	Friday
0x4	Thursday
0x3	Wednesday
0x2	Tuesday
0x1	Monday
0x0	Sunday

(Default: indeterminate)

RTC 1Hz Register (RTC_1HZ)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RTC 1Hz Register (RTC_1HZ)	0x514b (8 bits)	D7	RTC1HZ	1/sec counter	0x00 to 0xff	0	R	
		D6	RTC2HZ					
		D5	RTC4HZ					
		D4	RTC8HZ					
		D3	RTC16HZ					
		D2	RTC32HZ					
		D1	RTC64HZ					
		D0	RTC128HZ					

The 1-second or less counter data can be read out. (Default: 0x0)

This register is read-only and cannot be written to.

The bits correspond to various frequencies, as follows:

- D7: 1 Hz
- D6: 2 Hz
- D5: 4 Hz
- D4: 8 Hz
- D3: 16 Hz
- D2: 32 Hz
- D1: 64 Hz
- D0: 128 Hz

Note: The correct counter value may not be read out (reading is unstable) if the register is read while counting is underway. Read the counter register twice in succession and treat the value as valid if the values read are identical.

14 Watchdog Timer (WDT)

14.1 WDT Module Overview

The S1C17706 includes a watchdog timer module (WDT) that uses the OSC1 oscillator as its clock source. This timer is used to detect CPU runaway.

The features of WDT are listed below.

- 10-bit up counter
- Either reset or NMI can be generated if the counter overflows.

Figure 14.1.1 shows the WDT configuration.

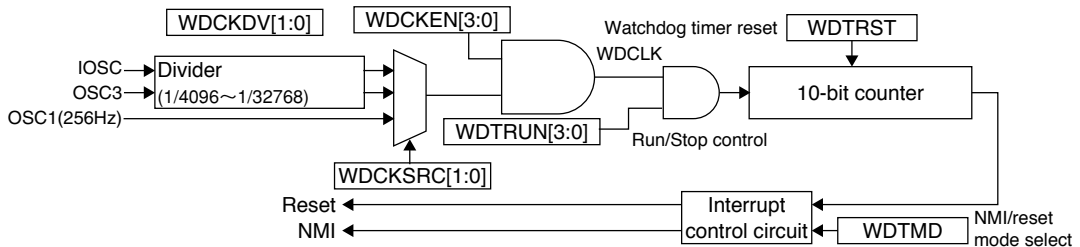


Figure 14.1.1 WDT Configuration

The WDT module generates an NMI or reset (selectable via software) to the CPU if not reset within $131,072/\text{WDCLK}$ seconds (4 seconds when $\text{WDCLK} = 32.768$ kHz).

Reset WDT via software within this cycle to prevent NMI/resets, which in turn enables runaway detection for programs that do not pass through the handler routine.

14.2 WDT Clock

Clock source selection

The clock source can be selected from IOSC, OSC3, OSC1, or external clock using $\text{WDCKSRC}[1:0]/\text{WDT_CLK}$ register. This can not be modified if $\text{WDCKEN}[3:0]/\text{WDT_CLK}$ is not disable. The clock source been selected by WDCLK cannot be disabled.

Table 14.2.1 Clock Source Selection

WDCKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default : 0x1)

Clock division ratio selection

When the clock source is OSC1

No division ratio needs to be selected when OSC1 is selected for the clock source. The $1/128$ division of the OSC1 clock is directly used as WDCLK .

When the clock source is IOSC or OSC3

When IOSC or OSC3 is selected for the clock source, use $\text{WDCKDV}[1:0]/\text{WDT_CLK}$ register to select the division ratio. Set WDCLK to become around 32 kHz. This setting can not be modified if $\text{WDCKEN}[3:0]/\text{WDT_CLK}$ is not disable.

Table 14.2.2 IOSC/OSC3 Division Ratio Selection

WDCKDV[1:0]	Division ratio
0x3	1/32768
0x2	1/16384
0x1	1/8192
0x0	1/4096

(Default : 0x0)

Clock enable

The clock supply to WDCLK is controlled using the WDCKEN[3:0]/WDT_CLK register. The WDCKEN[3:0] default setting is 0b1010, which disables the clock supply. Setting WDCKEN[3:0] to other than 0b1010 sends the clock generated as above to WDT. If WDT is not required, disable the clock supply to reduce current consumption. If WDCLK is not supplied, the WDT counter cannot operate. However, the WDT registers can be accessed even if WDCLK is stopped.

14.3 WDT Control

14.3.1 NMI/Reset Mode Selection

WDTMD/WDT_ST register is used to select whether an NMI signal or a reset signal is output when WDT has not been reset within the NMI/reset generation cycle.

To generate an NMI, set WDTMD to 0 (default). Set to 1 to generate a reset.

14.3.2 WDT Run/Stop Control

WDT starts counting when a value other than 0b1010 is written to WDTRUN[3:0]/WDT_CTL register and stops when 0b1010 is written.

At initial reset, WDTRUN[3:0] is set to 0b1010 to stop the watchdog timer.

Since an NMI or reset may be generated immediately after running depending on the counter value, WDT should also be reset concurrently (before running the watchdog timer), as explained in the following section.

14.3.3 WDT Reset

To reset WDT, write 1 to WDTRST/WDT_CTL register.

A location should be provided for periodically processing the routine for resetting WDT before an NMI or reset is generated when using WDT. Process this routine within $131,072/fosc1$ second (4 seconds when $fosc1 = 32.768$ kHz) cycle.

After resetting, WDT starts counting with a new NMI/Reset generation cycle.

If WDT is not reset within the NMI/Reset generation cycle for any reason, the CPU is switched to interrupt processing by NMI or reset, the interrupt vector is read out, and the interrupt handler routine is executed. The reset and NMI vector addresses are $TTBR + 0x0$ and $TTBR + 0x08$.

If the counter overflows and generates an NMI without WDT being reset, WDTST/WDT_ST register is set to 1. This bit is provided to confirm that WDT was the source of the NMI. The WDTST set to 1 is cleared to 0 by resetting WDT.

14.3.4 Operations in HALT and SLEEP Modes

HALT mode

The WDT module operates in HALT mode, as the clock is supplied. HALT mode is therefore cleared by an NMI or reset if it continues for more than the NMI/reset generation cycle. To disable WDT while in HALT mode, stop WDT by writing 0b1010 to WDTRUN[3:0]/WDT_CTL register before executing the `halt` instruction. Reset WDT before resuming operations after HALT mode is cleared.

SLEEP mode

The WDT module operates in SLEEP mode too, as the clock is on. However, an NMI or reset will not be generated until the SLEEP mode has cleared. If the clock source is off, to prevent generation of an unnecessary NMI or reset after clearing SLEEP mode, reset WDT before executing the `s1p` instruction. WDT should also be stopped as required using `WDTRUN[3:0]`.

14.4 Control Register Details

Table 14.4.1 List of WDT Registers

Address	Register name		Function
0x5040	WDT_CTL	Watchdog Timer Control Register	Resets and starts/stops the timer.
0x5041	WDT_ST	Watchdog Timer Status Register	Sets the timer mode and indicates NMI status.
0x5070	WDT_CLK	Watchdog Timer Clock Select Register	Selects a timer clock.

The WDT registers are described in detail below. These are 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

Watchdog Timer Control Register (WDT_CTL)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks	
Watchdog Timer Control Register (WDT_CTL)	0x5040 (8 bits)	D7–5	–	reserved	–		–	–	0 when being read.	
		D4	WDTRST	Watchdog timer reset	1	Reset	0	Ignored	0	R/W
		D3–0	WDTRUN[3:0]	Watchdog timer run/stop control	Other than 1010 Run	1010 Stop	1010	R/W		

D[7:5] Reserved

D4 WDTRST: Watchdog Timer Reset Bit

Resets WDT.

1 (W): Reset

0 (W): Ignored

0 (R): Always 0 when read (default)

Note: To use WDT, it must be reset by writing 1 to this bit within the NMI/reset generation cycle (4 seconds when $f_{OSC1} = 32.768$ kHz). This resets the up-counter to 0 and starts counting with a new NMI/reset generation cycle.

D[3:0] WDTRUN[3:0]: Watchdog Timer Run/Stop Control Bits

Controls WDT Run/Stop.

Values other than 0b1010 (R/W): Run

0b1010 (R/W): Stop (default)

Note: WDT must also be reset to prevent generation of an unnecessary NMI or Reset before starting WDT.

Watchdog Timer Status Register (WDT_ST)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks	
Watchdog Timer Status Register (WDT_ST)	0x5041 (8 bits)	D7–2	–	reserved	–		–	–	0 when being read.	
		D1	WDTMD	NMI/Reset mode select	1	Reset	0	NMI	0	R/W
		D0	WDST	NMI status	1	NMI occurred	0	Not occurred	0	R

D[7:2] Reserved

D1 WDTMD: NMI/Reset Mode Select Bit

Selects NMI or reset generation on counter overflow.

1 (R/W): Reset

0 (R/W): NMI (default)

Setting this bit to 1 outputs a reset signal when the counter overflows. Setting to 0 outputs an NMI signal.

D0 WDTST: NMI Status Bit

Indicates a counter overflow and NMI occurrence.

1 (R): NMI occurred (counter overflow)

0 (R): NMI not occurred (default)

This bit confirms that WDT was the source of the NMI. The WDTST set to 1 is cleared to 0 by resetting WDT.

This is also set by a counter overflow if reset output is selected, but is cleared by initial reset and cannot be confirmed.

Watchdog Timer Clock Select Register (WDT_CLK)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks
WDT Clock Select Register (WDT_CLK)	0x5070 (8 bits)	D7-6	WDCKDV [1:0]	WDT clock division ratio select	WDCKDV[1:0]	Division ratio	0x0	R/W	When the clock source is IOSC or OSC3
					0x3	1/32768			
					0x2	1/16384			
					0x1	1/8192			
					0x0	1/4096			
		D5-4	WDCKSRC [1:0]	WDT clock source select	WDCKSRC[1:0]	Clock source	0x1	R/W	
					0x3	reserved			
					0x2	OSC3			
					0x1	OSC1			
		D3-0	WDCKEN [3:0]	WDT clock enable	other	Enable	0b1010	Disable	

D[7:6] WDCKDV[1:0]: WDT Clock Division Ratio Select Bits

Selects the division ratio when IOSC or OSC3 is selected as the WDT clock source. This can not be modified if WDCKEN[3:0]/WDT_CLK is not disable.

Table 14.4.2 IOSC/OSC3 Division Ratio Selection

WDCKDV[1:0]	Division ratio
0x3	1/32768
0x2	1/16384
0x1	1/8192
0x0	1/4096

(Default : 0x0)

No division ratio needs to be selected when OSC1 is selected for the clock source.

D[5:4] WDCKSRC[1:0]: WDT Clock Source Select Bits

Selects the WDT clock source. This can not be modified if WDCKEN[3:0]/WDT_CLK is not disable. The oscillator been selected by WDT clock source cannot be disabled.

Table 14.4.3 Clock Source Selection

WDCKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default : 0x1)

D[3:0] WDCKEN[3:0]: WDT Clock Enable Bits

Enables or disables the WDT clock supply to WDT.

Except 0b1010 (R/W): Enabled (on)

0b1010 (R/W): Disabled (off) (default)

The WDCKEN[3:0] default setting is 0b1010, which stops the clock supply. Setting WDCKEN[3:0] to 0b1010 feeds the clock selected as above to WDT. If no WDT display is required, stop the clock to reduce current consumption.

15 UART

15.1 UART Module Overview

The S1C17706 includes a UART module for asynchronous communication. It includes a 2-byte receive data buffer and 1-byte transmit data buffer allowing successive data transfer. The UART module also includes an RZI modulator/demodulator circuit that enables IrDA 1.0-compatible infrared communications simply by adding basic external circuits.

The following shows the main features of the UART:

- Number of channels: 2 channels
- Transfer rate: 150 to 460,800 bps (150 to 115,200 bps in IrDA mode)
- Transfer clock: Internal clock (baud rate generator output) or an external clock (SCLK input) can be selected.
- Character length: 7 or 8 bits (LSB first)
- Parity mode: Even, odd, or no parity
- Stop bit: 1 or 2 bits
- Start bit: 1 bit fixed
- Supports full-duplex communications.
- Includes a 2-byte receive data buffer and a 1-byte transmit data buffer.
- Includes a baud rate generator with fine adjustment function.
- Includes an RZI modulator/demodulator circuit to support IrDA 1.0-compatible infrared communications.
- Can detect parity error, framing error, and overrun error during receiving.
- Can generate receive buffer full, transmit buffer empty, end of transmission and receive error interrupts.

Figure 15.1.1 shows the UART configuration.

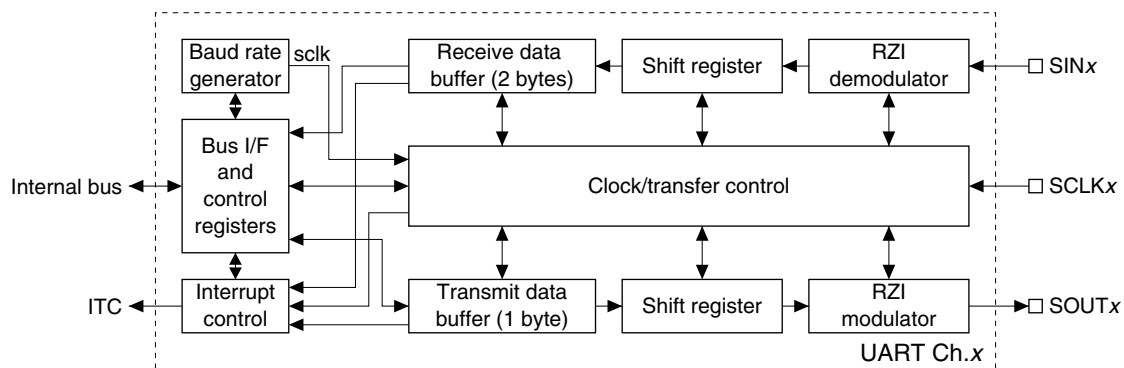


Figure 15.1.1 UART Configuration

Note: The letter 'x' in register and pin names refers to a channel number (0 or 1).

Example: UART_CTLx register

Ch.0: UART_CTL0 register

Ch.1: UART_CTL1 register

15.2 UART Input/Output Pins

Table 15.2.1 lists the UART input/output pins.

Table 15.2.1 List of UART Pins

Pin name	I/O	Qty	Function
SINO (Ch.0)	I	1	UART data input pin Inputs serial data sent from an external serial device.
SOUT0 (Ch.0)	O	1	UART data output pin Outputs serial data sent to an external serial device.
SCLK0 (Ch.0)	I	1	UART clock input pin Inputs the transfer clock when an external clock is used.

The UART input/output pins (SIN_x, SOUT_x, SCLK_x) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as UART input/output pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

15.3 Baud Rate Generator

The UART module includes a baud rate generator to generate the transfer (sampling) clock. It consists of an 8-bit programmable timer with fine mode. The timer counts down from the initial value set via software and outputs an underflow signal when the counter underflows. The underflow signal is used to generate the transfer clock. The underflow cycle can be programmed by selecting the clock source and initial data, enabling the application program to obtain serial transfer rates as required. Fine mode provides a function that minimizes transfer rate errors.

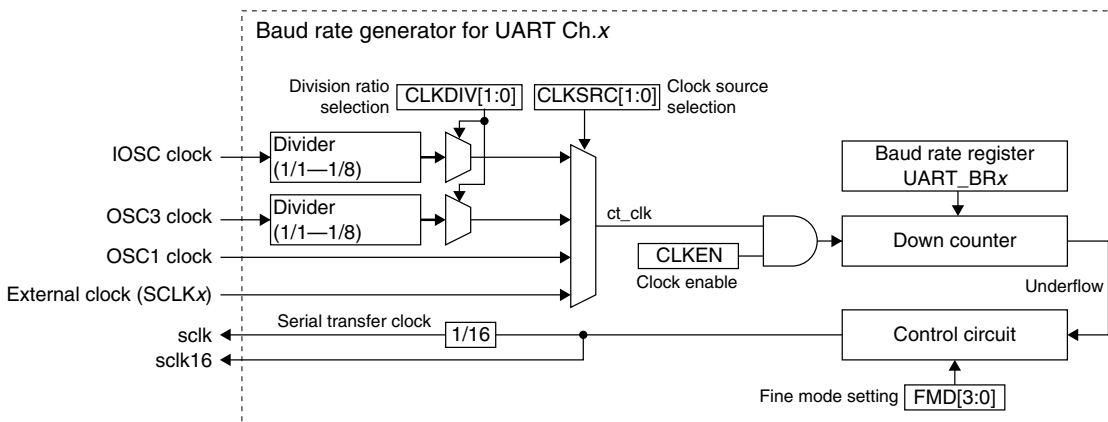


Figure 15.3.1 Baud Rate Generator

Clock source settings

The clock source can be selected from IOSC, OSC3, OSC1, or external clock using CLKSRC[1:0]/UART_CLK_x register.

Table 15.3.1 Clock Source Selection

CLKSRC[1:0]	Clock source
0x3	External clock (SCLK _x)
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

Note: When inputting the external clock via the SCLK_x pin, the clock duty ratio must be 50%.

When IOSC or OSC3 is selected as the clock source, use CLKDIV[1:0]/UART_CLK_x register to select the division ratio.

Table 15.3.2 IOSC/OSC3 Division Ratio Selection

CLKDIV[1:0]	Division ratio
0x3	1/8
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

Clock supply to the counter is controlled using CLKEN/UART_CLK x register. The CLKEN default setting is 0, which disables the clock supply. Setting CLKEN to 1 sends the clock selected to the counter.

Initial counter value setting

BR[7:0]/UART_BR x register is used to set the initial value for the down counter.

The initial counter value is preset to the down counter if the counter underflows. This means that the initial counter value and the count clock frequency determine the time elapsed between underflows.




Figure 15.3.2 Counter Underflow and Clock Generated

Use the following equations to calculate the initial counter value for obtaining the desired transfer rate.

$$\text{bps} = \frac{\text{ct_clk}}{\{(\text{BR} + 1) \times 16 + \text{FMD}\}}$$

$$\text{BR} = \left(\frac{\text{ct_clk}}{\text{bps}} - \text{FMD} - 16 \right) \div 16$$

ct_clk: Count clock frequency (Hz)

BR: BR[7:0] setting (0 to 255)

bps: Transfer rate (bit/s)

FMD: FMD[3:0] (fine mode) setting (0 to 15)

Note: The UART transfer rate is capped at 460,800 bps (115,200 bps in IrDA mode). Do not set faster transfer rates.

Fine Mode

Fine mode provides a function that minimizes transfer rate errors. The baud rate generator output clock can be set to the required frequency by selecting the appropriate clock source and initial counter data. Note that errors may occur, depending on the transfer rate. Fine mode extends the output clock cycle by delaying the underflow pulse from the counter. This delay can be specified with the FMD[3:0]/UART_FMD x register. FMD[3:0] specifies the delay pattern to be inserted into a 16 underflow period. Inserting one delay extends the output clock cycle by one count clock cycle.

Table 15.3.3 Delay Patterns Specified by FMD[3:0]

FMD[3:0]	Underflow number															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
0x0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0x1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	D
0x2	-	-	-	-	-	-	-	D	-	-	-	-	-	-	-	D
0x3	-	-	-	-	-	-	-	D	-	-	-	D	-	-	-	D
0x4	-	-	-	D	-	-	-	D	-	-	-	D	-	-	-	D
0x5	-	-	-	D	-	-	-	D	-	-	-	D	-	D	-	D
0x6	-	-	-	D	-	D	-	D	-	-	-	D	-	D	-	D
0x7	-	-	-	D	-	D	-	D	-	D	-	D	-	D	-	D
0x8	-	D	-	D	-	D	-	D	-	D	-	D	-	D	-	D
0x9	-	D	-	D	-	D	-	D	-	D	-	D	-	D	D	D
0xa	-	D	-	D	-	D	D	D	-	D	-	D	-	D	D	D
0xb	-	D	-	D	-	D	D	D	-	D	D	D	-	D	D	D
0xc	-	D	D	D	-	D	D	D	-	D	D	D	-	D	D	D
0xd	-	D	D	D	-	D	D	D	-	D	D	D	D	D	D	D
0xe	-	D	D	D	D	D	D	D	-	D	D	D	D	D	D	D
0xf	-	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D

D: Indicates the insertion of a delay cycle.

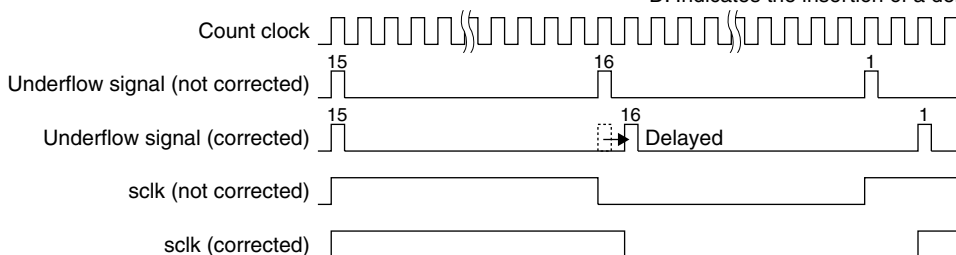


Figure 15.3.3 Delay Cycle Insertion in Fine Mode

At initial reset, FMD[3:0] is set to 0x0, preventing insertion of delay cycles.

Note: Make sure the UART is halted (RXEN/UART_CTLx register = 0) before setting the baud rate generator.

15.4 Transfer Data Settings

Set the following conditions to configure the transfer data format.

- Data length: 7 or 8 bits
- Start bit: Fixed at 1 bit
- Stop bit: 1 or 2 bits
- Parity bit: Even, odd, or no parity

Note: Make sure the UART is halted (RXEN/UART_CTLx register = 0) before changing transfer data format settings.

Data length

The data length is selected by CHLN/UART_MODx register. Setting CHLN to 0 (default) configures the data length to 7 bits. Setting CHLN to 1 configures it to 8 bits.

Stop bit

The stop bit length is selected by STPB/UART_MODx register. Setting STPB to 0 (default) configures the stop bit length to 1 bit. Setting STPB to 1 configures it to 2 bits.

Parity bit

Whether the parity function is enabled or disabled is selected by PREN/UART_MOD x register. Setting PREN to 0 (default) disables the parity function. In this case, no parity bit is added to the transfer data and the data is not checked for parity when received. Setting PREN to 1 enables the parity function. In this case, a parity bit is added to the transfer data and the data is checked for parity when received. When the parity function is enabled, the parity mode is selected by PMD/UART_MOD x register. Setting PMD to 0 (default) adds a parity bit and checks for even parity. Setting PMD to 1 adds a parity bit and checks for odd parity.

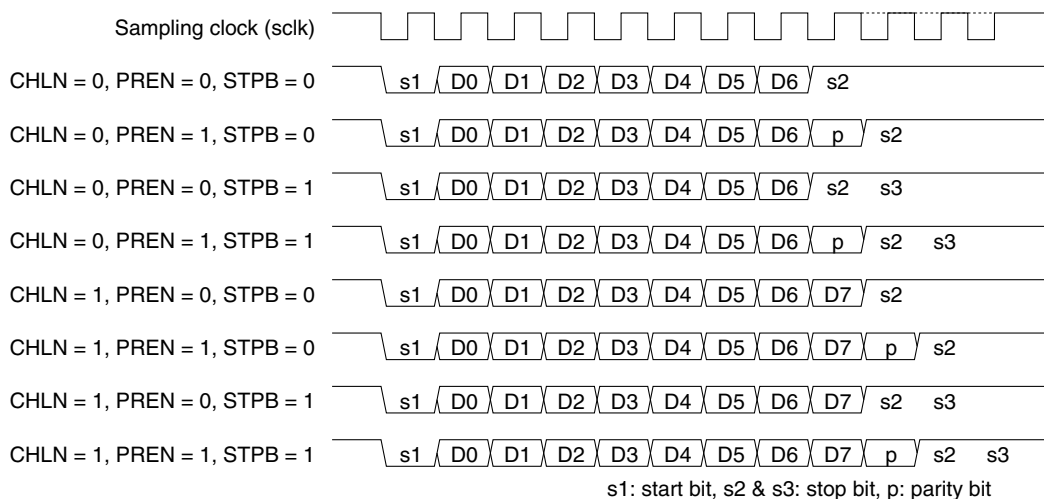


Figure 15.4.1 Transfer Data Format

15.5 Data Transfer Control

Make the following settings before starting data transfers.

- (1) Select the input clock. (See Section 15.3.)
- (2) Program the baud rate generator to output the transfer clock. (See Section 15.3.)
- (3) Set the transfer data format. (See Section 15.4.)
- (4) To use the IrDA interface, set IrDA mode. (See Section 15.8.)
- (5) Set interrupt conditions to use UART interrupts. (See Section 15.7.)

Note: Make sure the UART is halted (RXEN/UART_CTL x register = 0) before changing the above settings.

Enabling data transfers

Set RXEN/UART_CTL x register to 1 to enable data transfers. This puts the transmitter/receiver circuit in ready-to-transmit/receive status.

Note: Do not set RXEN to 0 while the UART is sending or receiving data.

Data transmission control

To start data transmission, write the transmit data to TXD[7:0]/UART_TXD x register.

The data is written to the transmit data buffer, and the transmitter circuit starts sending data.

The buffer data is sent to the transmit shift register, and the start bit is output from the SOUT x pin. The data in the shift register is then output from the LSB. The transfer data bit is shifted in sync with the sampling clock rising edge and output in sequence via the SOUT x pin. Following output of MSB, the parity bit (if parity is enabled) and the stop bit are output.


The transmitter circuit includes three status flags: TDBE/UART_ST x register, TRBS/UART_ST x register, and TRED/UART_ST x register.

The TDBE flag indicates the transmit data buffer status. This flag switches to 0 when the application program writes data to the transmit data buffer and reverts to 1 when the buffer data is sent to the transmit shift register.

An interrupt can be generated when this flag is set to 1 (see Section 15.7). Subsequent data is sent after confirming that the transmit data buffer is empty either by using this interrupt or by reading the TDBE flag. The transmit data buffer size is 1 byte, but a shift register is provided separately to allow data to be written while the previous data is being sent. Always confirm that the transmit data buffer is empty before writing transmit data. Writing data while the TDBE flag is 0 will overwrite earlier transmit data inside the transmit data buffer.

The TRBS flag indicates the shift register status. This flag switches to 1 when transmit data is loaded from the transmit data buffer to the shift register and reverts to 0 once the data is sent. Read this flag to check whether the transmitter circuit is operating or at standby.

The TRED switches to 1 when the TRBS flag reverts to 0 from 1, indicating that transmit operation has completed. An interrupt can be generated when this flag is set to 1. Use this interrupt for transmission end processing. The TRED flag is reset to 0 by writing 1.

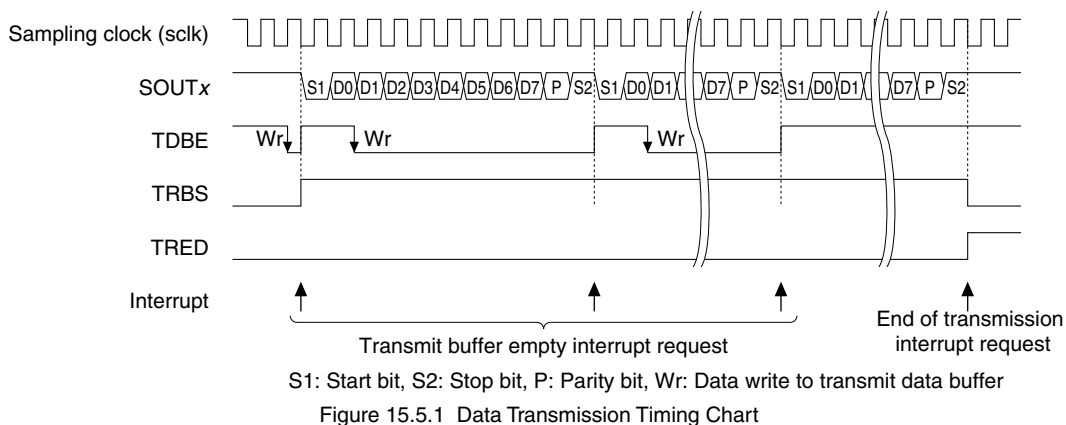

Data reception control

The receiver circuit is activated by setting RXEN to 1, enabling data to be received from an external serial device.

When the external serial device sends a start bit, the receiver circuit detects its Low level and starts sampling the following data bits. The data bits are sampled at the sampling clock rising edge, and the lead bit is loaded into the receive shift register as LSB. Once the MSB has been received into the shift register, the received data is loaded into the receive data buffer. If parity checking is enabled, the receiver circuit checks the received data at the same time by checking the parity bit received immediately after the MSB.

The receive data buffer, a 2-byte FIFO, receives data until full.

Received data in the buffer can be read from RXD[7:0]/UART_RXD_x register. The oldest data is read out first and data is cleared by reading.

The receiver circuit includes two buffer status flags: RDRY/UART_ST_x register and RD2B/UART_ST_x register.

The RDRY flag indicates that the receive data buffer still contains data. The RD2B flag indicates that the receive data buffer is full.

- (1) RDRY = 0, RD2B = 0

The receive data buffer contents need not be read, since no data has been received.

- (2) RDRY = 1, RD2B = 0

One 8-bit data has been received. Read the receive data buffer contents once. This resets the RDRY flag. The buffer reverts to state (1) above.

If the receive data buffer contents are read twice, the second data read will be invalid.

- (3) RDRY = 1, RD2B = 1

Two 8-bit data have been received. Read the receive data buffer contents twice. The receive data buffer outputs the oldest data first. This resetting the RD2B flag. The buffer then reverts to the state in (2) above. The second read outputs the most recent received data, after which the buffer reverts to the state in (1) above.


When the receive data buffer is full and one more 8-bit data is received, an overrun error will occur and the

new data will overwrite the shift register data. The contents of the receive data buffer must be read out before an overrun error occurs. For detailed information on overrun errors, refer to Section 15.6.

The volume of data received can be checked by reading these flags.

The UART allows receive buffer full interrupts to be generated once data has been received in the receive data buffer. These interrupts can be used to read the receive data buffer. By default, a receive buffer full interrupt occurs when the receive data buffer receives one 8-bit data (status (2) above). This can be changed by setting RBFU/UART_CTLx register to 1 so that an interrupt occurs when the receive data buffer receives two 8-bit data.

Three error flags are also provided in addition to the flags previously mentioned. See Section 15.6 for detailed information on flags and receive errors.

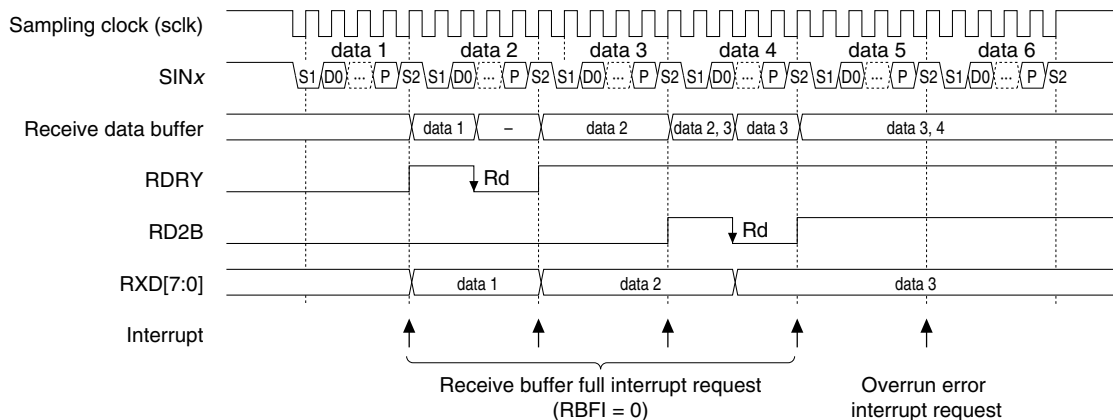

S1: Start bit, S2: Stop bit, P: Parity bit, Rd: Data read from RXD[7:0]

Figure 15.5.2 Data Receiving Timing Chart

Disabling data transfers

After a data transfer is completed (both transmission and reception), write 0 to RXEN to disable data transfers.

Note: Setting RXEN to 0 empties the transmit data buffer, clearing any remaining data. The data being transferred cannot be guaranteed if RXEN is set to 0 while data is being sent or received. Make sure that the TDBE flag is 1 and the TRBS and RDRY flags are both 0 before disabling data transfer.

15.6 Receive Errors

Three different receive errors may be detected while receiving data.

Since receive errors are interrupt causes, they can be processed by generating interrupts. For more information on UART interrupt control, see Section 15.7.

Parity error

If PREN/UART_MODx register has been set to 1 (parity enabled), data received is checked for parity.

Data received in the shift register is checked for parity when sent to the receive data buffer. The matching is checked against the PMD/UART_MODx register setting (odd or even parity). If the result is a non-match, a parity error is issued, and the parity error flag PER/UART_STx register is set to 1. Even if this error occurs, the data received is sent to the receive data buffer, and the receiving operation continues. However, the received data cannot be guaranteed if a parity error occurs. The PER flag is reset to 0 by writing 1.

Framing error

A framing error occurs if the stop bit is received as 0 and the UART determines loss of sync. If the stop bit is set to two bits, only the first bit is checked.

The framing error flag FER/UART_STx register is set to 1 if this error occurs. The received data is still transferred to the receive data buffer if this error occurs and the receiving operation continues, but the data cannot be guaranteed, even if no framing error occurs for subsequent data receiving. The FER flag is reset to 0 by writing 1.

Overrun error

Even if the receive data buffer is full (two 8-bit data already received), the third data can be received in the shift register. However, if the receive data buffer is not emptied (by reading out data received) by the time this data has been received, the third data received in the shift register will not be sent to the buffer and generate an overrun error. If an overrun error occurs, the overrun error flag OER/UART_STx register is set to 1. The receiving operation continues even if this error occurs. The OER flag is reset to 0 by writing 1.

15.7 UART Interrupts

The UART includes a function for generating the following four different types of interrupts.

- Transmit buffer empty interrupt
- End of transmission interrupt
- Receive buffer full interrupt
- Receive error interrupt

Each UART channel outputs one interrupt signal shared by the four above interrupt causes to the interrupt controller (ITC). Inspect the status flag and error flag to determine the interrupt cause occurred.

Transmit buffer empty interrupt

To use this interrupt, set TIEN/UART_CTLx register to 1. If TIEN is set to 1 while TDBE/UART_STx register is 1 (transmit data buffer empty) or if TDBE is set to 1 (when the transmit data buffer becomes empty by loading the transmit data written to it to the shift register) while TIEN is 1, an interrupt request is sent to the ITC. An interrupt occurs if other interrupt conditions are met.

If TIEN is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

You can inspect the TDBE flag in the UART interrupt handler routine to determine whether the UART interrupt is attributable to a transmit buffer empty. If TDBE is 1, the next transmit data can be written to the transmit data buffer by the interrupt handler routine.

Note: When using the UART transmit buffer empty interrupt, the same clock source as the system clock must be selected using the CLKSRC[1:0]/UART_CLKx register.

End of transmission interrupt

To use this interrupt, set TEIEN/UART_CTLx register to 1. If TEIEN is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When the TRBS flag is reset to 0, the UART sets TRED/UART_STx register to 1, indicating that the transmit

operation has completed. If end of transmission interrupts are enabled ($TEIEN = 1$), an interrupt request is sent simultaneously to the ITC.

An interrupt occurs if other interrupt conditions are met. You can inspect the TRED flag in the UART interrupt handler routine to determine whether the UART interrupt is attributable to an end of transmission. If TRED is 1, the transmission processing can be terminated.

Receive buffer full interrupt

To use this interrupt, set $RIEN/UART_CTLx$ register to 1. If $RIEN$ is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

If the specified volume of received data is loaded into the receive data buffer when a receive buffer full interrupt is enabled ($RIEN = 1$), the UART outputs an interrupt request to the ITC. If $RBF/UART_CTLx$ register is 0, an interrupt request is output as soon as one received data is loaded into the receive data buffer (when $RDRY/UART_STx$ register is set to 1). If RBF is 1, an interrupt request is output as soon as two received data are loaded into the receive data buffer (when $RD2B/UART_STx$ register is set to 1).

An interrupt occurs if other interrupt conditions are met. You can inspect the $RDRY$ and $RD2B$ flags in the UART interrupt handler routine to determine whether the UART interrupt is attributable to a receive buffer full. If $RDRY$ or $RD2B$ is 1, the received data can be read from the receive data buffer by the interrupt handler routine.

Receive error interrupt

To use this interrupt, set $REIEN/UART_CTLx$ register to 1. If $REIEN$ is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

The UART sets an error flag, PER , FER , or $OER/UART_STx$ register to 1 if a parity error, framing error, or overrun error is detected when receiving data. If receive error interrupts are enabled ($REIEN = 1$), an interrupt request is sent simultaneously to the ITC.

If other interrupt conditions are satisfied, an interrupt occurs. You can inspect the PER , FER , and OER flags in the UART interrupt handler routine to determine whether the UART interrupt was caused by a receive error. If any of the error flags has the value 1, the interrupt handler routine will proceed with error recovery.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

15.8 IrDA Interface

This UART module includes an RZI modulator/demodulator circuit enabling implementation of IrDA 1.0-compatible infrared communication function simply by adding basic external circuits.

The transmit data output from the UART transmit shift register is input to the modulator circuit and output from the $SOUTx$ pin after the Low pulse has been modulated to a $3 \times sclk16$ cycle.

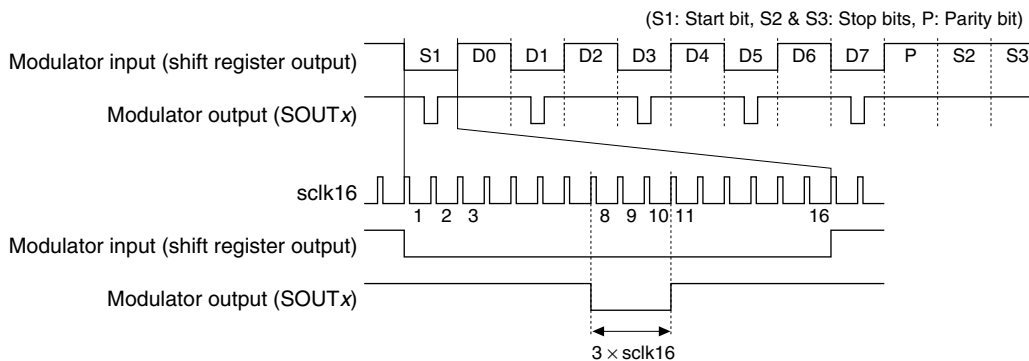


Figure 15.8.1 Transmission Signal Waveform

The received IrDA signal is input to the demodulator circuit and the Low pulse width is converted to $16 \times sclk16$ cycles before entry to the receive shift register. The demodulator circuit uses the pulse detection clock selected separately from the transfer clock to detect Low pulses input (when minimum pulse width = $1.41 \mu\text{s}/115,200 \text{ bps}$).

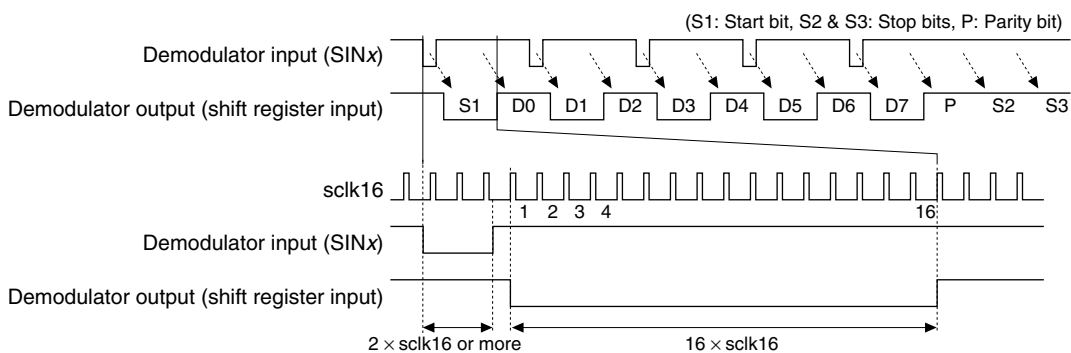


Figure 15.8.2 Receive Signal Waveform

IrDA enable

To use the IrDA interface function, set IRMD/UART_EXP x register to 1. This enables the RZI modulator/demodulator circuit.

Note: This setting must be performed before setting other UART conditions.

Serial data transfer control

Data transfer control in IrDA mode is identical to that for normal interfaces. For detailed information on data format settings and data transfer and interrupt control methods, refer to the preceding sections.

15.9 Control Register Details

Table 15.9.1 List of UART Registers

Address	Register name	Function
0x4100	UART_ST0	UART Ch.0 Status Register
0x4101	UART_TXD0	UART Ch.0 Transmit Data Register
0x4102	UART_RXD0	UART Ch.0 Receive Data Register
0x4103	UART_MOD0	UART Ch.0 Mode Register
0x4104	UART_CTL0	UART Ch.0 Control Register
0x4105	UART_EXP0	UART Ch.0 Expansion Register
0x4106	UART_BR0	UART Ch.0 Baud Rate Register
0x4107	UART_FMD0	UART Ch.0 Fine Mode Register
0x4120	UART_ST1	UART Ch.1 Status Register
0x4121	UART_TXD1	UART Ch.1 Transmit Data Register
0x4122	UART_RXD1	UART Ch.1 Receive Data Register
0x4123	UART_MOD1	UART Ch.1 Mode Register
0x4124	UART_CTL1	UART Ch.1 Control Register
0x4125	UART_EXP1	UART Ch.1 Expansion Register
0x4126	UART_BR1	UART Ch.1 Baud Rate Register
0x4127	UART_FMD1	UART Ch.1 Fine Mode Register
0x506c	UART_CLK0	UART Ch.0 Clock Control Register
0x506d	UART_CLK1	UART Ch.1 Clock Control Register

The UART registers are described in detail below. These are 8-bit registers.

Notes:

- When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

- The following UART bits should be set with transfers disabled (RXEN = 0).
 - All UART_MOD x register bits (STPB, PMD, PREN, CHLN)
 - RBF1 bit in the UART_CTL x register
 - All UART_EXP x register bits (IRMD)
 - All UART_BR x register bits (BR[7:0])
 - All UART_FMD x register bits (FMD[3:0])
 - All UART_CLK x register bits (CLKDIV[1:0], CLKSRC[1:0], CLKEN)

UART Ch.x Status Register (UART_STx)

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks	
UART Ch.x Status Register (UART_STx)	0x4100 0x4120 (8 bits)	D7	TRED	End of transmission flag	1	Completed	0	Not completed	0	R/W	Reset by writing 1.
		D6	FER	Framing error flag	1	Error	0	Normal	0	R/W	
		D5	PER	Parity error flag	1	Error	0	Normal	0	R/W	
		D4	OER	Overrun error flag	1	Error	0	Normal	0	R/W	
		D3	RD2B	Second byte receive flag	1	Ready	0	Empty	0	R	Shift register status
		D2	TRBS	Transmit busy flag	1	Busy	0	Idle	0	R	
		D1	RDRY	Receive data ready flag	1	Ready	0	Empty	0	R	
		D0	TDBE	Transmit data buffer empty flag	1	Empty	0	Not empty	1	R	

D7 **TRED: End of Transmission Flag Bit**

Indicates whether the transmit operation has completed or not.

- 1 (R): Completed
- 0 (R): Not completed (default)
- 1 (W): Reset to 0
- 0 (W): Ignored

TRED is set to 1 when the TRBS flag is reset to 0 (when transmission has completed).

TRED is reset by writing 1.

D6 **FER: Framing Error Flag Bit**

Indicates whether a framing error has occurred or not.

- 1 (R): Error occurred
- 0 (R): No error (default)
- 1 (W): Reset to 0
- 0 (W): Ignored

FER is set to 1 when a framing error occurs. Framing errors occur when data is received with the stop bit set to 0. FER is reset by writing 1.

D5 **PER: Parity Error Flag Bit**

Indicates whether a parity error has occurred or not.

- 1 (R): Error occurred
- 0 (R): No error (default)
- 1 (W): Reset to 0
- 0 (W): Ignored

PER is set to 1 when a parity error occurs. Parity checking is enabled only when PREN/ UART_MODx register is set to 1 and is performed when received data is transferred from the shift register to the receive data buffer. PER is reset by writing 1.

D4 **OER: Overrun Error Flag Bit**

Indicates whether an overrun error has occurred or not.

- 1 (R): Error occurred
- 0 (R): No error (default)
- 1 (W): Reset to 0
- 0 (W): Ignored

OER is set to 1 when an overrun error occurs. Overrun errors occur if the receive data buffer is full when data is received in the shift register. The receive data buffer is not overwritten even if this error occurs. The shift register is overwritten as soon as the error occurs.

OER is reset by writing 1.

D3 **RD2B: Second Byte Receive Flag Bit**

Indicates that the receive data buffer contains two received data.

- 1 (R): Second byte can be read
- 0 (R): Second byte not received (default)

RD2B is set to 1 when the second byte of data is loaded into the receive data buffer and is reset to 0 when the first data is read from the receive data buffer.

D2 TRBS: Transmit Busy Flag Bit

Indicates the transmit shift register status.

1 (R): Operating

0 (R): Standby (default)

TRBS is set to 1 when transmit data is loaded from the transmit data buffer into the shift register and is reset to 0 when the data transfer is completed. Inspect TRBS to determine whether the transmit circuit is operating or at standby.

D1 RDRY: Receive Data Ready Flag Bit

Indicates that the receive data buffer contains valid received data.

1 (R): Data can be read

0 (R): Buffer empty (default)

RDRY is set to 1 when received data is loaded into the receive data buffer and is reset to 0 when all data has been read from the receive data buffer.

D0 TDBE: Transmit Data Buffer Empty Flag Bit

Indicates the transmit data buffer status.

1 (R): Buffer empty (default)

0 (R): Data exists

TDBE is reset to 0 when transmit data is written to the transmit data buffer and is set to 1 when the data is transferred to the shift register.

UART Ch.x Transmit Data Register (UART_TXDx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
UART Ch.x Transmit Data Register (UART_TXDx)	0x4101 0x4121 (8 bits)	D7-0	TXD[7:0]	Transmit data TXD7(6) = MSB TXD0 = LSB	0x0 to 0xff (0x7f)	0x0	R/W	

D[7:0] TXD[7:0]: Transmit Data

Write transmit data to be set in the transmit data buffer. (Default: 0x0)

The UART starts transmitting when data is written to this register. Data written to TXD[7:0] is retained until sent to the transmit data buffer.

Transmitting data from within the transmit data buffer generates a cause of transmit buffer empty interrupt.

TXD7 (MSB) is invalid in 7-bit mode.

Serial converted data is output from the SOUTx pin beginning with the LSB, in which the bits set to 1 are output as High level and bits set to 0 as Low level signals.

This register can also be read.

UART Ch.x Receive Data Register (UART_RXDx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
UART Ch.x Receive Data Register (UART_RXDx)	0x4102	D7-0	RXD[7:0]	Receive data in the receive data buffer	0x0 to 0xff (0x7f)	0x0	R	Older data in the buffer is read out first.
	0x4122 (8 bits)			RXD7(6) = MSB RXD0 = LSB				

D[7:0] RXD[7:0]: Receive Data

Data in the receive data buffer is read out in sequence, starting with the oldest. Received data is placed in the receive data buffer. The receive data buffer is a 2-byte FIFO that allows proper data reception until it fills, even if data is not read out. If the buffer is full and the shift register also contains received data, an overrun error will occur, unless the data is read out before reception of the subsequent data starts.

The receive circuit includes two receive buffer status flags: RDRY/UART_STx register and RD2B/UART_STx register. The RDRY flag indicates the presence of valid received data in the receive data buffer, while the RD2B flag indicates the presence of two received data in the receive data buffer.

A receive buffer full interrupt occurs when the received data in the receive data buffer reaches the number specified by RBFU/UART_CTLx register.

0 is loaded into RXD7 in 7-bit mode.

Serial data input via the SINx pin is converted to parallel, with the initial bit as LSB, the High level bit as 1, and the Low level bit as 0. This data is then loaded into the receive data buffer.

This register is read-only. (Default: 0x0)

UART Ch.x Mode Register (UART_MODx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
UART Ch.x Mode Register (UART_MODx)	0x4103 0x4123 (8 bits)	D7-5	--	reserved	--	--	--	0 when being read.	
		D4	CHLN	Character length select	1 8 bits	0 7 bits	0	R/W	
		D3	PREN	Parity enable	1 With parity	0 No parity	0	R/W	
		D2	PMD	Parity mode select	1 Odd	0 Even	0	R/W	
		D1	STPB	Stop bit select	1 2 bits	0 1 bit	0	R/W	
		D0	--	reserved	--	--	--	--	0 when being read.

D[7:5] Reserved

D4 CHLN: Character Length Select Bit

Selects the serial transfer data length.

1 (R/W): 8 bits

0 (R/W): 7 bits (default)

D3 PREN: Parity Enable Bit

Enables the parity function.

1 (R/W): With parity

0 (R/W): No parity (default)

PREN is used to select whether received data parity checking is performed and whether a parity bit is added to transmit data. Setting PREN to 1 parity-checks the received data. A parity bit is automatically added to the transmit data. If PREN is set to 0, no parity bit is checked or added.

D2 PMD: Parity Mode Select Bit

Selects the parity mode.

1 (R/W): Odd parity

0 (R/W): Even parity (default)

Writing 1 to PMD selects odd parity; writing 0 to it selects even parity. Parity checking and parity bit addition are enabled only when PREN is set to 1. The PMD setting is disabled if PREN is 0.

D1 STPB: Stop Bit Select Bit

Selects the stop bit length.

1 (R/W): 2 bits

0 (R/W): 1 bit (default)

Writing 1 to STPB selects 2 stop bits; writing 0 to it selects 1 bit. The start bit is fixed at 1 bit.

D0 Reserved

UART Ch.x Control Register (UART_CTLx)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks		
UART Ch.x Control Register (UART_CTLx)	0x4104 0x4124 (8 bits)	D7	TEIEN	End of transmission int. enable	1	Enable	0	Disable	0	R/W	
		D6	REIEN	Receive error int. enable	1	Enable	0	Disable	0	R/W	
		D5	RIEN	Receive buffer full int. enable	1	Enable	0	Disable	0	R/W	
		D4	TIEN	Transmit buffer empty int. enable	1	Enable	0	Disable	0	R/W	
		D3-2	-	reserved			-	-	-	-	0 when being read.
		D1	RBF1	Receive buffer full int. condition setup	1	2 bytes	0	1 byte	0	R/W	
		D0	RXEN	UART enable	1	Enable	0	Disable	0	R/W	

D7 **TEIEN: End of Transmission Interrupt Enable Bit**

Enables interrupt requests to the ITC when transmit operation has completed.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Set this bit to 1 to terminate transmit processing using interrupts.

D6 **REIEN: Receive Error Interrupt Enable Bit**

Enables interrupt requests to the ITC when a receive error occurs.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Set this bit to 1 to process receive errors using interrupts.

D5 **RIEN: Receive Buffer Full Interrupt Enable Bit**

Enables interrupt requests to the ITC caused when the received data quantity in the receive data buffer reaches the quantity specified in RBF1.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Set this bit to 1 to read received data using interrupts.

D4 **TIEN: Transmit Buffer Empty Interrupt Enable Bit**

Enables interrupt requests to the ITC caused when transmission data in the transmit data buffer is sent to the shift register (i.e. when data transmission begins).

1 (R/W): Enabled

0 (R/W): Disabled (default)

Set this bit to 1 to write data to the transmit data buffer using interrupts.

D[3:2] **Reserved**D1 **RBF1: Receive Buffer Full Interrupt Condition Setup Bit**

Sets the quantity of data in the receive data buffer to generate a receive buffer full interrupt.

1 (R/W): 2 bytes

0 (R/W): 1 byte (default)

If receive buffer full interrupts are enabled (RIEN = 1), the UART outputs an interrupt request to the ITC when the quantity of received data specified by RBF1 is loaded into the receive data buffer.

If RBF1 is 0, an interrupt request is output as soon as one received data is loaded into the receive data buffer (when RDRY/UART_STx register is set to 1). If RBF1 is 1, an interrupt request is output as soon as two received data are loaded into the receive data buffer (when RD2B/UART_STx register is set to 1).

D0 **RXEN: UART Enable Bit**

Enables data transfer by the UART.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Set RXEN to 1 before starting UART transfers. Setting RXEN to 0 disables data transfers. Set the transfer conditions while RXEN is 0.

Disabling transfers by writing 0 to RXEN also clears the transmit data buffer.

UART Ch.x Expansion Register (UART_EXPx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
UART Ch.x Expansion Register (UART_EXPx)	0x4105	D7-1	–	reserved	–	–	–	0 when being read.
	0x4125 (8 bits)	D0	IRMD	IrDA mode select	1 On 0 Off	0	R/W	

D[7:1] Reserved

D0 IRMD: IrDA Mode Select Bit

Switches the IrDA interface function on and off.

1 (R/W): On

0 (R/W): Off (default)

Set IRMD to 1 to use the IrDA interface. When IRMD is set to 0, this module functions as a normal UART, with no IrDA functions.

UART Ch.x Baud Rate Register (UART_BRx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
UART Ch.x Baud Rate Register (UART_BRx)	0x4106 0x4126 (8 bits)	D7-0	BR[7:0]	Baud rate setting	0x0 to 0xff	0x0	R/W	

D[7:0] BR[7:0]: Baud Rate Setting Bits

Sets the initial counter value of the baud rate generator. (Default: 0x0)

The counter in the baud rate generator repeats counting from the value set in this register to occurrence of counter underflow to generate the transfer (sampling) clock.

Use the following equations to calculate the initial counter value for obtaining the desired transfer rate.

$$\text{bps} = \frac{\text{ct_clk}}{\{(BR + 1) \times 16 + \text{FMD}\}}$$

$$BR = \left(\frac{\text{ct_clk}}{\text{bps}} - \text{FMD} - 16 \right) \div 16$$

ct_clk: Count clock frequency (Hz)

BR: BR[7:0] setting (0 to 255)

bps: Transfer rate (bit/s)

FMD: FMD[3:0] (fine mode) setting (0 to 15)

UART Ch.x Fine Mode Register (UART_FMDx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
UART Ch.x	0x4107	D7-4	–	reserved	–	–	–	0 when being read.
Fine Mode Register (UART_FMDx)	0x4127 (8 bits)	D3-0	FMD[3:0]	Fine mode setup	0x0 to 0xf	0x0	R/W	Set a number of times to insert delay into a 16-underflow period.

D[7:4] Reserved

D[3:0] FMD[3:0]: Fine Mode Setup Bits

Corrects the transfer rate error. (Default: 0x0)

FMD[3:0] specifies the delay pattern to be inserted into a 16 underflow period of the baud rate generator output clock. Inserting one delay extends the output clock cycle by one count clock cycle.

Table 15.9.2 Delay Patterns Specified by FMD[3:0]

FMD[3:0]	Underflow number															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
0x0	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
0x1	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	D
0x2	–	–	–	–	–	–	–	D	–	–	–	–	–	–	–	D
0x3	–	–	–	–	–	–	–	D	–	–	–	D	–	–	–	D
0x4	–	–	–	D	–	–	–	D	–	–	–	D	–	–	–	D
0x5	–	–	–	D	–	–	–	D	–	–	–	D	–	D	–	D
0x6	–	–	–	D	–	D	–	D	–	–	–	D	–	D	–	D
0x7	–	–	–	D	–	D	–	D	–	D	–	D	–	D	–	D
0x8	–	D	–	D	–	D	–	D	–	D	–	D	–	D	–	D
0x9	–	D	–	D	–	D	–	D	–	D	–	D	–	D	D	D
0xa	–	D	–	D	–	D	D	D	–	D	–	D	–	D	D	D
0xb	–	D	–	D	–	D	D	D	–	D	D	D	–	D	D	D
0xc	–	D	D	D	–	D	D	D	–	D	D	D	–	D	D	D
0xd	–	D	D	D	–	D	D	D	–	D	D	D	D	D	D	D
0xe	–	D	D	D	D	D	D	D	–	D	D	D	D	D	D	D
0xf	–	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D

D: Indicates the insertion of a delay cycle.

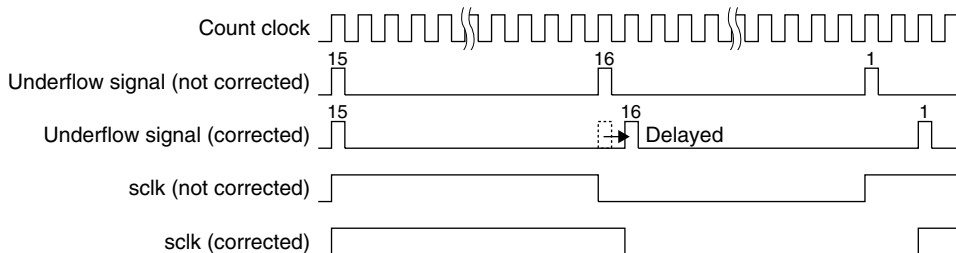


Figure 15.9.1 Delay Cycle Insertion in Fine Mode

UART Ch.x Clock Control Register (UART_CLKx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
UART Ch.x Clock Control Register (UART_CLKx)	0x506c 0x506d (8 bits)	D7-6	–	reserved	–	–	–	0 when being read.	
		D5-4	CLKDIV [1:0]	Clock division ratio select	CLKDIV[1:0]	Division ratio	0x0	R/W	When the clock source is IOSC or OSC3
					0x3	1/8			
					0x2	1/4			
					0x1	1/2			
		0x0	1/1						
D3-2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0]	Clock source	0x0	R/W			
			0x3	External clock					
0x2	OSC3								
0x1	OSC1								
0x0	IOSC								
D1	–	reserved	–	–	–	–	0 when being read.		
D0	CLKEN	Count clock enable	1	Enable	0	Disable	0	R/W	

D[7:6] Reserved

D[5:4] CLKDIV[1:0]: Clock Division Ratio Select Bits

Selects the division ratio for generating the count clock of the baud rate generator when IOSC or OSC3 is used as the clock source.

Table 15.9.3 IOSC/OSC3 Division Ratio Selection

CLKDIV[1:0]	Division ratio
0x3	1/8
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

D[3:2] CLKSRC[1:0]: Clock Source Select Bits

Selects the count clock source for the baud rate generator.

Table 15.9.4 Clock Source Selection

CLKSRC[1:0]	Clock source
0x3	External clock (EXCLx)
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x0)

D1 Reserved

D0 CLKEN: Count Clock Enable Bit

Enables or disables the count clock supply to the counter of the baud rate generator.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

The CLKEN default setting is 0, which disables the clock supply. Setting CLKEN to 1 sends the clock selected to the counter.

16 SPI

16.1 SPI Module Overview

The S1C17706 includes a synchronized serial interface module (SPI) with three communication channels. The following shows the main features of the SPI:

- Supports both master and slave modes.
- Data length: 8 bits fixed
- Supports both MSB first and LSB first modes.
- Contains one-byte receive data buffer and one-byte transmit data buffer.
- Supports full-duplex communications.
- Data transfer timing (clock phase and polarity variations) is selectable from among 4 types.
- Can generate receive buffer full and transmit buffer empty interrupts.

Figure 16.1.1 shows the SPI module configuration.

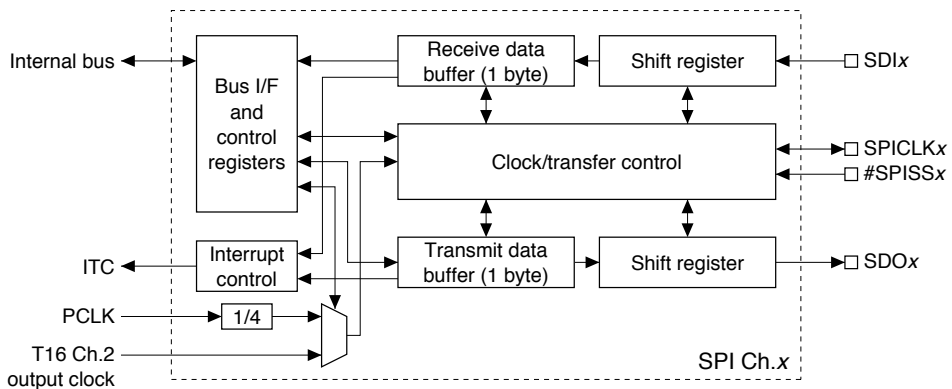


Figure 16.1.1 SPI Module Configuration (1 channel)

Note: Three channels in the SPI module have the same functions except for control register addresses. For this reason, the description in this chapter applies to all SPI channels. The 'x' in the register name indicates the channel number (0 to 2).

Example: SPI_CTLx register

Ch.0: SPI_CTL0 register

Ch.1: SPI_CTL1 register

Ch.2: SPI_CTL2 register

16.2 SPI Input/Output Pins

Table 16.2.1 lists the SPI pins.

Table 16.2.1 List of SPI Pins

Pin name	I/O	Qty	Function
SDI0 (Ch.0) SDI1 (Ch.1) SDI2 (Ch.2)	I	3	SPI Ch.x data input pin Inputs serial data from SPI bus.
SDO0 (Ch.0) SDO1 (Ch.1) SDO2 (Ch.2)	O or Hi-z	3	SPI Ch.x data output pin Outputs serial data to SPI bus. If the #SPISS pin is logical High in slave mode (slave mode is not selected), the Hi-z state is kept.

Pin name	I/O	Qty	Function
SPICLK0 (Ch.0)	I/O	3	SPI Ch.x external clock input/output pin
SPICLK1 (Ch.1)			Outputs SPI clock when SPI is in master mode.
SPICLK2 (Ch.2)			Inputs external clock when SPI is used in slave mode.
#SPISS0 (Ch.0)	I	3	SPI Ch.x slave select signal (active Low) input pin
#SPISS1 (Ch.1)			SPI (Slave mode) is selected as a slave device by Low input to this pin.
#SPISS2 (Ch.2)			

The SPI input/output pins (SDIx, SDOx, SPICLKx, #SPISSx) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as SPI input/output pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

Note: In master mode, use the general-purpose I/O port (P) to output a slave select signal.


16.3 SPI Clock

The master mode SPI generates the SPI clock using the 16-bit timer (T16) Ch.2 output clock or a PCLK/4 clock. This clock is output from the SPICLKx pin to the slave device while also driving the shift register.

Use MCLK/SPI_CTLx register to select whether the T16 Ch.2 output clock or PCLK/4 clock is used.

Setting MCLK to 1 selects the T16 Ch.2 output clock; setting to 0 selects the PCLK/4 clock.

Using the T16 Ch.2 output clock enables programmable transfer rates. For more information on T16 control, see the “16-bit Timers (T16)” chapter.

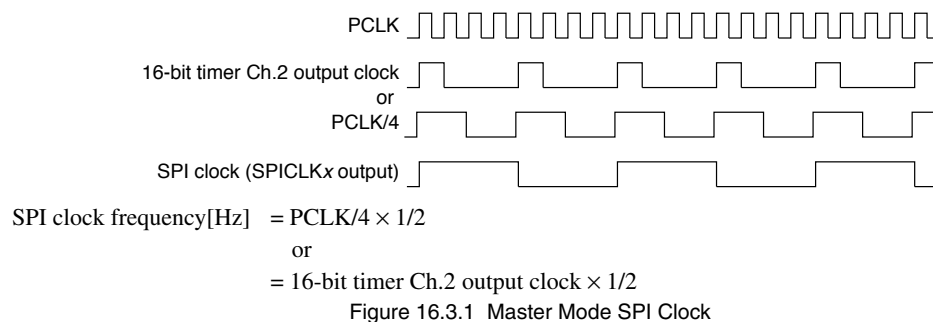

In slave mode, the SPI clock is input via the SPICLKx pin.

16.4 Data Transfer Condition Settings

The SPI module can be set to master or slave modes. The SPI clock polarity/phase and bit direction (MSB first/LSB first) can also be set via the SPI_CTLx register. The data length is fixed at 8 bits.

Note: Make sure the SPI module is halted (SPEN/SPI_CTLx register = 0) before master/slave mode selection and clock condition settings.

Master/slave mode selection

MSSL/SPI_CTLx register is used to set the SPI module to master mode or slave mode. Setting MSSL to 1 sets master mode; setting it to 0 (default) sets slave mode. In master mode, data is transferred using the internal clock. In slave mode, data is transferred by inputting the master device clock.

SPI clock polarity and phase settings

The SPI clock polarity is selected by CPOL/SPI_CTLx register. Setting CPOL to 1 treats the SPI clock as active Low; setting it to 0 (default) treats it as active High.

The SPI clock phase is selected by CPHA/SPI_CTLx register.

As shown below, these control bits set transfer timing.

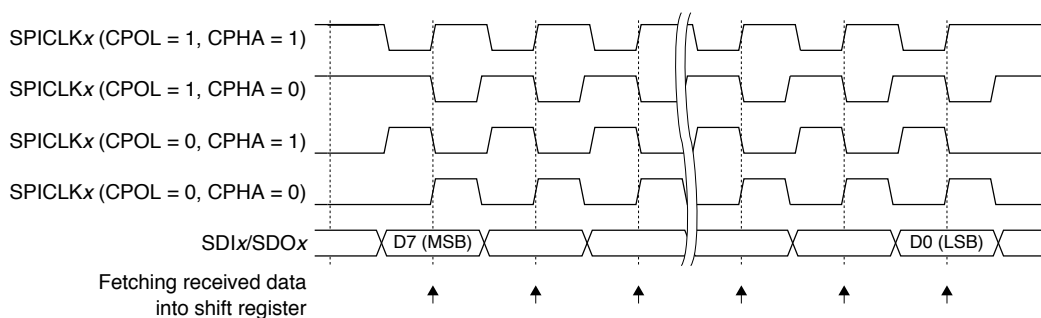


Figure 16.4.1 Clock and Data Transfer Timing

MSB first/LSB first settings

Use MLSB/SPI_CTLx register to select whether the data MSB or LSB is input/output first.

MSB first is selected when MLSB is 0 (default); LSB first is selected when MLSB is 1.

Note: When the SPI module is used in master mode with CPHA set to 0, the clock may change a minimum of one system clock cycle time from change of the first transmit data bit.

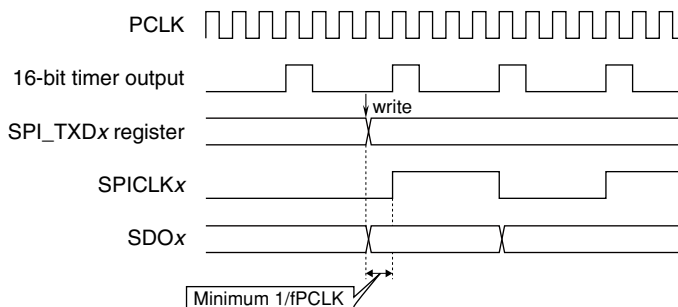


Figure 16.4.2 SDOx and SPICLKx Change Timings when CPHA = 0

The half SPICLKx cycle will be secured from change of data to change of the clock for the second and following transmit data bits and the second and following bytes during continuous transfer.

16.5 Data Transfer Control

Make the following settings before starting data transfers.

- (1) Select the SPI clock source. (See Section 16.3.)
- (2) Select master mode or slave mode. (See Section 16.4.)
- (3) Set clock conditions. (See Section 16.4.)
- (4) Set the interrupt conditions to use SPI interrupts. (See Section 16.6.)

Note: Make sure the SPI is halted (SPEN/SPI_CTLx register = 0) before setting the above conditions.

Enabling data transfers

Set SPEN/SPI_CTLx register to 1 to enable SPI operations. This enables SPI transfers and clock input/output.

Note: Do not set SPEN to 0 when the SPI module is transferring data.

Data transmission control

To start data transmission, write the transmit data to SPTDB[7:0]/SPI_TxDx register.

The data is written to the transmit data buffer, and the SPI module starts sending data. The buffer data is sent to the transmit shift register. In master mode, the module starts clock output from the SPICLKx pin. In slave mode, the module awaits clock input from the SPICLKx pin. The data in the shift register is shifted in sequence at the clock rising or falling edge, as determined by CPHA/SPI_CTLx register and CPOL/SPI_CTLx register (see Figure 16.4.1) and sent from the SDOx pin.

The SPI module includes two status flags for transfer control: SPTBE/SPI_ST x register and SPBSY/SPI_ST x register.

The SPTBE flag indicates the transmit data buffer status. This flag switches to 0 when the application program writes data to the SPI_TXD x register (transmit data buffer) and reverts to 1 when the buffer data is sent to the transmit shift register. An interrupt can be generated when this flag is set to 1 (see Section 16.6). Subsequent data is sent after confirming that the transmit data buffer is empty either by using this interrupt or by inspecting the SPTBE flag. The transmit data buffer size is 1 byte, but a shift register is provided separately to allow data to be written while the previous data is being sent. Always confirm that the transmit data buffer is empty before writing transmit data. Writing data while the SPTBE flag is 0 will overwrite earlier transmit data inside the transmit data buffer.

In master mode, the SPBSY flag indicates the shift register status. This flag switches to 1 when transmit data is loaded from the transmit data buffer to the shift register and reverts to 0 once the data is sent. Read this flag to check whether the SPI module is operating or at standby.

In slave mode, SPBSY flag indicates the SPI slave selection signal (#SPISS x pin) status. The flag is set to 1 when the SPI module is selected as a slave module and is set to 0 when the module is not selected.

Note: Do not set the transmit data to SPTDB when SPEN is set to 0.

Data reception control

In master mode, write dummy data to SPTDB[7:0]/SPI_TXD x register. Writing to the SPI_TXD x register creates the trigger for reception as well as transmission start. Writing actual transmit data enables simultaneous transmission and reception.

This starts the SPI clock output from the SPICLK x pin.

In slave mode, the module waits until the clock is input from the SPICLK x pin. There is no need to write to the SPI_TXD x register if no transmission is required. The receiving operation is started by the clock input from the master device. If data is transmitted simultaneously, write transmit data to the SPI_TXD x register before the clock is input.

The data is received in sequence in the shift register at the rising or falling edge of the clock determined by CPHA/SPI_CTL x register and CPOL/SPI_CTL x register. (See Figure 16.4.1.) The received data is loaded into the receive data buffer once the 8 bits of data are received in the shift register.

The received data in the buffer can be read from SPRDB[7:0]/SPI_RXD x register.

The SPI module includes SPRBF/SPI_ST x register for reception control.

The SPRBF flag indicates the receive data buffer status. This flag is set to 1 when the data received in the shift register is loaded into the receive data buffer, indicating that the received data can be read out. It reverts to 0 when the buffer data is read out from the SPI_RXD x register. An interrupt can be generated as soon as the flag is set to 1 (see Section 16.6). The received data should be read out either by using this interrupt or by inspecting the SPRBF flag to confirm that the receive data buffer contains valid received data. The receive data buffer is 1 byte in size, but a shift register is also provided, enabling received data to be retained in the buffer even while the subsequent data is being received. Note that the receive data buffer should be read out before receiving the subsequent data is complete. If receiving the subsequent data is complete before the receive data buffer contents are read out, the newly received data will overwrite the previous received data in the buffer.

In master mode, the SPBSY flag indicating the shift register status can be used in the same way while transferring data.

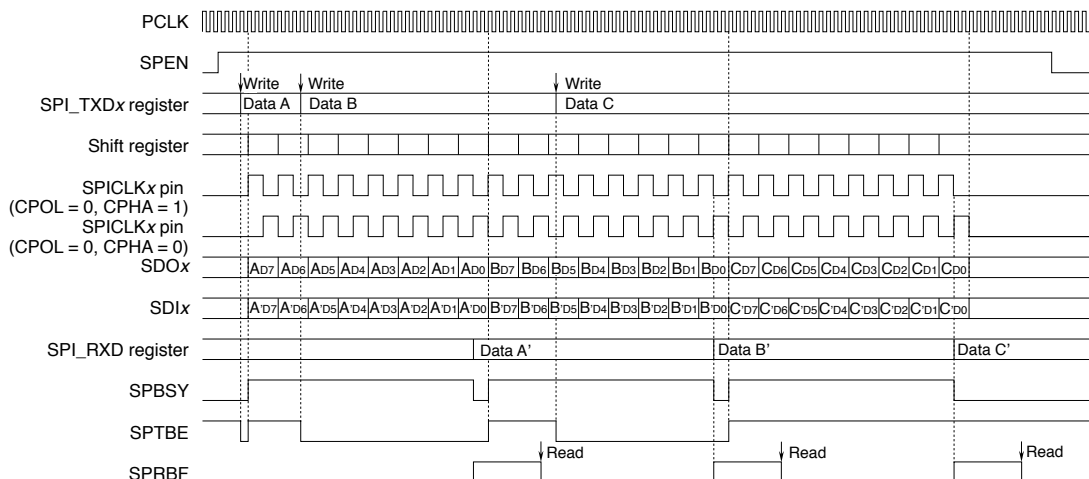


Figure 16.5.1 Data Transferring Timing Chart (MSB first)

Disabling data transfers

After a data transfer is completed (both transmission and reception), write 0 to SPEN to disable data transfers. Confirm that the SPTBE flag is 1 and the SPBSY flag is 0 before disabling data transfer.

The data being transferred cannot be guaranteed if SPEN is set to 0 while data is being sent or received.

16.6 SPI Interrupts

Each channel of the SPI module includes a function for generating the following two different types of interrupts.

- Transmit buffer empty interrupt
- Receive buffer full interrupt

The SPI channel outputs one interrupt signal shared by the two above interrupt causes to the interrupt controller (ITC). Inspect the status flag to determine the interrupt cause occurred.

Transmit buffer empty interrupt

To use this interrupt, set SPTIE/SPI_CTLx register to 1. If SPTIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When transmit data written to the transmit data buffer is transferred to the shift register, the SPI module sets SPTBE/SPI_STx register to 1, indicating that the transmit data buffer is empty. If transmit buffer empty interrupts are enabled (SPTIE = 1), an interrupt request is sent simultaneously to the ITC.

An interrupt occurs if other interrupt conditions are met. You can inspect the SPTBE flag in the SPI interrupt handler routine to determine whether the SPI interrupt is attributable to a transmit buffer empty. If SPTBE is 1, the next transmit data can be written to the transmit data buffer by the interrupt handler routine.

Receive buffer full interrupt

To use this interrupt, set SPRIE/SPI_CTLx register to 1. If SPRIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When data received in the shift register is loaded into the receive data buffer, the SPI module sets SPRBF/SPI_STx register to 1, indicating that the receive data buffer contains readable received data. If receive buffer full interrupts are enabled (SPRIE = 1), an interrupt request is output to the ITC at the same time.

An interrupt occurs if other interrupt conditions are met. You can inspect the SPRBF flag in the SPI interrupt handler routine to determine whether the SPI interrupt is attributable to a receive buffer full. If SPRBF is 1, the received data can be read from the receive data buffer by the interrupt handler routine.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

16.7 Control Register Details

Table 16.7.1 List of SPI Registers

Address	Register name		Function
0x4320	SPI_ST0	SPI Ch.0 Status Register	Indicates transfer and buffer statuses.
0x4322	SPI_TXD0	SPI Ch.0 Transmit Data Register	Transmit data
0x4324	SPI_RXD0	SPI Ch.0 Receive Data Register	Receive data
0x4326	SPI_CTL0	SPI Ch.0 Control Register	Sets the SPI mode and enables data transfer.
0x4380	SPI_ST1	SPI Ch.1 Status Register	Indicates transfer and buffer statuses.
0x4382	SPI_TXD1	SPI Ch.1 Transmit Data Register	Transmit data
0x4384	SPI_RXD1	SPI Ch.1 Receive Data Register	Receive data
0x4386	SPI_CTL1	SPI Ch.1 Control Register	Sets the SPI mode and enables data transfer.
0x43a0	SPI_ST2	SPI Ch.2 Status Register	Indicates transfer and buffer statuses.
0x43a2	SPI_TXD2	SPI Ch.2 Transmit Data Register	Transmit data
0x43a4	SPI_RXD2	SPI Ch.2 Receive Data Register	Receive data
0x43a6	SPI_CTL2	SPI Ch.2 Control Register	Sets the SPI mode and enables data transfer.

The SPI registers are described in detail below. These are 16-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

SPI Ch.x Status Registers (SPI_STx)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks
SPI Ch.x Status Register (SPI_STx)	0x4320	D15–3	–	reserved	–		–	–	0 when being read.
	0x4380	D2	SPBSY	Transfer busy flag (master)	1 Busy	0 Idle	0	R	
	0x43a0			ss signal low flag (slave)	1 ss = L	0 ss = H			
	(16 bits)	D1	SPRBF	Receive data buffer full flag	1 Full	0 Not full	0	R	
		D0	SPTBE	Transmit data buffer empty flag	1 Empty	0 Not empty	1	R	

D[15:3] Reserved

D2 SPBSY: Transfer Busy Flag Bit (Master Mode)/ss Signal Low Flag Bit (Slave Mode)

Master mode

Indicates the SPI transfer status.

1 (R): Operating

0 (R): Standby (default)

SPBSY is set to 1 when the SPI starts data transfer in master mode and is maintained at 1 while transfer is underway. It is cleared to 0 once the transfer is complete.

Slave mode

Indicates the slave selection (#SPISS_x) signal status.

1 (R): Low level (this SPI is selected)

0 (R): High level (this SPI is not selected) (default)

SPBSY is set to 1 when the master device asserts the #SPISS_x signal to select this SPI module (slave device). It is returned to 0 when the master device clears the SPI module selection by negating the #SPISS_x signal.

D1 SPRBF: Receive Data Buffer Full Flag Bit

Indicates the receive data buffer status.

1 (R): Data full

0 (R): No data (default)

SPRBF is set to 1 when data received in the shift register is sent to the receive data buffer (when receiving is completed), indicating that the data can be read. It reverts to 0 once the buffer data is read from the SPI_RXD_x register.

D0 SPTBE: Transmit Data Buffer Empty Flag Bit

Indicates the transmit data buffer status.

1 (R): Empty (default)

0 (R): Data exists

SPTBE is set to 0 when transmit data is written to the SPI_TXD_x register (transmit data buffer), and is set to 1 when the data is transferred to the shift register (when transmission starts).

Transmission data must be written to the SPI_TXD_x register when this bit is 1.

SPI Ch.x Transmit Data Registers (SPI_TXD_x)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
SPI Ch.x	0x4322	D15–8	–	reserved	–	–	–	0 when being read.
Transmit Data Register (SPI_TXD _x)	0x4382 0x43a2 (16 bits)	D7–0	SPTDB[7:0]	SPI transmit data buffer SPTDB7 = MSB SPTDB0 = LSB	0x0 to 0xff	0x0	R/W	

D[15:8] Reserved

D[7:0] SPTDB[7:0]: SPI Transmit Data Buffer Bits

Sets transmit data to be written to the transmit data buffer. (Default: 0x0)

In master mode, transmission is started by writing data to this register. In slave mode, the contents of this register are sent to the shift register and transmission begins when the clock is input from the master.

SPTBE/SPI_ST_x register is set to 1 (empty) as soon as data written to this register has been transferred to the shift register. A transmit buffer empty interrupt is generated at the same time. The subsequent transmit data can then be written, even while data is being transmitted.

Serial converted data is output from the SDO_x pin, with the bit set to 1 as High level and the bit set to 0 as Low level.

Note: Make sure that SPEN is set to 1 before writing data to the SPI_TXD_x register to start data transmission/reception.

SPI Ch.x Receive Data Registers (SPI_RXD_x)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
SPI Ch.x	0x4324	D15–8	–	reserved	–	–	–	0 when being read.
Receive Data Register (SPI_RXD _x)	0x4384 0x43a4 (16 bits)	D7–0	SPRDB[7:0]	SPI receive data buffer SPRDB7 = MSB SPRDB0 = LSB	0x0 to 0xff	0x0	R	

D[15:8] Reserved

D[7:0] SPRDB[7:0]: SPI Receive Data Buffer Bits

Contains the received data. (Default: 0x0)

SPRBF/SPI_ST_x register is set to 1 (data full) as soon as data is received and the shift register data has been transferred to the receive data buffer. A receive buffer full interrupt is generated at the same time. Data can then be read until subsequent data is received. If receiving the subsequent data is completed before the register has been read out, the new received data overwrites the contents.

Serial data input from the SDI_x pin is converted to parallel, with the High level bit set to 1 and the Low level bit set to 0. The data is loaded into this register.

This register is read-only.

SPI Ch.x Control Registers (SPI_CTLx)

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks
SPI Ch.x Control Register (SPI_CTLx) (16 bits)	0x4326	D15–10	–	reserved	–			–	–	0 when being read.
	0x4386	D9	MCLK	SPI clock source select	1	T16 Ch.2	0	PCLK/4	0	R/W
	0x43a6	D8	MSLB	LSB/MSB first mode select	1	LSB	0	MSB	0	R/W
		D7–6	–	reserved	–			–	–	0 when being read.
		D5	SPRIE	Receive data buffer full int. enable	1	Enable	0	Disable	0	R/W
		D4	SPTIE	Transmit data buffer empty int. enable	1	Enable	0	Disable	0	R/W
		D3	CPHA	Clock phase select	1	Data out	0	Data in	0	R/W
		D2	CPOL	Clock polarity select	1	Active L	0	Active H	0	R/W
		D1	MSSL	Master/slave mode select	1	Master	0	Slave	0	R/W
		D0	SPEN	SPI enable	1	Enable	0	Disable	0	R/W

Note: Do not access to the SPI_CTLx register while SPBSY/SPI_STx register is set to 1 or SPRBF/SPI_STx register is set to 1 (while data is being transmitted/received).

D[15:10] Reserved

D9 **MCLK: SPI Clock Source Select Bit**

Selects the SPI clock source.

1 (R/W): 16-bit timer Ch.2

0 (R/W): PCLK/4 (default)

D8 **MSLB: LSB/MSB First Mode Select Bit**

Selects whether data is transferred with MSB first or LSB first.

1 (R/W): LSB first

0 (R/W): MSB first (default)

D[7:6] Reserved

D5 **SPRIE: Receive Data Buffer Full Interrupt Enable Bit**

Enables or disables SPI receive data buffer full interrupts.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting SPRIE to 1 enables the output of SPI interrupt requests to the ITC due to a receive data buffer full. These interrupt requests are generated when the data received in the shift register is transferred to the receive data buffer (when reception is completed).

SPI interrupts are not generated by receive data buffer full if SPRIE is set to 0.

D4 **SPTIE: Transmit Data Buffer Empty Interrupt Enable Bit**

Enables or disables SPI transmit data buffer empty interrupts.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting SPTIE to 1 enables the output of SPI interrupt requests to the ITC due to a transmit data buffer empty. These interrupt requests are generated when the data written to the transmit data buffer is transferred to the shift register (when transmission starts).

SPI interrupts are not generated by transmit data buffer empty if SPTIE is set to 0.

D3 **CPHA: Clock Phase Select Bit**

Selects the SPI clock phase. (Default: 0)

Set the data transfer timing together with CPOL. (See Figure 16.7.1.)

D2 **CPOL: Clock Polarity Select Bit**

Selects the SPI clock polarity.

1 (R/W): Active Low

0 (R/W): Active High (default)

Set the data transfer timing together with CPHA. (See Figure 16.7.1.)

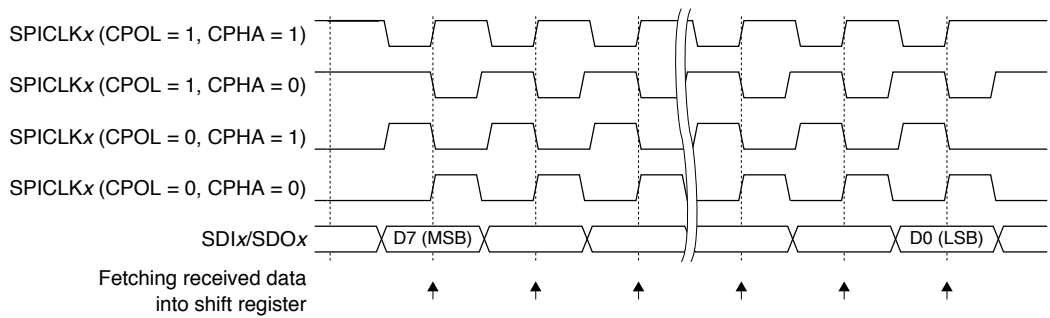


Figure 16.7.1 Clock and Data Transfer Timing

D1 MSSL: Master/Slave Mode Select Bit

Sets the SPI module to master or slave mode.

1 (R/W): Master mode

0 (R/W): Slave mode (default)

Setting MSSL to 1 selects master mode; setting it to 0 selects slave mode. Master mode performs data transfer with the internal clock. In slave mode, data is transferred by inputting the clock from the master device.

D0 SPEN: SPI Enable Bit

Enables or disables SPI module operation.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting SPEN to 1 starts the SPI module operation, enabling data transfer.

Setting SPEN to 0 stops the SPI module operation.

Note: The SPEN bit should be set to 0 before setting the CPHA, CPOL, and MSSL bits.

17 I²C Master (I2CM)

17.1 I2CM Module Overview

The S1C17706 includes an I²C master (I2CM) module that supports two-wire communications. The I2CM module operates as an I²C bus master device and can communicate with I²C-compliant slave devices.

The following shows the main features of I2CM:

- Operates as an I²C bus master device (as single master only).
- Supports standard (100 kbps) and fast (400 kbps) modes.
- Supports 8-bit data length only (MSB first).
- 7-bit addressing mode (10-bit addressing is possible by software control.)
- Includes one-byte receive data buffer and one-byte transmit data buffer.
- Can generate start, repeated start, and stop conditions.
- Supports half-duplex communications.
- Supports clock stretch function.
- Includes a noise filter function to help improve the reliability of data transfers.
- Can generate transmit buffer empty and receive buffer full interrupts.

Figure 17.1.1 shows the I2CM configuration.

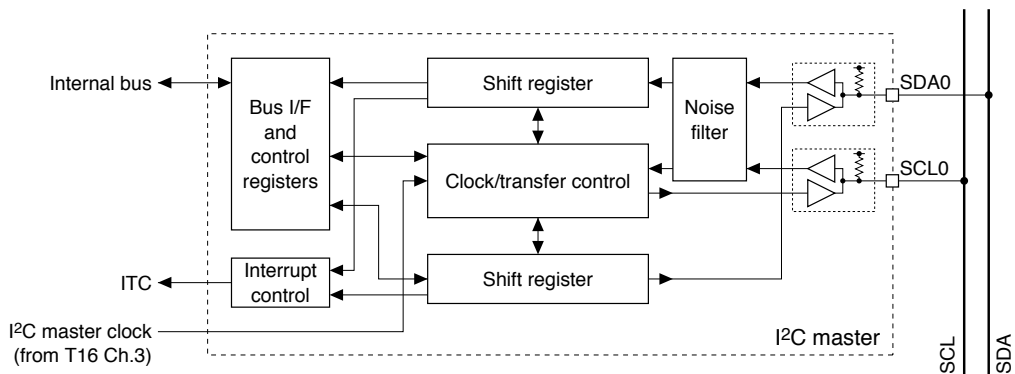


Figure 17.1.1 I2CM Module Configuration

17.2 I2CM Input/Output Pins

Table 17.2.1 lists the I2CM pins.

Table 17.2.1 List of I2CM Pins

Pin name	I/O	Qty	Function
SDA0	I/O	1	I2CM data input/output pin (see Note below) Inputs serial data from the I ² C bus. Also outputs serial data to the I ² C bus.
SCL0	I/O	1	I2CM clock input/output pin (see Note below) Inputs SCL line status. Also outputs a serial clock.

Note: The pins go to high impedance status when the port function is switched.

The I2CM input/output pins (SDA0, SCL0) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as I2CM input/output pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

17.3 Synchronization Clock

The I2CM module uses the internal clock (I2CM clock) output by the 16-bit timer (T16) Ch.3 as the synchronization clock. This clock is output from the SCL0 pin to the slave device while also driving the shift register. The clock should be programmed to output a signal matching the transfer rate from T16 Ch.3. For more information on T16 control, see the “16-bit Timers (T16)” chapter.

Note that the supported transfer rate is 50 kbps in standard mode and 200 kbps in fast mode if communication is made with a slave device having the clock stretch function.

The I2CM module does not function as a slave device. The SCL0 input pin is used to check the I²C bus SCL signal status. It is not used for synchronization clock input.

17.4 Settings Before Data Transfer

The I2CM module includes an optional noise filter function that can be selected via the application program.

Noise filter function

The I2CM module includes a function for filtering noise from the SDA0 and SCL0 pin input signals. This function is enabled by setting NSERM/I2CM_CTL register to 1. Note that using this function requires setting the I2CM clock (T16 Ch.3 output clock) frequency to 1/6 or less of PCLK.

17.5 Data Transfer Control

Make the following settings before starting data transfers.

- (1) Configure T16 Ch.3 to output the I2CM clock. (See the T16 module chapter.)
- (2) Select the option function. (See Section 17.4.)
- (3) Set the interrupt conditions to use I2CM interrupts. (See Section 17.6.)

Note: Make sure the I2CM module is halted (I2CMEN/I2CM_EN register = 0) before changing the above settings.

Enabling data transfers

Set I2CMEN/I2CM_EN register to 1 to enable I2CM operations. This enables I2CM transfers and clock input/output.

Note: Do not set I2CMEN to 0 when the I2CM module is transferring data.

Starting Data transfer

To start data transfers, the I²C master (this module) must generate a start condition. The slave address is then sent to establish communications.

(1) Generating start condition

The start condition applies when the SCL line is maintained at High and the SDA line is pulled down to Low.

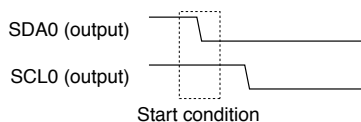


Figure 17.5.1 Start Condition


The start condition is generated by setting STRT/I2CM_CTL register to 1.

STRT is automatically reset to 0 once the start condition is generated. The I²C bus is busy from this point on.



(2) Slave address transmission

Once the start condition has been generated, the I²C master (this module) sends a bit indicating the slave address and transfer direction for communications. I²C slave addresses are either 7-bit or 10-bit. This module uses an 8-bit transfer data register to send the slave address and transfer direction bit, enabling single transfers in 7-bit address mode. In 10-bit mode, data is sent twice under software control. Figure 17.5.2 shows the configuration of the address data.

7-bit address

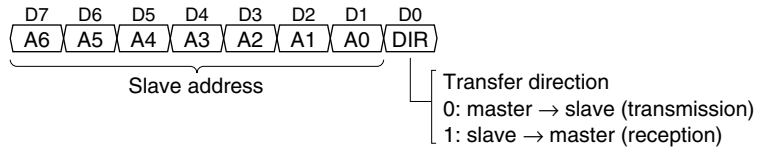

10-bit address

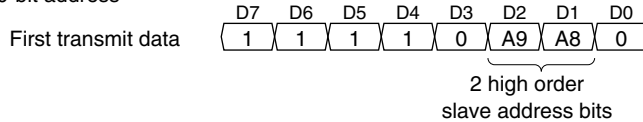

(When receiving data)

Issue a repeated start after the second data has been sent and then send the third data as shown below.

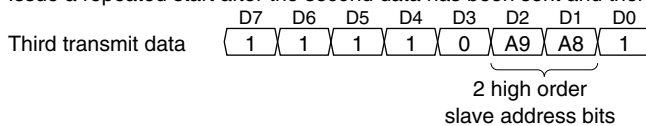


Figure 17.5.2 Transmit Data Specifying Slave Address and Transfer Direction

The transfer direction bit indicates the data transfer direction after the slave address has been sent. This is set to 0 when sending data from the master to the slave and to 1 when receiving data from the slave. To send a slave address, set the address with the transfer direction bit to RTDT[7:0]/I2CM_DAT register. At the same time, set TXE/I2CM_DAT register transmitting the address to 1.

After the slave address has been output, data can be sent and received as many times as required. Data must be sent or received according to the transfer direction set together with the slave address.

Data transmission control

The procedure for transmitting data is described below. Data transmission is performed by the same procedure as for slave address transmission.

To send byte data, set the transmit data to RTDT[7:0] and set TXE to 1 to transmit 1 byte.

When TXE is set to 1, the I2CM module begins data transmission in sync with the clock. If the previous data is currently being transmitted, data transmission starts after this has been completed. The I2CM module first transfers the data written to the shift register, then starts outputting the clock from the SCL0 pin. TXE is reset to 0 at this point and a cause of interrupt occurs, enabling the subsequent transmission data and TXE to be set.

The data bits in the shift register are shifted in sequence at the clock falling edge and output via the SDA0 pin with the MSB leading. The I2CM module outputs 9 clocks with each data transmission. In the 9th clock cycle, the I2CM module sets the SDA line into high impedance to receive an ACK or NAK sent from the slave device. The slave device returns ACK (0) to the master if the data is received. If the data is not received, the SDA line is not pulled down, which the I2CM module interprets to mean a NAK (1) (transmission failed).

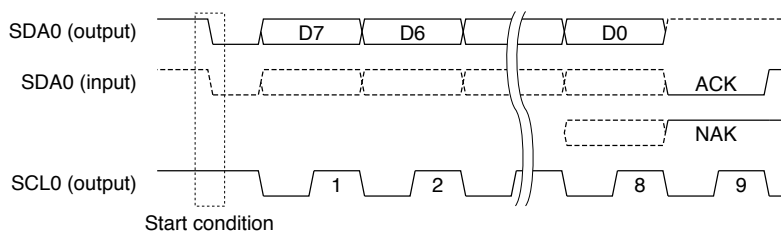


Figure 17.5.3 ACK and NAK

The I2CM module includes two status bits for transmission control: TBUSY/I2CM_CTL register and RTACK/I2CM_DAT register.

The TBUSY flag indicates the data transmission status. This flag becomes 1 when transmission starts (including slave address transmission) and reverts to 0 once data transmission ends. Inspect the flag to check whether the I2CM module is currently transmitting or at standby.

The RTACK bit indicates whether or not the slave device returned an ACK for the previous transmission. RTACK is 0 if an ACK was returned and 1 if ACK was not returned.

Data reception control

The procedure for receiving data is described below. When receiving data, the slave address must be sent with the transfer direction bit set to 1.

To receive data, set RXE/I2CM_DAT register to 1 for receiving 1 byte. When TXE/I2CM_DAT register is set to 1 for sending the slave address, RXE can also be set to 1 at the same time. If both TXE and RXE are set to 1, TXE takes priority.

When RXE is set to 1, allowing receiving to start, the I2CM module starts outputting the clock from the SCL0 pin with the SDA line at high impedance. The data is loaded to the shift register in sequence synchronized with the clock, with the MSB leading.

RXE is reset to 0 when D7 is loaded.

The received data is loaded to RTDT[7:0] once the 8-bit data has been received in the shift register.

The I2CM module includes two status bits for receive control: RBRDY/I2CM_DAT register and RBUSY/I2CM_CTL register.

The RBRDY flag indicates the received data status. This flag becomes 1 when the data received in the shift register is loaded to RTDT[7:0] and reverts to 0 when the received data is read out from RTDT[7:0]. Interrupts can also be generated once the flag value becomes 1.

The RBUSY flag indicates the receiving operation status. This flag is 1 when receiving starts and reverts to 0 when the data is received. Inspect the flag to determine whether the I2CM module is currently receiving or in standby.

The I2CM module outputs 9 clocks with each data reception. In the 9th clock cycle, an ACK or NAK is sent to the slave via the SDA0 pin. The bit state sent can be set in RTACK/I2CM_DAT register. To send ACK, set RTACK to 0. To send NAK, set RTACK to 1.

End of data transfers (Generating stop condition)

To end data transfers after all data has been transferred, the I²C master (this module) must generate a stop condition. The stop condition applies when the SCL line is maintained at High and the SDA line is pulled up from Low to High.

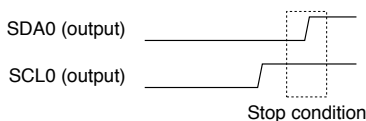


Figure 17.5.4 Stop Condition

The stop condition is generated by setting STP/I2CM_CTL register to 1.

When STP is set to 1, the I2CM module pulls up the I²C bus SDA line from Low to High with the SCL line maintained at High to generate a stop condition. The I²C bus subsequently switches to free state.

Before STP can be set to 1, confirm that TBUSY or RBUSY is reset to 0 from 1 (this indicates that the I2CM module has finished data transmit/receive operation) and then make the wait time longer than 1/4 of the I²C

clock cycle set. If I²C master communicate with slave device which has clock stretch function, STP can not be set to 1 until slave device finishes clock stretching. For this case, wait time is necessary before STP is set to 1. STP is reset to 0 when the stop condition is generated.

Continuing data transfer (Generating Repeated start condition)

To make it possible to continue with a different data transfer after data transfer completion, the I²C master (this module) can generate a repeated start condition.




Figure 17.5.5 Repeated Start Condition

The repeated start condition is generated by setting STRT/I2CM_CTL register to 1 when the I²C bus is busy. STRT is automatically reset to 0 once the repeated start condition is generated. Slave address transmission is subsequently possible with the I²C bus remaining in the busy state.

Disabling data transfer

After the stop condition has been generated, write 0 to I2CEN to disable data transfers. To determine whether the stop condition has been generated, check to see if STP is automatically cleared to 0 after it is set to 1 by polling. When I2CMEN is set to 0 while the I²C bus is in busy status, the SCL0 and SDA0 output levels and transfer data at that point cannot be guaranteed.

Timing chart

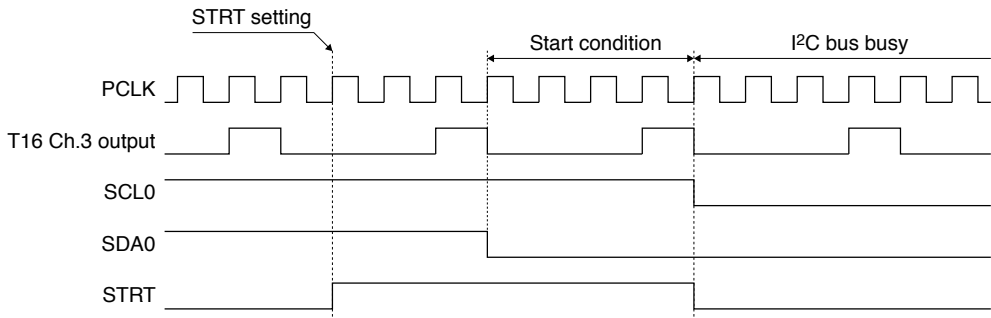


Figure 17.5.6 Start Condition Generation

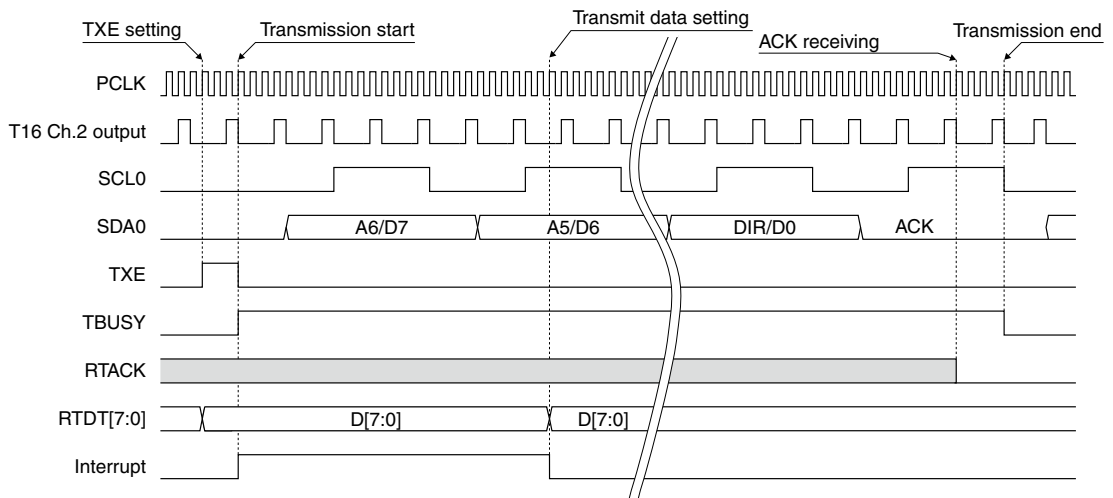


Figure 17.5.7 Slave Address Transmission/Data Transmission

17 I²C MASTER (I2CM)

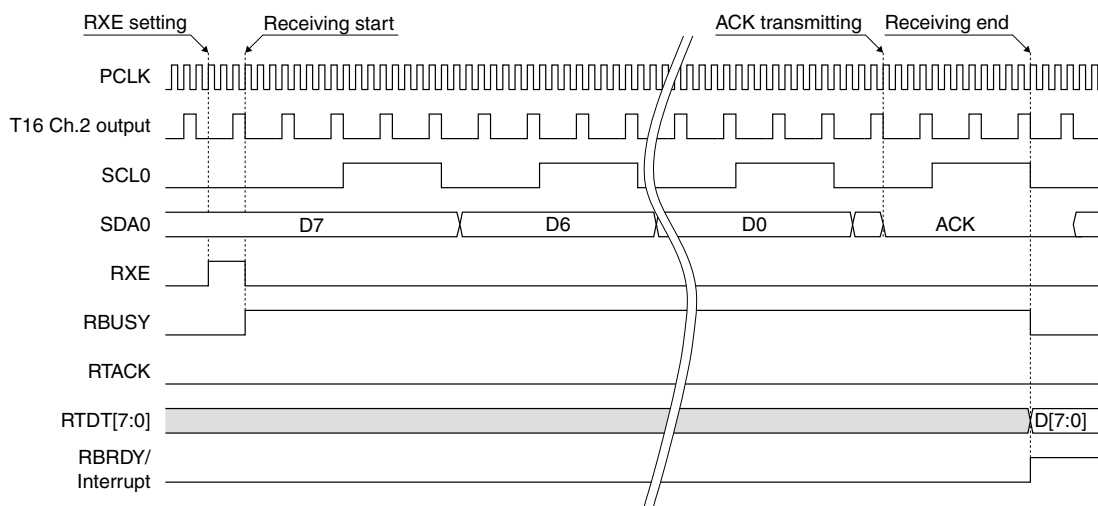


Figure 17.5.8 Data Receiving

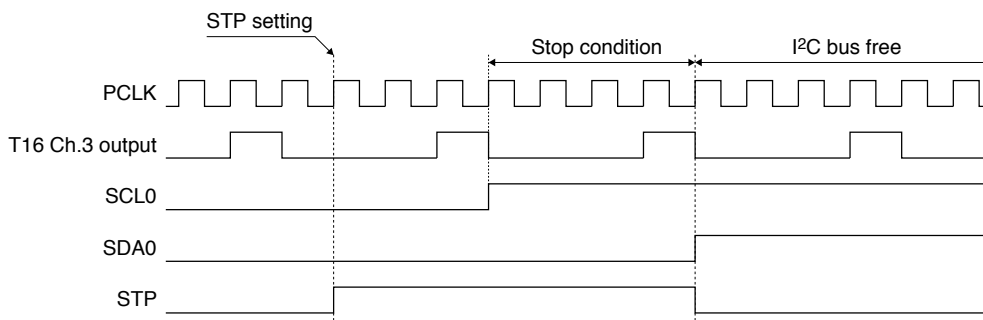


Figure 17.5.9 Stop Condition Generation

17.6 I2CM Interrupts

The I2CM module includes a function for generating the following two different types of interrupts.

- Transmit buffer empty interrupt
- Receive buffer full interrupt

The I2CM module outputs one interrupt signal shared by the two above interrupt causes to the interrupt controller (ITC).

Transmit buffer empty interrupt

To use this interrupt, set TINTE/I2CM_ICTL register to 1. If TINTE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

If transmit buffer empty interrupts are enabled (TINTE = 1), an interrupt request is output to the ITC as soon as the transmit data set in RTDT[7:0]/I2CM_DAT register is transferred to the shift register.

An interrupt occurs if other interrupt conditions are satisfied.

Transmit buffer empty interrupt occurs when the data was only sent.

- The clear method of transmit buffer empty flag

Write the data to RTDT/I2CM_DAT.

When TXE/I2CM_DAT is 0, the data doesn't send and the flag is only cleared.

Receive buffer full interrupt

To use this interrupt, set RINTE/I2CM_ICTL register to 1. If RINTE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

If receive buffer full interrupts are enabled (RINTE = 1), an interrupt request is output to the ITC as soon as the data received in the shift register is loaded to RTDT[7:0].

An interrupt occurs if other interrupt conditions are met.

Receive buffer full interrupt occurs when the data was only received.

- The clear method of receive buffer full flag
Read the data from RTDT/I2CM_DAT.

Note: When I2CM interrupt occurs, decide the transmit buffer empty interrupt or the receive buffer full interrupt by the program sequence of the I²C master. There're not registers to decide which interrupt occurred.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

17.7 Control Register Details

Table 17.7.1 List of I2CM Registers

Address	Register name		Function
0x4340	I2CM_EN	I ² C Master Enable Register	Enables the I ² C master module.
0x4342	I2CM_CTL	I ² C Master Control Register	Controls the I ² C master operation and indicates transfer status.
0x4344	I2CM_DAT	I ² C Master Data Register	Transmit/receive data
0x4346	I2CM_ICTL	I ² C Master Interrupt Control Register	Controls the I ² C master interrupt.

The I2CM module registers are described in detail below. These are 16-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

I²C Master Enable Register (I2CM_EN)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Master Enable Register (I2CM_EN)	0x4340 (16 bits)	D15–1	–	reserved	–	–	–	0 when being read.
		D0	I2CMEN	I ² C master enable	1 Enable 0 Disable	0	R/W	

D[15:1] **Reserved**

D0 **I2CMEN: I²C Master Enable Bit**

Enables or disables I2CM module operation.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting I2CMEN to 1 starts the I2CM module operation, enabling data transfer. Setting I2CMEN to 0 stops the I2CM module operation.

I²C Master Control Register (I2CM_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Master Control Register (I2CM_CTL)	0x4342 (16 bits)	D15–10	–	reserved	–	–	–	0 when being read.
		D9	RBUSY	Receive busy flag	1 Busy 0 Idle	0	R	
		D8	TBUSY	Transmit busy flag	1 Busy 0 Idle	0	R	
		D7–5	–	reserved	–	–	–	0 when being read.
		D4	NSERM	Noise remove on/off	1 On 0 Off	0	R/W	
		D3–2	–	reserved	–	–	–	0 when being read.
		D1	STP	Stop control	1 Stop 0 Ignored	0	R/W	
		D0	STRT	Start control	1 Start 0 Ignored	0	R/W	

D[15:10] **Reserved**

D9 **RBUSY: Receive Busy Flag Bit**

Indicates the I2CM receiving status.

1 (R): Operating

0 (R): Standby (default)

RBUSY is set to 1 when the I2CM starts data receiving and is maintained at 1 while receiving is under-

way. It is cleared to 0 once reception is completed.

D8 TBUSY: Transmit Busy Flag Bit

Indicates the I2CM transmission status.

1 (R): Operating

0 (R): Standby (default)

TBUSY is set to 1 when the I2CM starts data transmission and is maintained at 1 while transmission is underway. It is cleared to 0 once transmission is completed.

D[7:5] Reserved

D4 NSERM: Noise Remove On/Off Bit

Turns the noise filter function on or off.

1 (R/W): On

0 (R/W): Off (default)

The I2CM module includes a function for filtering noise from the SDA0 and SCL0 pin input signals. This function is enabled by setting NSERM to 1. Note that using this function requires setting the I2CM clock (T16 Ch.3 output clock) frequency to 1/6 or less of PCLK.

D[3:2] Reserved

D1 STP: Stop Control Bit

Generates the stop condition.

1 (R/W): Stop condition generated

0 (R/W): Ineffective (default)

By setting STP to 1, the I2CM module generates the stop condition by pulling up the I²C bus SDA line from Low to High with the SCL line maintaining at High. The I²C bus subsequently becomes free. Note that the stop condition will be generated only if STP is 1 and TXE/I2CM_DAT register, RXE/I2CM_DAT register, and STRT are set to 0 when data transfer is completed (including ACK transfer). STP is automatically reset to 0 if the stop condition is generated.

D0 STRT: Start Control Bit

Generates the start condition.

1 (R/W): Start condition generated

0 (R/W): Ineffective (default)

By setting STRT to 1, the I2CM module generates the start condition by pulling down the I²C bus SDA line to Low with SCL line maintaining at High.

The repeated start condition can be generated by setting STRT to 1 when the I²C bus is busy.

STRT is automatically reset to 0 once the start condition or repeated start condition is generated. The I²C bus subsequently becomes busy.

I²C Master Data Register (I2CM_DAT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Master Data Register (I2CM_DAT)	0x4344 (16 bits)	D15–12	--	reserved		--	--	0 when being read.
		D11	RBRDY	Receive buffer ready flag	1 Ready 0 Empty	0	R	
		D10	RXE	Receive execution	1 Receive 0 Ignored	0	R/W	
		D9	TXE	Transmit execution	1 Transmit 0 Ignored	0	R/W	
		D8	RTACK	Receive/transmit ACK	1 Error 0 ACK	0	R/W	
		D7–0	RTDT[7:0]	Receive/transmit data RTDT7 = MSB RTDT0 = LSB		0x0 to 0xff	0x0	R/W

D[15:12] Reserved

D11 **RBRDY: Receive Buffer Ready Flag Bit**

Indicates the receive buffer status.

- 1 (R): Receive data exists
- 0 (R): No receive data (default)

The RBRDY flag becomes 1 when the data received in the shift register is loaded to RTDT[7:0] and reverts to 0 when the receive data is read out from RTDT[7:0]. Interrupts can also be generated once the flag value becomes 1.

D10 **RXE: Receive Execution Bit**

Receives 1 byte of data.

- 1 (R/W): Data reception start
- 0 (R/W): Ineffective (default)

Setting RXE to 1 and TXE to 0 starts receiving for 1 byte of data. RXE can be set to 1 for subsequent reception, even if the slave address is being sent or data is being received. RXE is reset to 0 as soon as D6 is loaded to the shift register.

D9 **TXE: Transmit Execution Bit**

Transmits 1 byte of data.

- 1 (R/W): Data transmission start
- 0 (R/W): Ineffective (default)

Transmission is started by setting the transmit data to RTDT[7:0] and writing 1 to TXE. TXE can be set to 1 for subsequent transmission, even if the slave address or data is being sent. TXE is reset to 0 as soon as the data set in RTDT[7:0] is transferred to the shift register.

D8 **RTACK: Receive/Transmit ACK Bit**

When transmitting data

Indicates the response bit status.

- 1 (R/W): Error (NAK)
- 0 (R/W): ACK (default)

RTACK becomes 0 when ACK is returned from the slave after 1 byte of data is sent, indicating that the slave has received the data correctly. If RTACK is 1, the slave device is not operating or the data was not received correctly.

When receiving data

Sets the response bit sent to the slave.

- 1 (R/W): Error (NAK)
- 0 (R/W): ACK (default)

To return an ACK after data has been received, RTACK should be set to 0 before the I2CM module sends the response bit. To return a NAK, set RTACK to 1.

D[7:0] **RTDT[7:0]: Receive/Transmit Data Bits**

When transmitting data

Sets the transmit data. (Default: 0x0)

Data transmission is started by setting TXE to 1. If a slave address or data is currently being transmit-

ted, transmission begins once the previous transmission is completed. Serial converted data is output from the SDA0 pin with MSB leading and bits set to 0 as Low level. A cause of transmit buffer empty interrupt is generated as soon as the data written to this register is transferred to the shift register, after which the subsequent transmission data can be written.

When receiving data

The received data can be read out. (Default: 0x0)

Data reception is started by setting RXE to 1. If a slave address is currently being transmitted or data is currently being received, the new reception starts once the previous data has been transferred. The RBRDY flag is set and a cause of receive buffer full interrupt generated as soon as reception is completed and the shift register data is transferred to this register. Data can then be read until the subsequent data has been received. If the subsequent data is received before this register is read out, the contents are overwritten by the most recent received data. Serial data input from the SDA0 pin with MSB leading is converted to parallel, with the High level bit set to 1 and the Low level bit set to 0, then loaded to this register.

I²C Master Interrupt Control Register (I2CM_ICTL)

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks	
I ² C Master Interrupt Control Register (I2CM_ICTL)	0x4346 (16 bits)	D15-2	-	reserved	-			-	-	0 when being read.	
		D1	RINTE	Receive interrupt enable	1	Enable	0	Disable	0	R/W	
		D0	TINTE	Transmit interrupt enable	1	Enable	0	Disable	0	R/W	

D[15:2] Reserved

D1 RINTE: Receive Interrupt Enable Bit

Enables or disables I2CM receive buffer full interrupts.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting RINTE to 1 enables the output of I2CM interrupt requests to the ITC due to a receive data buffer full. These interrupt requests are generated when the data received in the shift register is transferred to RTDT[7:0]/I2CM_DAT register (when reception is completed).

I2CM interrupts are not generated by receive data buffer full if RINTE is set to 0.

D0 TINTE: Transmit Interrupt Enable Bit

Enables or disables I2CM transmit buffer empty interrupts.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting TINTE to 1 enables the output of I2CM interrupt requests to the ITC due to a transmit buffer empty. These interrupt requests are generated when the data written to RTDT[7:0] is transferred to the shift register.

I2CM interrupts are not generated by transmit buffer empty if TINTE is set to 0.

18 I²C Slave (I2CS)

18.1 I2CS Module Overview

The S1C17706 includes an I²C slave (I2CS) module that supports two-wire communications. The I2CS module operates as an I²C bus slave device and can communicate with an I²C-compliant master device.

The following shows the main features of I2CS:

- Operates as an I²C bus slave device.
- Supports standard (100 kbps) and fast (400 kbps) modes.
- Supports 8-bit data length only (MSB first).
- Supports 7-bit addressing mode.
- Includes one-byte receive data buffer and one-byte transmit data buffer.
- Can detect start and stop conditions.
- Supports half-duplex communications.
- Supports clock stretch function.
- Supports forced bus release function.
- Includes a noise filter function to help improve the reliability of data transfers.
- Can generate transmit buffer empty, receive buffer full, and bus status interrupts.

Figure 18.1.1 shows the I2CS configuration.

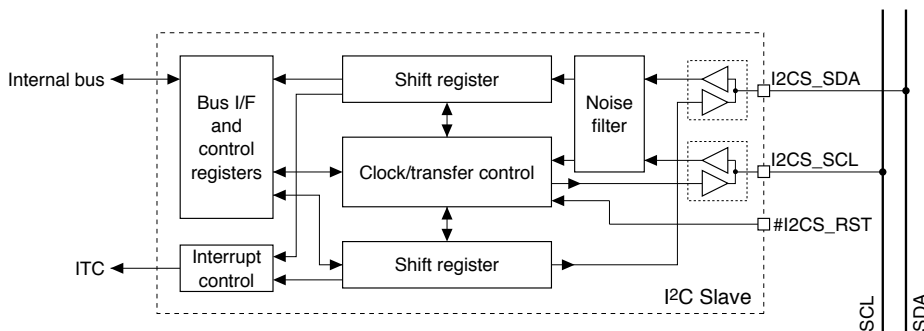


Figure 18.1.1 I2CS Module Configuration

Note: The I2CS module does not support general call address and 10-bit address mode.

18.2 I2CS Input/Output Pins

Table 18.2.1 lists the I2CS pins.

Table 18.2.1 List of I2CS Pins

Pin name	I/O	Qty	Function
SDA1	I/O	1	I2CS data input/output pin (see Note below) Inputs serial data from the I ² C bus. Also outputs serial data to the I ² C bus.
SCL1	I/O	1	I2CS clock input/output pin (see Note below) Inputs SCL line status from the I ² C bus. Also outputs a low level to put the I ² C bus into clock stretch status.
#BFR	I	1	I ² C bus free request input pin A Low pulse input to this pin requests the I2CS to release the I ² C bus. When the bus free request input has been enabled with software, a Low pulse initializes the communication process of the I2CS module and sets the SDA1 and SCL1 pins into high impedance.

Note: The pins go to high impedance status when the port function is switched.

The I2CS input/output pins (SDA1, SCL1, #BFR) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as I2CS input/output pins. For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

18.3 Operation Clock

The I2CS module operates with the clock output from the external I²C master device by inputting it from the SCL1 pin.

The I2CS module also uses the peripheral module clock (PCLK) for its operations. The PCLK frequency must be set eight-times or higher than the SCL1 input clock frequency during data transfer. In standby status, use of the asynchronous address detection function allows the application to lower the PCLK clock frequency to reduce current consumption. For more information, see “Asynchronous address detection function” in Section 18.4.3.

18.4 Initializing I2CS

18.4.1 Reset

The I2CS module must be reset to initialize the communication process and to set the I²C bus into free status (high impedance). The following shows two methods for resetting the module:

(1) Software reset

The I2CS module can be reset using SOFTRESET/I2CS_CTL register.

To reset the I2CS module, write 1 to SOFTRESET to place the I2CS module into reset status, then write 0 to SOFTRESET to release it from reset status. It is not necessary to insert a waiting time between writing 1 and 0.

The I2CS module initializes the I²C communication process and put the SDA1 and SCL1 pins into high-impedance to be ready to detect a start condition. Furthermore, the I2CS control bits except for SOFTRESET are initialized. Perform the software reset in the initial setting process before starting communication.

(2) Bus free request with an input from the #BFR pin

The I2CS module can accept bus free requests via the #BFR pin. The bus free request support is disabled by default. To enable this function, set BFREQ_EN/I2CS_CTL register to 1.

When this function is enabled, a Low pulse (One peripheral module clock (PCLK) cycle or more pulse width is required. Two PCLK clock cycles or more pulse width is recommended.) input to the #BFR pin sets BFREQ/I2CS_STAT register to 1. This initializes the I²C communication process and puts the SDA1 and SCL1 pins into high-impedance. The control registers will not be initialized as distinct from the software reset described above.

Note: When BFREQ is set to 1 (an interrupt can be used for checking this status), perform a software reset and set the registers again.

18.4.2 Setting Slave Address

I²C devices have a unique slave address to identify each device.

The I2CS module supports 7-bit address (does not support 10-bit address), and the address of this module must be set to SADRS[6:0]/I2CS_SADRS register.

18.4.3 Optional Functions

The I2CS module has a clock stretch, asynchronous address detection, and noise filter optional functions selectable in the application program.

Clock stretch function

After data and ACK are transmitted or received, the slave device may issue a wait request to the master device until it is ready to transmit/receive by pulling the I²C bus SCL line down to low. The I2CS module supports this

clock stretch function.

The master device enters a standby state until the wait request is canceled (the SCL line goes high). The clock stretch function in this module is disabled by default. When using the clock stretch function, set CLKSTR_EN/I2CS_CTL register to 1 before starting data communication. Note that data setup time (between the time when MSB of SDATA[7:0] is output to I2CS_SDASDA pin and when pull-down state of I2CS_SCL pin is canceled) during clock stretching depends on the operation clock (PCLK) frequency of I²C slave module.

Asynchronous address detection function

The I2CS module operation clock (PCLK) frequency must be set eight-times or higher than the transfer rate during data transfer. However, the PCLK frequency can be lowered to reduce current consumption if no other processing is required during standby for data transfer. The asynchronous address detection function is provided to detect the I²C slave address sent from the master in this status.

The asynchronous address detection function in this module is disabled by default. When using the asynchronous address detection function, set ASDET_EN/I2CS_CTL register to 1.

If the slave address sent from the master has matched with one that has been set in this I2CS module when the asynchronous address detection function has been enabled, the I2CS module generates a bus status interrupt and returns NAK to the I²C master to request for resending the slave address.

Set the PCLK frequency to eight-times or higher than the transfer rate and reset ASDET_EN to 0 in the interrupt handler routine. Data transfer will be able to resume normally after the master retries transmission. After the master generates a stop condition to put the I²C bus into free status, the asynchronous address detection function can be enabled again to lower the operating speed.

- Notes:**
- When the asynchronous address detection function is enabled, the I²C bus signals are input without passing through the noise filter. Therefore, the slave address may not be detected in a high-noise environment.
 - When the asynchronous address detection function is enabled, data transfer cannot be performed even if the PCLK frequency is eight-times or higher than the transfer rate. Be sure to disable the asynchronous address detection function during normal operation.

Noise filter

The I2CS module includes a function to remove noise from the SDA1 and SCL1 input signals. This function is enabled by setting NF_EN/I2CS_CTL register to 1.

18.5 Data Transfer Control

Make the following settings before starting data transfers.

- (1) Initialize the I2CS module. See Section 18.4.
- (2) Set the interrupt conditions to use I2CS interrupt. See Section 18.6.

Note: Make sure that the I2CS module is disabled (I2CSEN/I2CS_CTL register = 0) before setting the conditions above.

Enabling data transfers

First, set I2CSEN/I2CS_CTL register to 1 to enable I2CS operation. This makes the I2CS in ready-to-transmit/receive status in which a start condition can be detected.

Note: Do not set the I2CSEN bit to 0 while the I2CS module is transmitting/receiving data.

Starting data transfer

To start data transmission/reception, set COM_MODE/I2CS_CTL register to 1 to enable data communications. When the slave address for this module that has been sent from the master is received after a start condition is detected, the I2CS module returns an ACK (SDA1 = low) and starts operating for data reception or data transmission according to the transfer direction bit that has been received with the slave address.

When COM_MODE is 0 (default), the I2CS module does not send back a response if the master has sent the

slave address of this module (it is regarded as that the I2CS module has returned a NAK to the master).

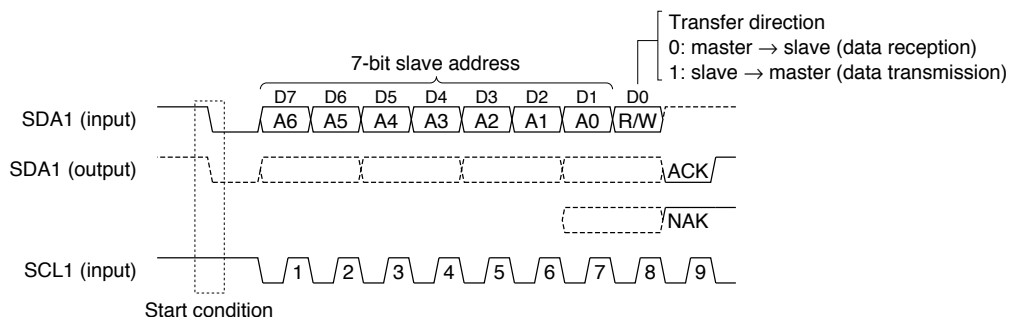


Figure 18.5.1 Receiving Slave Address and Data Direction Bit

When a start condition is detected, `BUSY/I2CS_ASTAT` register is set to 1 to indicate that the I²C bus is put into busy status. When the slave address of this module is received, `SELECTED/I2CS_ASTAT` register is set to 1 to indicate that this module has been selected as the I²C slave device. Both `BUSY` and `SELECTED` are maintained at 1 until a stop condition is detected.

The value of the transfer direction bit is set to `R/W/I2CS_ASTAT` register, so use `R/W` to select the transmit- or receive-handling.

If the slave address of this module is detected when the asynchronous address detection function has been enabled, `ASDET/I2CS_STAT` register is set to 1. The I2CS module generates a bus status interrupt and returns NAK to the I²C master to request for resending the slave address. Set the `PCLK` frequency to eight-times or higher than the transfer rate and disable the asynchronous address detection function in the interrupt handler routine. Data transfer will be able to resume normally after the master retries transmission. `ASDET` can be cleared by writing 1.

Data transmission

The following describes a data transmission procedure.

The I2CS module starts data transmission process when both `SELECTED` and `R/W` are set to 1. It sets `TXEMP/I2CS_ASTAT` register to 1 to issue a request to the application program to write transmit data. Write transmit data to `SDATA[7:0]/I2CS_TRNS` register.

When setting the first transmit data after this module has been selected as the slave device, follow the precautions described below.

When the clock stretch function is disabled (default)

Transmit data must be written to `SDATA[7:0]` within 1 cycle of the I²C clock (`SCL1` input clock) after `TXEMP` has been set to 1. This time is not enough for data preparation, so write transmit data before `TXEMP` has been set to 1. If the previous transmit data is still stored in `SDATA[7:0]`, it is overwritten with the new data to be transferred. Therefore, the clear operation (see below) using `TBUF_CLR` is unnecessary.

When the asynchronous address detection function is used, the data written before `ASDET_EN` is reset in 0 becomes invalid. Therefore, the transmission data must be written, after `TXEMP` has been set to 1.

When the clock stretch function is enabled

The master device is placed into wait status by the clock stretch function, so transmit data can be written after `TXEMP` is set. However, if the previous transmit data is still stored in `SDATA[7:0]`, it will be sent immediately after `TXEMP` has been set. In order to avoid this problem, clear the `I2CS_TRNS` register using `TBUF_CLR/I2CS_CTL` register before this module is selected as the slave device. The `I2CS_TRNS` register is cleared by writing 1 to `TBUF_CLR` then writing 0 to it.

It is not necessary to clear the `I2CS_TRNS` register if the first transmit data is written before `TXEMP` has been set.

When the asynchronous address detection function is used, the data written before `ASDET_EN` is reset in 0 becomes invalid. Therefore, the transmission data must be written, after `TXEMP` has been set to 1.

For writing transmit data other than the first time, use an interrupt that can be generated when `TXEMP` is set

to 1. TXEMP is also set to 1 when the transmit data written to SDATA[7:0] is loaded to the shift register during transmission. TXEMP is cleared by writing transmit data to SDATA[7:0].

When the clock stretch function is disabled (default)

When the clock stretch function has been disabled, data must be written to the I2CS_TRNS register within 7 cycles of the I²C clock (SCL1 input clock) from TXEMP being set to 1.

If data has not been written in this period, the current register value (previous transmit data) will be sent. In this case, TXUDF/I2CS_STAT register is set to 1 to indicate that invalid data has been sent. An interrupt can be generated when TXUDF is set to 1, so an error handling should be performed in the interrupt handler routine. TXUDF is cleared by writing 1.

When the clock stretch function is enabled

When the clock stretch function has been enabled, the I2CS module pulls down the SCL1 pin to low to generate a clock stretch (wait) status until transmit data is written to the I2CS_TRNS register.

Transmit data bits are output from the SDA1 pin in sync with the SCL1 input clock sent from the master. The MSB is output first. After the eight bits has been output, the master sends back an ACK or NAK in the ninth clock cycle.

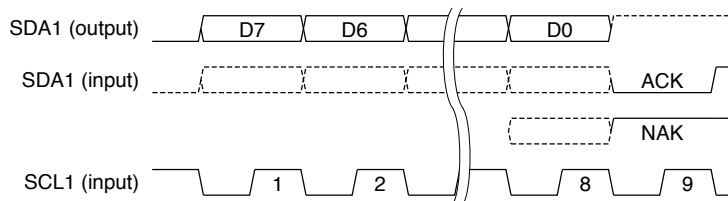


Figure 18.5.2 ACK and NAK

The ACK bit indicates that the master could receive data. It is also a transmit request bit, therefore, the next transmit data must be written in advance. Receiving an ACK generates a clock stretch status when the clock stretch function has been enabled, so data can be written after an ACK is received.

A NAK will be returned from the master if the master could not receive data or when the master terminates data reception. In this case a clock stretch status is not generated even if the clock stretch function has been enabled. Read DA_NAK/I2CS_STAT register to check if an ACK is returned or if a NAK is returned. DA_NAK is set to 0 when an ACK is returned or set to 1 when a NAK is returned. An interrupt can be generated when DA_NAK is set to 1, so an error or termination handling can be performed in the interrupt handler routine. DA_NAK is cleared by writing 1.

The SDA line status during data transmission is input in the module and is compare with the output data. The comparison results are set to DMS/I2CS_STAT register. DMS is set to 0 when data is output correctly. If the SDA line status is different from the output data, DMS is set to 1. This may be caused by a low pull-up resistor value or another device that is controlling the SDA line. An interrupt can be generated when DMS is set to 1, so an error handling can be performed in the interrupt handler routine. DMS is cleared by writing 1.

Note: If the I2CS module has sent back a NAK as the response to the address sent by the master when the conditions shown below are all met, the master must wait for 33 μ s or more before it can send another slave address (except when the master sends the I2CS slave address again).

1. The transfer rate is set to 320 kbps or higher.
2. The asynchronous address detection function is enabled.
3. The I2CS module is placed into transfer standby state and OSC1 is used as the operating clock (PCLK).

Data reception

The following describes a data receive procedure.

The I2CS module starts data receiving process when SELECTED is set to 1 and R/W is set to 0. The received data bits are input from the SDA1 pin in sync with the SCL1 input clock sent from the master. When the eight-bit data (MSB first) is received in the shift register, the received data is loaded to RDATA[7:0]/I2CS_RECV register.

When the received data is loaded to RDATA[7:0], RXRDY/I2CS_ASTAT register is set to 1 to issue a request to the application program to read RDATA[7:0]. An interrupt can be generated when RXRDY is set to 1, so the received data should be read in the interrupt handler routine. RXRDY is cleared by reading the received data.

When the clock stretch function is disabled (default)

When the clock stretch function has been disabled, data must be read from the I2CS_RECV register within 7 cycles of the I²C clock (SCL1 input clock) from RXRDY being set to 1.

When the clock stretch function is enabled

When the clock stretch function has been enabled, the I2CS module pulls down the SCL1 pin to low to generate a clock stretch (wait) status until the received data is read from the I2CS_RECV register.

If the next data has been received without reading the received data, RDATA[7:0] will be overwritten. In this case, RXOVF/I2CS_STAT register is set to 1 to indicate that the received data has been overwritten. An interrupt can be generated when RXOVF is set to 1, so an error handling should be performed in the interrupt handler routine. RXOVF is cleared by writing 1.

To return NAK during data reception

During data reception (master transmission), the I2CS module sends back an ACK (SDA1 = low) every time an 8-bit data has been received (by default setting). The response code can be changed to NAK (SDA1 = Hi-Z) by setting NAK_ANS/I2CS_CTL register. An ACK will be sent when NAK_ANS is 0 or a NAK will be sent when NAK_ANS is set to 1.

NAK_ANS should be set within 7 cycles of the I²C clock (SCL1 input clock) after RXRDY has been set to 1 by receiving data just prior to one required for returning NAK.

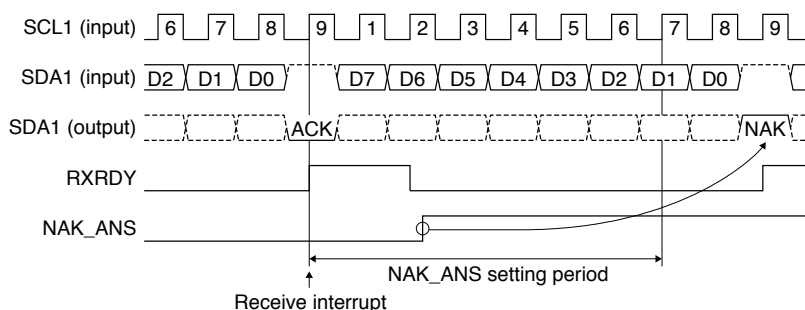


Figure 18.5.3 NAK_ANS Setting and NAK Response Timing

End of data transfer (detecting stop condition)

Data transfers will be terminated when the master generates a stop condition. The stop condition is a state in which the SDA line is pulled up from Low to High with the SCL line maintained at High.




Figure 18.5.4 Stop Condition

If a stop condition is detected while the I2CS module is selected as the slave device (SELECTED = 1), the I2CS module sets DA_STOP/I2CS_STAT register to 1. At the same time, it sets the SDA1 and SCL1 pins into high-impedance and initializes the I²C communication process to enter standby state that is ready to detect the next start condition. Also SELECTED and BUSY are reset to 0.

An interrupt can be generated when DA_STOP is set to 1, so a communication terminating process should be performed in the interrupt handler routine. DA_STOP is cleared by writing 1.

Disabling data transfer

After data transfer has finished, write 0 to the COM_MODE/I2CS_CTL register to disable data transfer.

Always make sure that BUSY and SELECTED are 0 before disabling data transfer.

To deactivate the I2CS module, set I2CSEN/I2CS_CTL register to 0.

Timing charts

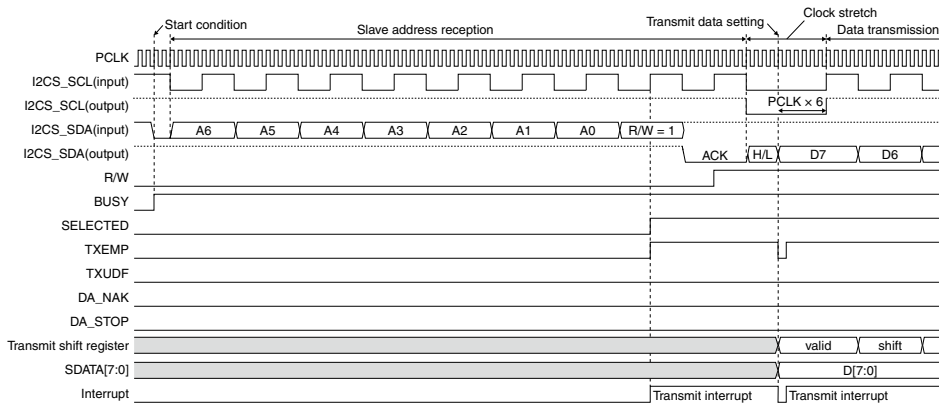


Figure 18.5.5 I2CS Timing Chart 1 (start condition → data transmission)

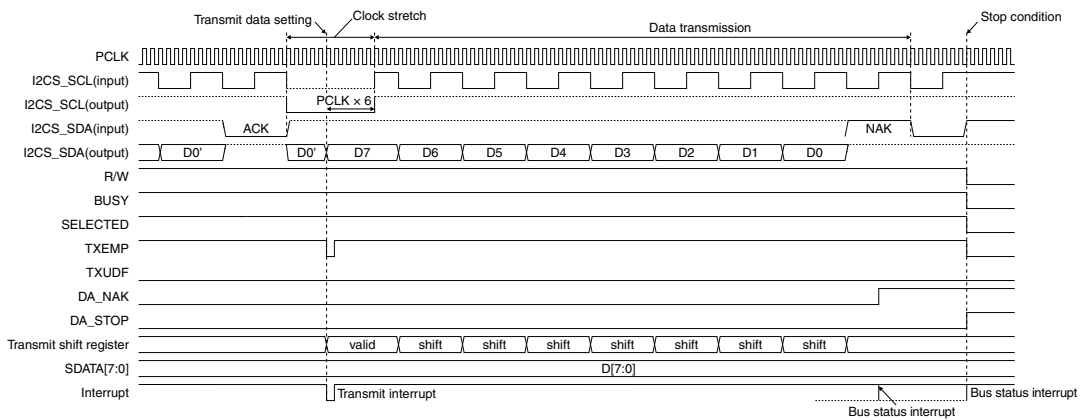


Figure 18.5.6 I2CS Timing Chart 2 (data transmission → stop condition)

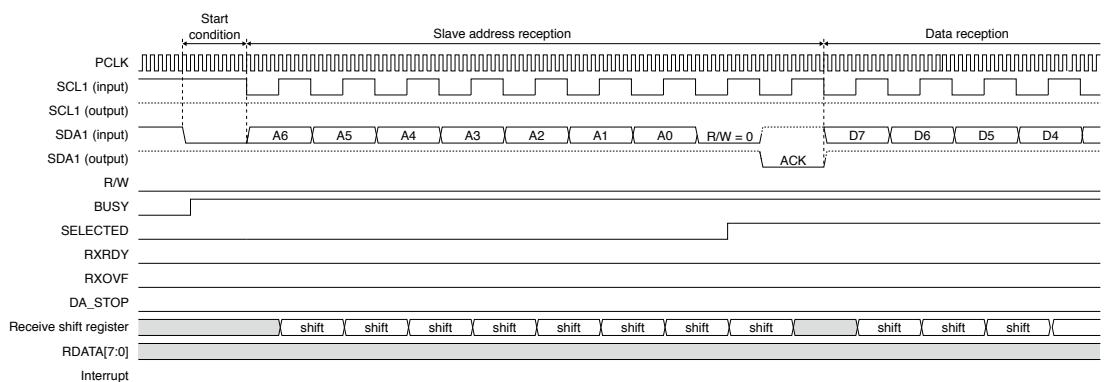


Figure 18.5.7 I2CS Timing Chart 3 (start condition → data reception)

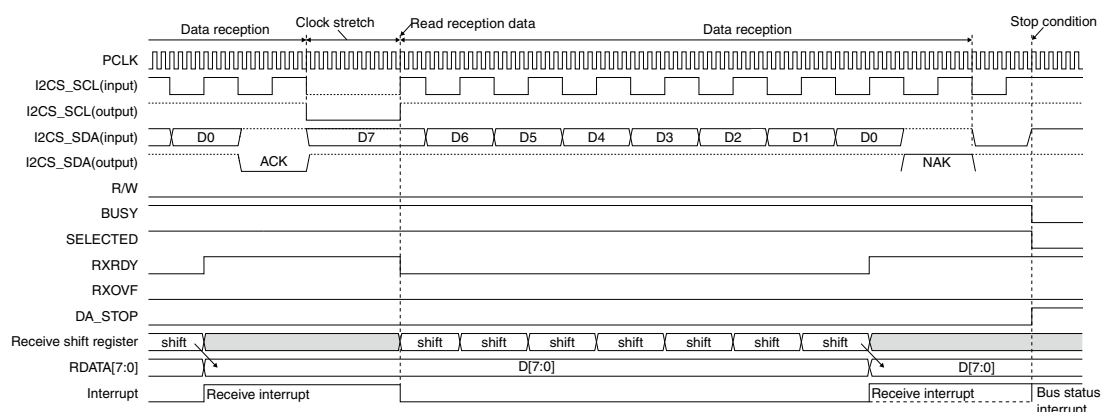


Figure 18.5.8 I2CS Timing Chart 4 (data reception → stop condition)

18.6 I2CS Interrupts

The I2CS module includes a function for generating the following three different types of interrupts.

- Transmit interrupt
- Receive interrupt
- Bus status interrupt

The I2CS module outputs one interrupt signal shared by the three above interrupt causes to the interrupt controller (ITC).

Transmit interrupt

When the transmit data written to `SDATA[7:0]/I2CS_TRNS` register is sent to the shift register, `TXEMP/I2CS_ASTAT` register is set to 1 and an interrupt signal is output to the ITC. An interrupt occurs if other interrupt conditions are satisfied. This interrupt can be used to write the next transmit data to `SDATA[7:0]`.

Set `TXEMP_IEN/I2CS_ICTL` register to 1 when using this interrupt. If `TXEMP_IEN` is set to 0 (default), interrupt requests by this cause will not be sent to the ITC.

Receive interrupt

When the received data is loaded to `RDATA[7:0]/I2CS_RECV` register, `RXRDY/I2CS_ASTAT` register is set to 1 and an interrupt signal is output to the ITC. An interrupt occurs if other interrupt conditions are satisfied. This interrupt can be used to read the received data from `RDATA[7:0]`.

Set `RXRDY_IEN/I2CS_ICTL` register to 1 when using this interrupt. If `RXRDY_IEN` is set to 0 (default), interrupt requests by this cause will not be sent to the ITC.

Bus status interrupt

The I2CS module provides the status bits listed below to represent the transmit/receive and I²C bus statuses (see Section 18.5 for details of each function).

1. `ASDET/I2CS_STAT` register: This bit is set to 1 when the slave address is detected by the asynchronous address detection function.
2. `TXUDF/I2CS_STAT` register: This bit is set to 1 when a transmit operation has started before transmit data is written. (When the clock stretch function is disabled)
3. `DA_NAK/I2CS_STAT` register: This bit is set to 1 when a NAK is returned from the master during transmission.
4. `DMS/I2CS_STAT` register: This bit is set to 1 when the SDA line status is different from transfer data. `DMS` will also be set to 1 when another slave device issues ACK to this I²C slave address (when `ASDET_IEN/I2CS_CTL` register = 0).

Note: When the master device of the I²C bus, which has multiple slave devices connected including this IC, starts communication with another slave device, the I2CS module issues NAK in response to the sent slave address. On the other hand, the selected slave device issues ACK. Therefore, DMS may be set due to a difference between the output value of this IC and the SDA line status. When SELECTED/I2CS_ASTAT register is set to 0, you can ignore DMS without a problem even if it is set to 1 as there is a difference in the response code (ACK/NAK) from the selected slave device.

When the I2CS module is placed into asynchronous address detection mode (ASDET_EN = 1), a DMS does not occur as in the condition above.

5. RXOVF/I2CS_STAT register: This bit is set to 1 when the next data has been received before the received data is read (the received data is overwritten). (When the clock stretch function is disabled)
6. BFREQ/I2CS_STAT register: This bit is set to 1 when a bus free request is accepted.
7. DA_STOP/I2CS_STAT register: This bit is set to 1 if a stop condition or a repeated start condition is detected while this module is selected as the slave device.

When one of the bits listed above is set to 1, BSTAT/I2CS_STAT register is set to 1 and an interrupt signal is output to the ITC. An interrupt occurs if other interrupt conditions are satisfied. This interrupt can be used to perform an error or terminate handling.

Set BSTAT_IEN/I2CS_ICTL register to 1 when using this interrupt. If BSTAT_IEN is set to 0 (default), interrupt requests by this cause will not be sent to the ITC.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

18.7 Control Register Details

Table 18.7.1 List of I2CS Registers

Address	Register name		Function
0x4360	I2CS_TRNS	I ² C Slave Transmit Data Register	I ² C slave transmit data
0x4362	I2CS_RECV	I ² C Slave Receive Data Register	I ² C slave receive data
0x4364	I2CS_SADRS	I ² C Slave Address Setup Register	Sets the I ² C slave address.
0x4366	I2CS_CTL	I ² C Slave Control Register	Controls the I ² C slave module.
0x4368	I2CS_STAT	I ² C Slave Status Register	Indicates the I ² C bus status.
0x436a	I2CS_ASTAT	I ² C Slave Access Status Register	Indicates the I ² C slave access status.
0x436c	I2CS_ICTL	I ² C Slave Interrupt Control Register	Controls the I ² C slave interrupt.

The I2CS module registers are described in detail below. These are 16-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

I²C Slave Transmit Data Register (I2CS_TRNS)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Slave Transmit Data Register (I2CS_TRNS)	0x4360 (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.
		D7–0	SDATA[7:0]	I ² C slave transmit data	0–0xff	0x0	R/W	

D[15:8] Reserved

D[7:0] SDATA[7:0]: I²C Slave Transmit Data Bits

Sets a transmit data in this register. (Default: 0x0)

The serial-converted data is output from the SDA1 pin beginning with the MSB, in which the bits set to 0 are output as Low-level signals. When the data set in this register is sent to the shift register, a transmit interrupt occurs. The next transmit data can be written to the register after that.

If the clock stretch function has been disabled, data must be written to this register within 7 cycles of the I²C clock (SCL1 input clock) after a transmit interrupt has been occurred.

However, when setting the first transmit data after this module has been selected as the slave device, follow the precautions described below.

When the clock stretch function is disabled (default)

Transmit data must be written to SDATA[7:0] within 1 cycle of the I²C clock (SCL1 input clock) after TXEMP has been set to 1. This time is not enough for data preparation, so write transmit data before TXEMP has been set to 1. If the previous transmit data is still stored in SDATA[7:0], it is overwritten with the new data to be transferred. Therefore, the clear operation (see below) using TBUF_CLR is unnecessary.

When the clock stretch function is enabled

The master device is placed into wait status by the clock stretch function, so transmit data can be written after TXEMP is set. However, if the previous transmit data is still stored in SDATA[7:0], it will be sent immediately after TXEMP has been set. In order to avoid this problem, clear the I2CS_TRNS register using TBUF_CLR/I2CS_CTL register before this module is selected as the slave device. The I2CS_TRNS register is cleared by writing 1 to TBUF_CLR then writing 0 to it.

It is not necessary to clear the I2CS_TRNS register if the first transmit data is written before TXEMP has been set.

I²C Slave Receive Data Register (I2CS_RECVR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Slave Receive Data Register (I2CS_RECVR)	0x4362 (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.
		D7–0	RDATA[7:0]	I ² C slave receive data	0–0xff	0x0	R	

D[15:8] Reserved

D[7:0] RDATA[7:0]: I²C Slave Receive Data Bits

The received data can be read from this register. (Default: 0x0)

The serial data input from the SDA1 pin beginning with the MSB is converted into parallel data, with the high-level signals changed to 1 and the low-level signals changed to 0. The resulting data is stored in this register.

When a receive operation is completed and the data received in the shift register is loaded to this register, RXRDY/I2CS_ASTAT register is set and a receive interrupt occurs. Thereafter, the data can be read out.

When the clock stretch function has been disabled, data must be read from this register within 7 cycles of the I²C clock (SCL1 input clock) after RXRDY is set to 1. If the next data has been received without reading the received data, this register will be overwritten with the newly received data.

I²C Slave Address Setup Register (I2CS_SADRS)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Slave Address Setup Register (I2CS_SADRS)	0x4364 (16 bits)	D15–7	–	reserved	–	–	–	0 when being read.
		D6–0	SADRS[6:0]	I ² C slave address	0–0x7f	0x0	R/W	

D[15:7] Reserved

D[6:0] SADRS[6:0]: I2CS Address Bits

Sets the slave address of the I2CS module to this register. (Default: 0x0)

I²C Slave Control Register (I2CS_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Slave Control Register (I2CS_CTL)	0x4366 (16 bits)	D15–9	–	reserved	–	–	–	0 when being read.
		D8	TBUF_CLR	I2CS_TRNS register clear	1 Clear state	0 Normal	0	R/W
		D7	I2CSEN	I ² C slave enable	1 Enable	0 Disable	0	R/W
		D6	SOFTRESET	Software reset	1 Reset	0 Cancel	0	R/W
		D5	NAK_ANS	NAK answer	1 NAK	0 ACK	0	R/W
		D4	BFREQ_EN	Bus free request enable	1 Enable	0 Disable	0	R/W
		D3	CLKSTR_EN	Clock stretch On/Off	1 On	0 Off	0	R/W
		D2	NF_EN	Noise filter On/Off	1 On	0 Off	0	R/W
		D1	ASDET_EN	Async.address detection On/Off	1 On	0 Off	0	R/W
		D0	COM_MODE	I ² C slave communication mode	1 Active	0 Standby	0	R/W

D[15:9] Reserved**D8 TBUF_CLR: I2CS_TRNS Register Clear Bit**

Clears the I2CS_TRNS register.

1 (R/W): Clear state

0 (R/W): Normal state (clear state cancellation) (default)

When TBUF_CLR is set to 1, the I2CS_TRNS register enters clear state. After that writing 0 to TBUF_CLR returns the I2CS_TRNS register to normal state. It is not necessary to insert a waiting time between writing 1 and 0.

If a new transmission is started when the I2CS_TRNS register still stores data for the previous transmission that has already finished, the data will be sent when TXEMP/I2CS_ASTAT register is set. In order to avoid this problem, clear the I2CS_TRNS register using TBUF_CLR before starting transmission (before slave selection). The clear operation is not required if transmit data is written to the I2CS_TRNS register before TXEMP is set to 1.

Data can be written to the I2CS_TRNS register even if it is placed into clear state (TBUF_CLR = 1). However, this writing does not reset TXEMP to 0. Note that TXEMP is not reset to 0 when TBUF_CLR is set back to 0. Therefore, data must be written to the I2CS_TRNS register when TBUF_CLR = 0.

D7 I2CSEN: I²C Slave Enable Bit

Enables or disables operations of the I2CS module.

1 (R/W): Enabled

0 (R/W): Disabled (default)

When I2CSEN is set to 1, the I2CS module is activated and data transfer is enabled.

When I2CSEN is set to 0, the I2CS module goes off.

D6 SOFTRESET: Software Reset Bit

Resets the I2CS module.

1 (R/W): Reset

0 (R/W): Cancel reset state (default)

To reset the I2CS module, write 1 to SOFTRESET to place the I2CS module into reset status, then write 0 to SOFTRESET to release it from reset status. It is not necessary to insert a waiting time between writing 1 and 0. The I2CS module initializes the I²C communication process and put the SDA1 and SCL1 pins into high-impedance to be ready to detect a start condition. Furthermore, the I2CS control bits except for SOFTRESET are initialized. Perform the software reset in the initial setting process before starting communication.

D5 NAK_ANS: NAK Answer Bit

Specifies the acknowledge bit to be sent after data reception.

1 (R/W): NAK

0 (R/W): ACK (default)

When an eight-bit data is received, the I2CS module sends back an ACK (SDA1 = low) or a NAK (SDA1 = Hi-Z). Either ACK or NAK should be specified using NAK_ANS within 7 cycles of the I²C clock (SCL1 input clock) after RXRDY has been set to 1 by receiving the previous data.

D4 BFREQ_EN: Bus Free Request Enable Bit

Enables or disables I²C bus free requests by inputting a low pulse to the #BFR pin.

1 (R/W): Enabled

0 (R/W): Disabled (default)

To accept I²C bus free requests, set BFREQ_EN to 1. When a bus free request is accepted, BFREQ/I2CS_STAT register is set to 1. This initializes the I²C communication process and puts the SDA1 and SCL1 pins into high-impedance. The control registers will not be initialized in this process.

When BFREQ_EN is set to 0, low pulse inputs to the #BFR pin are ignored and BFREQ is not set to 1.

D3 CLKSTR_EN: Clock Stretch On/Off Bit

Turns the clock stretch function on or off.

1 (R/W): On

0 (R/W): Off (default)

After data and ACK are transmitted or received, the slave device may issue a wait request to the master device until it is ready to transmit/receive by pulling the I²C bus SCL line down to Low. The I2CS module supports this clock stretch function. The master device enters a standby state until the wait request is canceled (the SCL line goes high). When using the clock stretch function, set CLKSTR_EN to 1 before starting data communication.

D2 NF_EN: Noise Filter On/Off Bit

Turns the noise filter on or off.

1 (R/W): On

0 (R/W): Off (default)

The I2CS module contains a function to remove noise from the SDA1 and SCL1 input signals. This function is enabled by setting NF_EN to 1.

D1 ASDET_EN: Async. Address Detection On/Off Bit

Turns the asynchronous address detection function on or off.

1 (R/W): On

0 (R/W): Off (default)

The I2CS module operation clock (PCLK) frequency must be set eight-times or higher than the transfer rate during data transfer. However, the PCLK frequency can be lowered to reduce current consumption if no other processing is required during standby for data transfer.

The asynchronous address detection function is provided to detect the I²C slave address sent from the master in this status. This function is enabled by setting ASDET_EN to 1. If the slave address sent from the master has matched with one that has been set in this I2CS module when the asynchronous address detection function has been enabled, the I2CS module generates a bus status interrupt and returns NAK to the I²C master to request for resending the slave address. Set the PCLK frequency to eight-times or higher than the transfer rate and reset ASDET_EN to 0 in the interrupt handler routine. Data transfer will be able to resume normally after the master retries transmission. After the master generates a stop condition to put the I²C bus into free status, the asynchronous address detection function can be enabled again to lower the operating speed.

- Notes:**
- When the asynchronous address detection function is enabled, the I²C bus signals are input without passing through the noise filter. Therefore, the slave address may not be detected in a high-noise environment.
 - When the asynchronous address detection function is enabled, data transfer cannot be performed even if the PCLK frequency is eight-times or higher than the transfer rate. Be sure to disable the asynchronous address detection function during normal operation.

D0 COM_MODE: I²C Slave Communication Mode Bit

Enables or disables data communication.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Set COM_MODE to 1 to enable data communication after setting I2CSEN to 1 to enable I2CS operation. When COM_MODE is 0 (default), the I2CS module does not send back a response if the master has sent the slave address of this module (it is regarded as that the I2CS module has returned a NAK to the master).

I²C Slave Status Register (I2CS_STAT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Slave Status Register (I2CS_STAT)	0x4368 (16 bits)	D15-8	--	reserved		--	--	0 when being read.
		D7	BSTAT	Bus status transition	1 Changed 0 Unchanged	0	R	
		D6	--	reserved		--	--	0 when being read.
		D5	TXUDF	Transmit data underflow	1 Occurred 0 Not occurred	0	R/W	Reset by writing 1.
			RXOVF	Receive data overflow				
		D4	BFREQ	Bus free request	1 Occurred 0 Not occurred	0	R/W	
		D3	DMS	Output data mismatch	1 Error 0 Normal	0	R/W	
		D2	ASDET	Async. address detection status	1 Detected 0 Not detected	0	R/W	
		D1	DA_NAK	NAK receive status	1 NAK 0 ACK	0	R/W	
D0	DA_STOP	STOP condition detect	1 Detected 0 Not detected	0	R/W			

D[15:8] Reserved

D7 **BSTAT: Bus Status Transition Bit**

Indicates transition of the bus status.

1 (R): Changed

0 (R): Unchanged (default)

When one of the TXUDF/RXOVF, BFREQ, DMS, ASDET, DA_NAK, and DA_STOP bits is set to 1, BSTAT is also set to 1 and an interrupt signal is output to the ITC if the interrupt is enabled with BSTAT_IEN/I2CS_ICTL register. This interrupt can be used to perform an error or terminate handling. BSTAT will be reset to 0 when the TXUDF/RXOVF, BFREQ, DMS, ASDET, DA_NAK, and DA_STOP bits are all reset to 0.

D6 Reserved

D5 **TXUDF: Transmit Data Underflow Bit (for transmission)**

RXOVF: Receive Data Overflow Bit (for reception)

Indicates the transmit/receive data register status.

1 (R/W): Data underflow/overflow has been occurred

0 (R/W): Data underflow/overflow has not been occurred (default)

This bit is effective during transmission/reception when the clock stretch function is disabled. If a data transmission begins before transmit data is written to the I2CS_TRNS register, it is regarded as a transmit data underflow and TXUDF is set to 1. If the next data reception has completed before the received data is read from the I2CS_RECV register and the I2CS_RECV register value is overwritten with the newly received data, it is regarded as a data overflow and RXOVF is set to 1.

At the same time, an interrupt signal is output to the ITC if the interrupt is enabled with BSTAT_IEN/I2CS_ICTL register. This interrupt can be used to perform an error handling.

After TXUDF/RXOVF is set to 1, it is reset to 0 by writing 1.

D4 **BFREQ: Bus Free Request Bit**

Indicates the I²C bus free request input status.

1 (R/W): Request has been issued

0 (R/W): Request has not been issued (default)

If BFREQ_EN/I2CS_CTL register has been set to 1 (bus free request enabled), a low pulse longer than five peripheral module clock (PCLK) cycles input to the #BFR pin sets BFREQ to 1 and the bus free request is accepted. When a bus free request is accepted, the I2CS module initializes the I²C communication process and puts the SDA1 and SCL1 pins into high-impedance. The control registers will not be initialized in this process.

At the same time, an interrupt signal is output to the ITC if the interrupt is enabled with BSTAT_IEN/I2CS_ICTL register. This interrupt can be used to perform an error handling.

After BFREQ is set to 1, it is reset to 0 by writing 1.

If BFREQ_EN is set to 0, low pulse inputs to the #BFR pin are ignored and BFREQ is not set to 1.

D3 DMS: Output Data Mismatch Bit

Represents the results of comparison between output data and SDA line status.

1 (R/W): Error has been occurred

0 (R/W): Error has not been occurred (default)

The I²C bus SDA line status during data transmission is input in the module and is compared with the output data. The comparison results are set to DMS. DMS is set to 0 when data is output correctly. If the SDA line status is different from the output data, DMS is set to 1. This may be caused by a low pull-up resistor value or another device that is controlling the SDA line. At the same time, an interrupt signal is output to the ITC if the interrupt is enabled with BSTAT_IEN/I2CS_IOCTL register. This interrupt can be used to perform an error handling. After DMS is set to 1, it is reset to 0 by writing 1.

Note: When the master device of the I²C bus, which has multiple slave devices connected including this IC, starts communication with another slave device, the I2CS module of this IC issues NAK in response to the sent slave address. On the other hand, the selected slave device issues ACK. Therefore, DMS may be set due to a difference between the output value of this IC and the SDA line status. When SELECTED/I2CS_ASTAT register is set to 0, you can ignore DMS without a problem even if it is set to 1 as there is a difference in the response code (ACK/NAK) from the selected slave device.

When the I2CS module is placed into asynchronous address detection mode (ASDET_EN = 1), a DMS does not occur as in the condition above.

D2 ASDET: Async. Address Detection Status Bit

Indicates the asynchronous address detection status.

1 (R/W): Detected

0 (R/W): Not detected (default)

The I2CS module operation clock (PCLK) frequency must be set eight-times or higher than the transfer rate during data transfer. However, the PCLK frequency can be lowered to reduce current consumption if no other processing is required during standby for data transfer. The asynchronous address detection function is provided to detect the I²C slave address sent from the master in this status. ASDET is set to 1 if the slave address of the I2CS module is detected when the asynchronous address detection function has been enabled by setting ASDET_EN/I2CS_CTL register.

The I2CS module returns a NAK to the I²C master to request for resending the slave address. At the same time, an interrupt signal is output to the ITC if the interrupt is enabled with BSTAT_IEN/I2CS_IOCTL register. Set the PCLK frequency to eight-times or higher than the transfer rate and reset ASDET_EN to 0 in the interrupt handler routine. Data transfer will be able to resume normally after the master retries transmission. After ASDET is set to 1, it is reset to 0 by writing 1.

D1 DA_NAK: NAK Receive Status Bit

Indicates the acknowledge bit returned from the master.

1 (R/W): NAK

0 (R/W): ACK (default)

DA_NAK is set to 0 when an ACK is returned from the master after an eight-bit data has been sent. This indicates that the master could receive data. If DA_NAK is 1, it indicates that the master could not receive data or the master terminates data reception. At the same time DA_NAK is set to 1, an interrupt signal is output to the ITC if the interrupt is enabled with BSTAT_IEN/I2CS_IOCTL register. This interrupt can be used to perform an error handling. After DA_NAK is set to 1, it is reset to 0 by writing 1.

D0 DA_STOP: Stop Condition Detect Bit

Indicates that a stop condition or a repeated start condition is detected.

1 (R/W): Detected

0 (R/W): Not detected (default)

If a stop condition or a repeated start condition is detected while the I2CS module is selected as the slave device (SELECTED/I2CS_ASTAT register = 1), the I2CS module sets DA_STOP to 1. At the same time, it initializes the I²C communication process.

When DA_STOP is set to 1, an interrupt signal is output to the ITC if the interrupt is enabled with

BSTAT_IEN/I2CS_ICTL register. This interrupt can be used to perform a terminate handling. After DA_STOP is set to 1, it is reset to 0 by writing 1.

I²C Slave Access Status Register (I2CS_ASTAT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Slave Access Status Register (I2CS_ASTAT)	0x436a (16 bits)	D15-5	–	reserved	–	–	–	0 when being read.
		D4	RXRDY	Receive data ready	1 Ready	0 Not ready	0	R
		D3	TXEMP	Transmit data empty	1 Empty	0 Not empty	0	R
		D2	BUSY	I ² C bus status	1 Busy	0 Free	0	R
		D1	SELECTED	I ² C slave select status	1 Selected	0 Not selected	0	R
		D0	R/W	Read/write direction	1 Output	0 Input	0	R

D[15:5] Reserved

D4 **RXRDY: Receive Data Ready Bit**

Indicates that the received data is ready to read.

1 (R): Received data ready

0 (R): No received data (default)

When the received data is loaded to the I2CS_RECV register, RXRDY is set to 1. At the same time, an interrupt signal is output to the ITC if the interrupt is enabled with RXRDY_IEN/I2CS_ICTL register. This interrupt can be used to read the received data from the I2CS_RECV register.

After RXRDY is set to 1, it is reset to 0 when the I2CS_RECV register is read.

D3 **TXEMP: Transmit Data Empty Bit**

Indicates that transmit data can be written.

1 (R): Transmit data empty (data can be written)

0 (R): Transmit data still stored (data cannot be written) (default)

When the transmit data written to the I2CS_TRNS register is sent, TXEMP is set to 1. At the same time, an interrupt signal is output to the ITC if the interrupt is enabled with TXEMP_IEN/I2CS_ICTL register. This interrupt can be used to write the next transmit data to the I2CS_TRNS register.

After TXEMP is set to 1, it is reset to 0 when data is written to the I2CS_TRNS register.

D2 **BUSY: I²C Bus Status Bit**

Indicates the I²C bus status.

1 (R): Bus busy status

0 (R): Bus free status (default)

When the I2CS module detects a start condition or detects that the SCL1 or SDA1 signal goes low, BUSY is set to 1 to indicate that the I²C bus enters busy status. The slave select status whether this module is selected as the slave device or not does not affect the BUSY status. After BUSY is set to 1, it is reset to 0 when a STOP condition is detected.

D1 **SELECTED: I²C Slave Select Status Bit**

Indicates that this module is selected as the I²C slave device.

1 (R): Selected

0 (R): Not selected (default)

When the slave address that is set in this module is received, SELECTED is set to 1 to indicate that this module is selected as the I²C slave device. After SELECTED is set to 1, it is reset to 0 when a stop condition or a repeated start condition is detected.

D0 **R/W: Read/Write Direction Bit**

Represents the transfer direction bit value.

1 (R): Output (master read operation)

0 (R): Input (master write operation) (default)

The transfer direction bit value that has been received with the slave address is set to R/W. Use R/W to select the transmit- or receive-handling.

I²C Slave Interrupt Control Register (I2CS_ICTL)

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks	
I ² C Slave Interrupt Control Register (I2CS_ICTL)	0x436c (16 bits)	D15–3	–	reserved	–			–	–	0 when being read.	
		D2	BSTAT_IEN	Bus status interrupt enable	1	Enable	0	Disable	0	R/W	
		D1	RXRDY_IEN	Receive interrupt enable	1	Enable	0	Disable	0	R/W	
		D0	TXEMP_IEN	Transmit interrupt enable	1	Enable	0	Disable	0	R/W	

D[15:3] Reserved

D2 **BSTAT_IEN: Bus Status Interrupt Enable Bit**

Enables or disables the bus status interrupt.

1 (R/W): Enabled

0 (R/W): Disabled (default)

When BSTAT_IEN is set to 1, I²C bus status interrupt requests to the ITC are enabled. A bus status interrupt request occurs when BSTAT/I2CS_STAT register is set to 1. (See description of BSTAT.)

When BSTAT_IEN is set to 0, a bus status interrupt will not be generated.

D1 **RXRDY_IEN: Receive Interrupt Enable Bit**

Enables or disables the I2CS receive interrupt.

1 (R/W): Enabled

0 (R/W): Disabled (default)

When RXRDY_IEN is set to 1, I2CS receive interrupt requests to the ITC are enabled. A receive interrupt request occurs when the data received in the shift register is loaded to the I2CS_RECV register (receive operation completed). When RXRDY_IEN is set to 0, a receive interrupt will not be generated.

D0 **TXEMP_IEN: Transmit Interrupt Enable Bit**

Enables or disables the I2CS transmit interrupt.

1 (R/W): Enabled

0 (R/W): Disabled (default)

When TXEMP_IEN is set to 1, I2CS transmit interrupt requests to the ITC are enabled. A transmit interrupt request occurs when the data written to the I2CS_TRNS register is transferred to the shift register. When TXEMP_IEN is set to 0, a transmit interrupt will not be generated.

19 IR Remote Controller (REMC)

19.1 REMC Module Overview

The S1C17706 includes an IR remote controller (REMC) module for transmitting/receiving infrared remote control communication signals.

The following shows the features of the REMC module:

- Supports input and output infrared remote control communication signals.
- Includes a carrier generator for generating a carrier signal.
- Includes an 8-bit down-counter for counting the transfer data length.
- Includes a modulator for generating transmission data of the specified carrier length.
- Includes an edge detector for detecting input signal rising and falling edges.
- Can generate counter underflow interrupts indicating that the specified data length has been sent and input rising/falling edge detection interrupts for data receive processing.

Figure 19.1.1 shows the configuration of the REMC module.

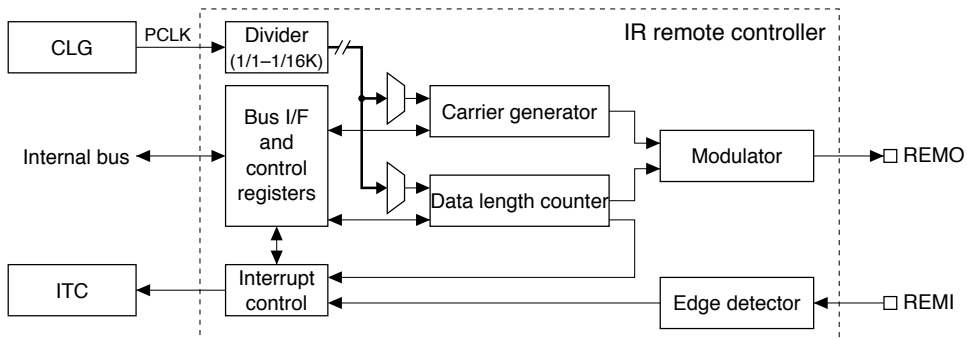


Figure 19.1.1 REMC Module Configuration

19.2 REMC Input/Output Pins

Table 19.2.1 lists the REMC input/output pins.

Table 19.2.1 List of REMC Pins

Pin name	I/O	Qty	Function
REMI	I	1	Remote control receive data input pin Inputs receive data.
REMO	O	1	Remote control transmit data output pin Outputs modulated remote control transmit data.

The REMC input/output pins (REMI, REMO) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as REMC input/output pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

19.3 Carrier Generation

The REMC module includes a carrier generator that generates a carrier signal for transmission in accordance with the clock set by software and carrier H and L section lengths.

19 IR REMOTE CONTROLLER (REMC)

The carrier generation clock is generated by dividing PCLK into 1/1 to 1/16K. The division ratio can be selected from the 15 types shown below using CGCLK[3:0]/REMC_CFG register.

Table 19.3.1 Carrier Generation Clock (PCLK Division Ratio) Selection

CGCLK[3:0]	Division ratio	CGCLK[3:0]	Division ratio
0xf	Reserved	0x7	1/128
0xe	1/16384	0x6	1/64
0xd	1/8192	0x5	1/32
0xc	1/4096	0x4	1/16
0xb	1/2048	0x3	1/8
0xa	1/1024	0x2	1/4
0x9	1/512	0x1	1/2
0x8	1/256	0x0	1/1

(Default: 0x0)

- Notes:**
- The clock generator (CLG) must be configured to supply PCLK to the peripheral modules before running the REMC.
 - Make sure the REMC is halted before setting the clock.

For detailed information on the CLG control, see the “Clock Generator (CLG)” chapter.

The carrier H and L section lengths are set by REMCH[5:0]/REMC_CAR register and REMCL[5:0]/REMC_CAR register, respectively. Set a value corresponding to the number of clock (selected as above) cycles + 1 to these registers.

The carrier H and L section lengths can be calculated as follows:

$$\text{Carrier H section length} = \frac{\text{REMCH} + 1}{\text{cg_clk}} \text{ [s]}$$

$$\text{Carrier L section length} = \frac{\text{REMCL} + 1}{\text{cg_clk}} \text{ [s]}$$

REMCH: Carrier H section length data value

REMCL: Carrier L section length data value

cg_clk: Carrier generation clock frequency

The carrier signal is generated from these settings as shown in Figure 19.3.1.

Example: CGCLK[3:0] = 0x2 (PCLK/4), REMCH[5:0] = 2, REMCL[5:0] = 1

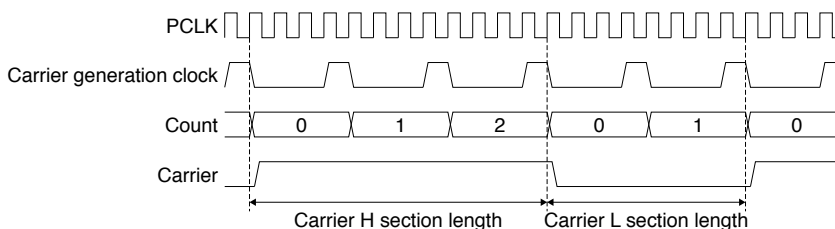


Figure 19.3.1 Carrier Signal Generation

19.4 Data Length Counter Clock Settings

The data length counter is an 8-bit counter for setting data lengths when transmitting data.

When a value corresponding to the data pulse width is written during data transmission, the data length counter begins counting down from that value and stops after generating an underflow interrupt cause when the counter reaches 0. The subsequent transmit data is set using this interrupt.

This counter is also used for data receiving, enabling measurement of the received data length. Interrupts can be generated at the input signal rising or falling edges when receiving data. The data pulse length can be obtained from the difference between data pulse edges by setting the data length counter to 0xff using the interrupt when the input changes and by reading out the count value when a subsequent interrupt occurs due to input changes.

This data length counter clock also uses a divided PCLK clock and can select one of 15 different types. The division ratio to generate the data length counter clock is selected by LCCLK[3:0]/REMC_CFG register provided separately to the carrier generation clock select bits.

Table 19.4.1 Data Length Counter Clock (PCLK Division Ratio) Selection

LCCLK[3:0]	Division ratio	LCCLK[3:0]	Division ratio
0xf	Reserved	0x7	1/128
0xe	1/16384	0x6	1/64
0xd	1/8192	0x5	1/32
0xc	1/4096	0x4	1/16
0xb	1/2048	0x3	1/8
0xa	1/1024	0x2	1/4
0x9	1/512	0x1	1/2
0x8	1/256	0x0	1/1

(Default: 0x0)

The data length counter can count up to 256. The count clock should be selected to ensure that the data length fits within this range.

19.5 Data Transfer Control

Make the following settings before starting data transfers.

- (1) Configure the carrier signal. (See Section 19.3.)
- (2) Select the data length counter clock. (See Section 19.4.)
- (3) Set the interrupt conditions. (See Section 19.6.)

Note: Make sure the REMC module is halted (REMEN/REMC_CFG register = 0) before changing the above settings.

Data transmission control

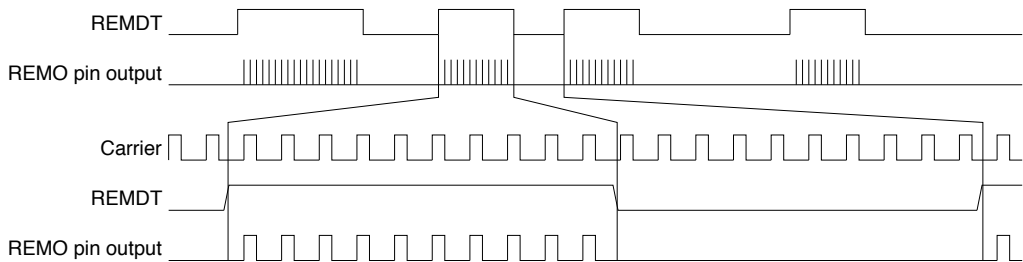


Figure 19.5.1 Data Transmission

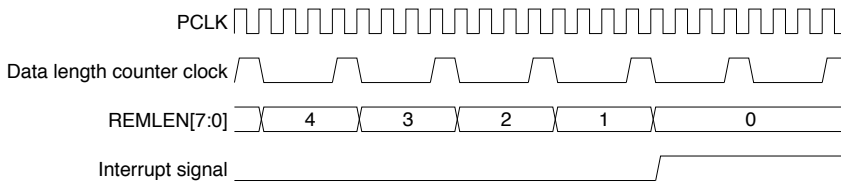


Figure 19.5.2 Underflow Interrupt Generation Timing

- (1) Data transmit mode setting
Set REMC to transmit mode by writing 0 to REMMD/REMC_CFG register.
- (2) Enabling data transmission
Enable REMC operation by setting REMEN/REMC_CFG register to 1. This initiates REMC transmission.
Set REMDT/REMC_LCNT register to 0 and REMLEN[7:0]/REMC_LCNT register to 0x0 before setting REMEN to 1 to prevent unnecessary data transmission.

19 IR REMOTE CONTROLLER (REMC)

(3) Transmission data setting

Set the data to be transmitted (High or Low) to REMDT/REMC_LCNT register.

Setting REMDT to 1 outputs High; setting it to 0 outputs Low from the REMO pin after being modulated by the carrier signal.

(4) Data pulse length setting

Set the value corresponding to the data pulse length (High or Low section) to REMLen[7:0]/REMC_LCNT register to set to the data length counter.

Given below is the value to which the data length counter is set:

$$\text{Setting value} = \text{Data pulse length (seconds)} \times \text{Data length counter clock frequency (Hz)}$$

The data length counter starts counting down from the value written using the data length counter clock selected. A cause of underflow interrupt occurs when the data length counter value reaches 0. If the interrupt is enabled, an REMC interrupt request is output to the interrupt controller (ITC). The data length counter stops counting at the same time with the counter value 0 maintained.

(5) Interrupt handling

To transmit the subsequent data, set the subsequent data (Step 3) and set the data pulse length (Step 4) in the interrupt handler routine executed by the data length counter underflow.

(6) Terminating data transmission

To terminate data transmission, set REMEN to 0 after the final data transmission has completed (after an underflow interrupt has occurred).

Data reception control

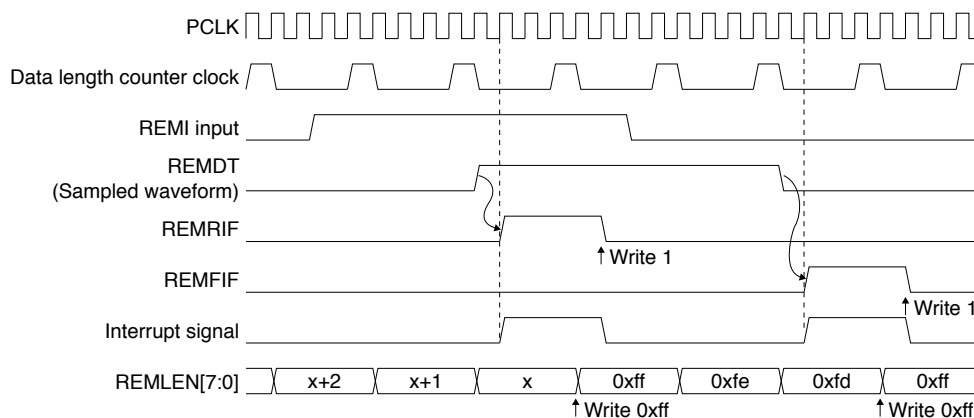


Figure 19.5.3 Data Reception

(1) Data receive mode setting

Set REMC to receive mode by writing 1 to REMMD/REMC_CFG register.

(2) Enabling data reception

Enable REMC operation by setting REMEN/REMC_CFG register to 1. This initiates REMC reception (input edge detection).

REMC detects an input transition (signal rising or falling edges) by sampling the input signal from the REMI pin using the carrier generation clock. If a signal edge is detected, a cause of rising or falling edge interrupt is generated. An REMC interrupt request is output to the ITC if the interrupt is enabled. Rising edge and falling edge interrupts can be individually enabled or disabled.

Note that if the signal level after the input has changed is not detected for at least two continuous sampling clock cycles, the input signal transition is interpreted as noise, and no rising or falling edge interrupt is generated.

(3) Interrupt handling

When a rising edge or falling edge interrupt occurs, write 0xff to REMLEN[7:0]/REMC_LCNT register in the interrupt handler routine to set the value to the data length counter.

The data length counter starts counting down using the selected data length counter clock from the value written.

The data received can be read out from REMDT/REMC_LCNT register.

The subsequent falling or rising edge interrupt is generated at the termination of the data pulse. Read the data length counter at that point. The data length can be calculated from the difference between 0xff and the value read. To receive the subsequent data, set the data length counter to 0xff once again, then wait for the subsequent interrupt.

If the data length counter becomes 0 after being set to 0xff without the occurrence of an edge interrupt, either no more data is left or a receive error has occurred. Data length counter underflow interrupts are generated even when receiving data and should be used for terminate/error handling.

(4) Terminating data reception

To terminate data reception, write 0 to REMEN after the final data has been received.

19.6 REMC Interrupts

The REMC module includes a function for generating the following three different types of interrupts.

- Underflow interrupt
- Rising edge interrupt
- Falling edge interrupt

The REMC module outputs one interrupt signal shared by the three interrupt causes above to the interrupt controller (ITC). To identify the cause of interrupt occurred, check the interrupt flag status in the REMC module.

Underflow interrupt

Generated when the data length counter has counted down to 0, this interrupt cause sets the interrupt flag REMUIF/REMC_INT register inside the REMC to 1.

When data is being transmitted, the underflow interrupt indicates that the specified data length has been transmitted. When receiving data, the underflow interrupt indicates that data has been received or a receive error has occurred.

To use this interrupt, set REMUIE/REMC_INT register to 1. If REMUIE is set to 0 (default), the interrupt request attributable to this cause will not be sent to the ITC.

When REMUIF is set to 1, REMC outputs an interrupt request to the ITC. An interrupt will be generated if the ITC and S1C17 Core interrupt conditions are met.

REMUIF should be inspected in the REMC interrupt handler routine to determine whether the REMC interrupt is attributable to data length counter underflow.

The interrupt cause should be cleared in the interrupt handler routine by resetting (writing 1 to) REMUIF.

Rising edge interrupt

Generated when the REMI pin input signal changes from Low to High, this interrupt cause sets the interrupt flag REMRIF/REMC_INT register to 1 within the REMC.

By running the data length counter between this interrupt and a falling edge interrupt when data is being received, the received data pulse width can be calculated from that count value.

To use this interrupt, set REMRIE/REMC_INT register to 1. If REMRIE is set to 0 (default), the interrupt request attributable to this cause will not be sent to the ITC.

When REMRIF is set to 1, REMC outputs an interrupt request to the ITC. An interrupt will be generated if the ITC and S1C17 Core interrupt conditions are met.

REMRIF should be inspected in the REMC interrupt handler routine to determine whether the REMC interrupt is attributable to input signal rising edge.

The interrupt cause should be cleared in the interrupt handler routine by resetting (writing 1 to) REMRIF.

Falling edge interrupt

Generated when the REMI pin input signal changes from High to Low, this interrupt cause sets the interrupt flag REMFIF/REMC_INT register to 1 within the REMC.

By running the data length counter between this interrupt and a rising edge interrupt when data is being received, the received data pulse width can be calculated from that count value.

To use this interrupt, set REMFIE/REMC_INT register to 1. If REMFIE is set to 0 (default), the interrupt request attributable to this cause will not be sent to the ITC.

When REMFIF is set to 1, REMC outputs an interrupt request to the ITC. An interrupt will be generated if the ITC and S1C17 Core interrupt conditions are met.

REMFIF should be inspected in the REMC interrupt handler routine to determine whether the REMC interrupt is attributable to input signal falling edge.

The interrupt cause should be cleared in the interrupt handler routine by resetting (writing 1 to) REMFIF.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

19.7 Control Register Details

Table 19.7.1 List of REMC Registers

Address	Register name		Function
0x5340	REMC_CFG	REMC Configuration Register	Controls the clock and data transfer.
0x5342	REMC_CAR	REMC Carrier Length Setup Register	Sets the carrier H/L section lengths.
0x5344	REMC_LCNT	REMC Length Counter Register	Sets the transmit/receive data length.
0x5346	REMC_INT	REMC Interrupt Control Register	Controls interrupts.

The REMC registers are described in detail below. These are 16-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

REMC Configuration Register (REMC_CFG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
REMC Configuration Register (REMC_CFG)	0x5340 (16 bits)	D15–12	CGCLK[3:0]	Carrier generator clock division ratio select	CGCLK[3:0] LCCLK[3:0]	Division ratio	0x0	R/W	Source clock = PCLK
					0xf	reserved			
					0xe	1/16384			
					0xd	1/8192			
					0xc	1/4096			
					0xb	1/2048			
					0xa	1/1024			
					0x9	1/512			
					0x8	1/256			
					0x7	1/128			
	D11–8	LCCLK[3:0]	Length counter clock division ratio select	0x6	1/64	0x0	R/W		
				0x5	1/32				
				0x4	1/16				
				0x3	1/8				
				0x2	1/4				
				0x1	1/2				
				0x0	1/1				
	D7–2	–	reserved	–	–	–	–	0 when being read.	
	D1	REMMD	REMC mode select	1 Receive	0 Transmit	0	R/W		
	D0	REMEN	REMC enable	1 Enable	0 Disable	0	R/W		

D[15:12] CGCLK[3:0]: Carrier Generator Clock Division Ratio Select Bits

Selects a carrier generation clock (PCLK division ratio).

Table 19.7.2 Carrier Generation Clock (PCLK Division Ratio) Selection

CGCLK[3:0]	Division ratio	CGCLK[3:0]	Division ratio
0xf	Reserved	0x7	1/128
0xe	1/16384	0x6	1/64
0xd	1/8192	0x5	1/32
0xc	1/4096	0x4	1/16
0xb	1/2048	0x3	1/8
0xa	1/1024	0x2	1/4
0x9	1/512	0x1	1/2
0x8	1/256	0x0	1/1

(Default: 0x0)

D[11:8] LCCLK[3:0]: Length Counter Clock Division Ratio Select Bits

Selects a data length counter clock (PCLK division ratio).

Table 19.7.3 Data Length Counter Clock (PCLK Division Ratio) Selection

LCCLK[3:0]	Division ratio	LCCLK[3:0]	Division ratio
0xf	Reserved	0x7	1/128
0xe	1/16384	0x6	1/64
0xd	1/8192	0x5	1/32
0xc	1/4096	0x4	1/16
0xb	1/2048	0x3	1/8
0xa	1/1024	0x2	1/4
0x9	1/512	0x1	1/2
0x8	1/256	0x0	1/1

(Default: 0x0)

Note: The clock should be set only while the REMC module is stopped (REMCN = 0).**D[7:2] Reserved****D1 REMMD: REMC Mode Select Bit**

Selects the transfer direction.

1 (R/W): Reception

0 (R/W): Transmission (default)

D0 REMEN: REMC Enable Bit

Enables or disables data transfer by the REMC module.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting REMEN to 1 starts transmission or receiving in accordance with REMMD settings.

Setting REMEN to 0 disables REMC module operations.

REMC Carrier Length Setup Register (REMC_CAR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
REMC Carrier Length Setup Register (REMC_CAR)	0x5342 (16 bits)	D15–14	–	reserved		–	–	0 when being read.
		D13–8	REMCL[5:0]	Carrier L length setup	0x0 to 0x3f	0x0	R/W	
		D7–6	–	reserved		–	–	0 when being read.
		D5–0	REMCH[5:0]	Carrier H length setup	0x0 to 0x3f	0x0	R/W	

D[15:14] Reserved

D[13:8] REMCL[5:0]: Carrier L Length Setup Bits

Sets the carrier signal L section length. (Default: 0x0)

Specify a value corresponding to the number of carrier generation clock cycles selected by CGCLK[3:0]/REMC_CFG register + 1. Calculate carrier L section length as follows:

$$\text{Carrier L section length} = \frac{\text{REMCL} + 1}{\text{cg_clk}} \text{ [s]}$$

REMCL: REMCL[5:0] setting

cg_clk: Carrier generation clock frequency

The H section length is specified by REMCH[5:0]. The carrier signal is generated from these settings as shown in Figure 19.7.1.

D[7:6] Reserved

D[5:0] REMCH[5:0]: Carrier H Length Setup Bits

Sets the carrier signal H section length. (Default: 0x0)

Specify a value corresponding to the number of carrier generation clock cycles selected by CGCLK[3:0]/REMC_CFG register + 1. Calculate carrier H section length as follows:

$$\text{Carrier H section length} = \frac{\text{REMCH} + 1}{\text{cg_clk}} \text{ [s]}$$

REMCH: REMCH[5:0] setting

cg_clk: Carrier generation clock frequency

The L section length is specified by REMCL[5:0]. The carrier signal is generated from these settings as shown in Figure 19.7.1.

Example: CGCLK[3:0] = 0x2 (PCLK/4), REMCH[5:0] = 2, REMCL[5:0] = 1

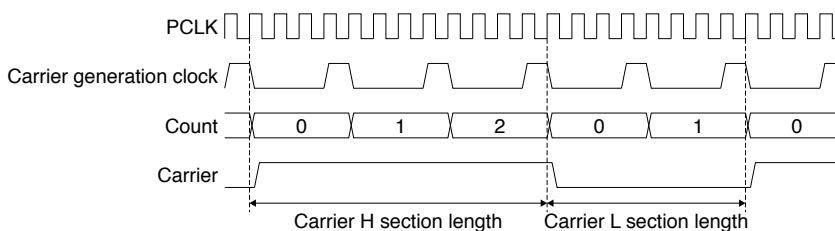


Figure 19.7.1 Carrier Signal Generation

REMC Length Counter Register (REMC_LCNT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
REMC Length Counter Register (REMC_LCNT)	0x5344 (16 bits)	D15–8	REMLEN[7:0]	Transmit/receive data length count (down counter)	0x0 to 0xff	0x0	R/W	
		D7–1	–	reserved	–	–	–	0 when being read.
		D0	REMDT	Transmit/receive data	1 1 (H) 0 0 (L)	0	R/W	

D[15:8] REMLEN[7:0]: Transmit/Receive Data Length Count Bits

Sets the data length counter value and starts counting. (Default: 0x0)

The counter stops when it reaches 0 and generates a cause of underflow interrupt.

For data transmission

Set the transmit data length for data transmission.

When a value corresponding to the data pulse width is written, the data length counter starts counting down from that value. The counter stops counting and generates a cause of underflow interrupt when it reaches 0. Set the subsequent transmit data using this interrupt.

For data receiving

Interrupts can be generated at the input signal rising or falling edges when receiving data. The data pulse length can be obtained from the difference between 0xff set to the data length counter using the interrupt when the input changes and the count value read out when the next interrupt occurs due to an input change.

D[7:1] Reserved

D0 REMDT: Transmit/Receive Data Bit

Sets the transmit data for data transmission. Receive data can be read when receiving data.

1 (R/W): 1 (H)

0 (R/W): 0 (L) (default)

If REMEN/REMC_CFG register is set to 1, the REMDT setting is modulated by the carrier signal for data transmission and output from the REMO pin. For data receiving, this bit is set to the value corresponding to the signal level of the data pulse input.

REMC Interrupt Control Register (REMC_INT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
REMC Interrupt Control Register (REMC_INT)	0x5346 (16 bits)	D15–11	–	reserved	–	–	–	0 when being read.
		D10	REMFIF	Falling edge interrupt flag	1 Cause of interrupt occurred 0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
		D9	REMRIF	Rising edge interrupt flag		0	R/W	
		D8	REMUIF	Underflow interrupt flag		0	R/W	
		D7–3	–	reserved	–	–	–	0 when being read.
		D2	REMFIE	Falling edge interrupt enable	1 Enable 0 Disable	0	R/W	
		D1	REMRIE	Rising edge interrupt enable	1 Enable 0 Disable	0	R/W	
D0	REMUIE	Underflow interrupt enable	1 Enable 0 Disable	0	R/W			

This register controls the data length counter underflow, input signal rising edge, and input signal falling edge interrupts. The interrupt flag is set to 1 when the data length counter underflows, or when an input signal rising edge or falling edge is detected. If the corresponding interrupt enable bit has been set to 1, the REMC outputs an interrupt request signal to the ITC at the same time. An interrupt will be generated if the ITC and S1C17 Core interrupt conditions are met. When an REMC interrupt occurs, check the interrupt flag status in this register to identify the cause of interrupt occurred. If the interrupt enable bit is set to 0, the interrupt is disabled.

- Notes:**
- To prevent interrupt recurrences, the REMC module interrupt flag must be reset in the interrupt handler routine after an REMC interrupt has occurred.
 - To prevent generating unnecessary interrupts, reset the interrupt flag before enabling interrupts by the interrupt enable bit.

D[15:11] Reserved

D10 REMFIF: Falling Edge Interrupt Flag Bit

Indicates the falling edge interrupt cause occurrence status.

19 IR REMOTE CONTROLLER (REMC)

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

REMFIF is set to 1 at the input signal falling edge. REMFIF is reset to 0 by writing 1.

D9 **REMRIF: Rising Edge Interrupt Flag Bit**

Indicates the rising edge interrupt cause occurrence status.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

REMRIF is set to 1 at the input signal rising edge. REMRIF is reset to 0 by writing 1.

D8 **REMUIF: Underflow Interrupt Flag Bit**

Indicates the underflow interrupt cause occurrence status.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

REMUIF is set to 1 when a data length counter underflow occurs. REMUIF is reset to 0 by writing 1.

D[7:3] **Reserved**

D2 **REMFIE: Falling Edge Interrupt Enable Bit**

Enables or disables input signal falling edge interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D1 **REMRIE: Rising Edge Interrupt Enable Bit**

Enables or disables input signal rising edge interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

D0 **REMUIE: Underflow Interrupt Enable Bit**

Enables or disables data length counter underflow interrupts.

- 1 (R/W): Interrupt enabled
- 0 (R/W): Interrupt disabled (default)

20 Sound Generator (SND)

20.1 SND Module Overview

The S1C17706 includes a sound generator (SND) for generating a buzzer signal.

The main features of the SND module are outlined below.

- Provides buzzer inverted and non-inverted output pins to directly drive a piezoelectric buzzer.
- Programmable buzzer signal frequency (eight frequencies) and volume level (eight levels)
- Duty ratio controlled digital envelope function (attenuation time is selectable from four types.)
- One-shot output function (output time is selectable from four types.)

Figure 20.1.1 shows the SND configuration.

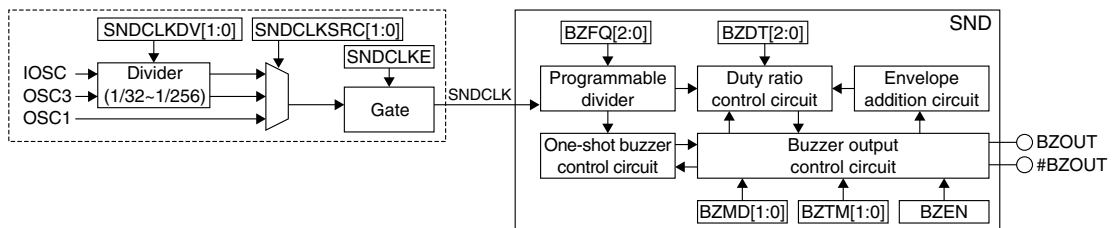


Figure 20.1.1 SND Module Configuration

20.2 SND Output Pins

Table 20.2.1 lists the SND pins.

Table 20.2.1 List of SND Pins

Pin name	I/O	Qty	Function
BZOUT	O	1	Buzzer non-inverted output pin Outputs the buzzer signal generated by the sound generator.
#BZOUT	O	1	Buzzer inverted output pin Outputs the inverted buzzer signal generated by the sound generator.

The SND module output pins (BZOUT, #BZOUT) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as SND module output pins. For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

20.3 SND Clock (SNDCLK)

Source clock selection

The clock source can be selected from IOSC, OSC3, or OSC1 using SNDCKSRC[1:0]/SND_CLK register.

Table 20.3.1 Clock Source Selection

SNDCKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x1)

Clock division ratio selection

When the clock source is OSC1

No division ratio needs to be selected when OSC1 is selected for the clock source. The OSC1 clock (typ. 32.768 kHz) is directly used as SNDCLK.

When the clock source is IOSC or OSC3

When IOSC or OSC3 is selected for the clock source, select the division ratio with the SNDCLKDV[1:0]/SND_CLK register. Set SNDCLK to become around 32 kHz.

Table 20.3.2 IOSC/OSC3 Division Ratio Selection

SNDCLKDV[1:0]	Division ratio
0x3	1/256
0x2	1/128
0x1	1/64
0x0	1/32

(Default: 0x0)

Clock enable

The SNDCLK supply is controlled with SNDCLKEN/SND_CLK register. The SNDCLKEN default setting is 0, which stops the clock supply. Stopping SNDCLKEN feeds the clock generated as above to SND. Set SNDCLKKE to 1 before executing the buzzer output. If no buzzer output is required, stop the clock supply to reduce current consumption. If SNDCLK is not supplied, the buzzer cannot output.

However, the SND registers can be accessed even if SNDCLK is stopped.

Note: This chapter shows the buzzer frequency and one-shot output time when the SNDCLK clock frequency is 32.768 kHz. If another frequency is set, the frequency and time of this chapter will differ.

20.4 Buzzer Frequency and Volume Settings

20.4.1 Buzzer Frequency

The SND module generates the buzzer signal by dividing SNDCLK. The buzzer frequency can be selected from among the eight types with different division ratios. BZFQ[2:0]/SND_BZFQ is used for this selection.

Table 20.4.1.1 Buzzer Frequency Selections

BZFQ[2:0]	Buzzer frequency (Hz)
0x7	1170.3
0x6	1365.3
0x5	1638.4
0x4	2048.0
0x3	2340.6
0x2	2730.7
0x1	3276.8
0x0	4096.0

(Default: 0x0)

20.4.2 Volume level

The buzzer volume level is controlled by changing the duty ratio of the buzzer signal.

The volume level can be selected from among eight types using BZDT[2:0]/SND_BZDT register.

Table 20.4.2.1 Volume Level Settings

Volume level	BZDT[2:0]	Duty ratio by buzzer frequency (Hz)			
		4096.0	3276.8	2730.7	2340.6
		2048.0	1638.4	1365.3	1170.3
Level 1 (Max.)	0x0	8/16	8/20	12/24	12/28
Level 2	0x1	7/16	7/20	11/24	11/28
Level 3	0x2	6/16	6/20	10/24	10/28
Level 4	0x3	5/16	5/20	9/24	9/28
Level 5	0x4	4/16	4/20	8/24	8/28
Level 6	0x5	3/16	3/20	7/24	7/28
Level 7	0x6	2/16	2/20	6/24	6/28
Level 8 (Min.)	0x7	1/16	1/20	5/24	5/28

(Default: 0x0)

Setting BZDT[2:0] to 0x0 turns the volume up to maximum level; setting it to 0x7 turns the volume down to minimum level.

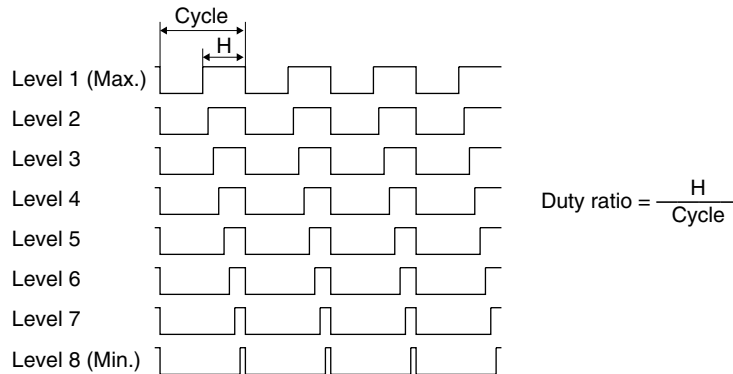


Figure 20.4.2.1 Buzzer Signal Waveforms by Different Duty Ratios

Note: BZDT[2:0] is ineffective in envelope mode, as the duty ratio is automatically controlled by the hardware.

20.5 Buzzer Mode and Output Control

20.5.1 Buzzer Mode Selection

The SND module supports three buzzer modes that allow different types of buzzer outputs.

BZMD[1:0]/SND_CTL register is used to select a buzzer mode.

Table 20.5.1.1 Buzzer Mode

BZMD[1:0]	Buzzer mode
0x3	Reserved
0x2	Envelope mode A software trigger starts buzzer output. The SND module automatically turns down the volume from Level 1 (maximum) and stops output when the volume reaches Level 8 (minimum).
0x1	One-shot mode This mode is provided for generating short buzzer sounds such as key operation sounds. The buzzer output starts by a software trigger and stops automatically after the specified time has elapsed.
0x0	Normal mode Buzzer output is turned on and off via software.

(Default: 0x0)

20.5.2 Output Control in Normal Mode

In normal mode, setting BZEN/SND_CTL register to 1 starts buzzer output and setting it to 0 stops the output. The buzzer frequency setting with BZFQ[2:0] and volume setting with BZDT[2:0] are both effective.

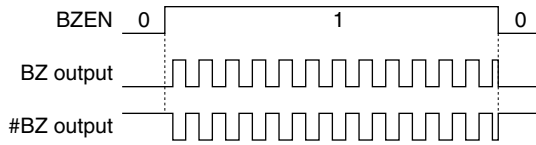


Figure 20.5.2.1 Buzzer Output in Normal Mode

Note: The buzzer signal is generated asynchronously to BZEN, so a hazard may occur when the signal is turned on or off by setting BZEN.

20.5.3 Output Control in One-shot Mode

The SND module has a one-shot output function for generating short buzzer sounds such as key operation sounds.

Output time selection

The one-shot buzzer output time can be selected from among four types shown below using BZTM[1:0]/SND_CTL register.

Table 20.5.3.1 One-shot Buzzer Output Time Selections

BZTM[1:0]	Output time
0x3	125 ms
0x2	62.5 ms
0x1	31.25 ms
0x0	15.63 ms

(Default: 0x0)

Output control

Writing 1 to BZEN/SND_CTL register starts one-shot buzzer output. When this trigger is issued, a buzzer signal is output from the buzzer output pin. When the set time has elapsed, the buzzer output stops.

BZEN functions as a status bit. It retains 1 while a one-shot buzzer signal is being output and reverts to 0 upon completion of the output.

Writing 0 to BZEN while a one-shot buzzer signal is being output stops the output immediately.

Writing 1 to BZEN again before a one-shot buzzer output is finished, a new one-shot output begins from that point.

The buzzer frequency setting with BZFQ[2:0] and volume setting with BZDT[2:0] are both effective in one-shot mode.

Figure 20.5.3.1 shows a timing chart in one-shot mode.

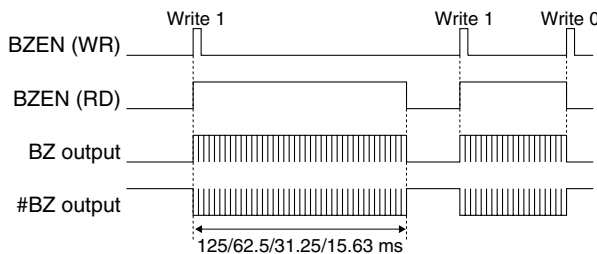


Figure 20.5.3.1 Buzzer Output in One-shot Mode

20.5.4 Output Control in Envelope Mode

In envelope mode, a digital envelope by duty control can be added to the buzzer signal. The SND module controls envelope by changing the duty ratio from Level 1 (maximum) to Level 8 (minimum) listed in Table 20.4.2.1.

Attenuation time selection

The envelope attenuation time (time to change the duty ratio) can be selected from among four types using BZTM[1:0]/SND_CTL register.

Table 20.5.4.1 Envelope Attenuation Time Selections

BZTM[1:0]	Attenuation time
0x3	125 ms
0x2	62.5 ms
0x1	31.25 ms
0x0	15.63 ms

(Default: 0x0)

Output control

Writing 1 to BZEN/SND_CTL register starts buzzer output in envelope mode. The duty ratio is set to Level 1 (maximum) at the beginning of the output and is stepped down every attenuation time selected. When attenuated down to Level 8 (minimum), the buzzer output stops.

BZEN functions as a status bit. It retains 1 while a buzzer signal is being output and reverts to 0 upon completion of the output.

Writing 0 to BZEN while a buzzer signal is being output stops the output immediately.

Writing 1 to BZEN again before a buzzer output is finished, the duty ratio returns to the maximum level and a new envelope output begins from that point.

Figure 20.5.4.1 shows a timing chart in envelope mode.

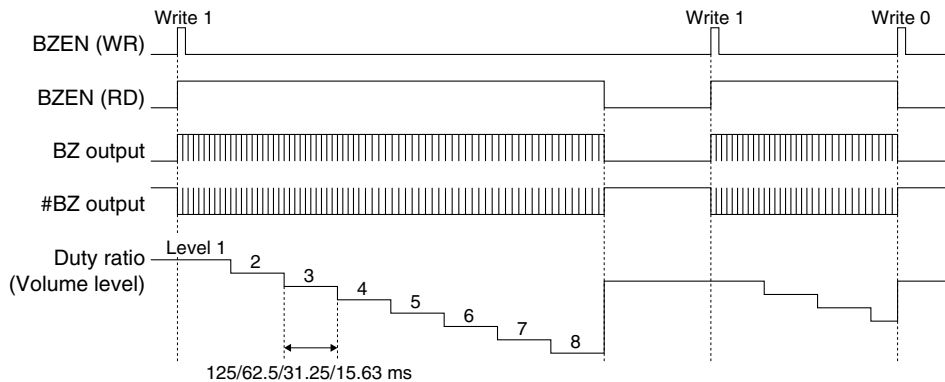


Figure 20.5.4.1 Buzzer Output in Envelope Mode

20.6 Control Register Details

Table 20.6.1 List of SND Registers

Address	Register name		Function
0x506f	SND_CLK	SND Clock Control Register	Controls the SND clock.
0x5180	SND_CTL	SND Control Register	Controls buzzer outputs.
0x5181	SND_BZFQ	Buzzer Frequency Control Register	Sets the buzzer frequency.
0x5182	SND_BZDT	Buzzer Duty Ratio Control Register	Sets the buzzer signal duty ratio.

The SND module registers are described in detail below.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

SND Clock Control Register (SND_CLK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SND Clock Control Register (SND_CLK)	0x506f (8 bits)	D7-6	–	reserved	–	–	–	0 when being read.	
		D5-4	SNDCLKDV [1:0]	SND clock division ratio select	SNDCLKDV[1:0]	Division Ratio	0x0	R/W	When the clock source is IOSC or OSC3.
					0x3	1/256			
					0x2	1/128			
					0x1	1/64			
		D3-2	SNDCLK-SRC [1:0]	SND clock source select	SNDCLKSRC	Clock source	0x1	R/W	
[1:0]	reserved								
					0x3				
					0x2				
					0x1				
					0x0				
		D1	–	reserved	–	–	–	0 when being read.	
		D0	SNDCLKEN	SND clock enable	1 Enable 0 Disable	0x0	R/W		

D[7:6] Reserved

D[5:4] SNDCLKDV[1:0]: SND Clock Division Ratio Select Bits

Select the division ratio when IOSC or OSC3 is selected as the SND clock source. This can not be modified if SNDCLKEN/SNE_CLK is not disable.

Table 20.6.2 IOSC/OSC3 Division Ratio Selection

SNDCLKDIV[1:0]	Division ratio
0x3	1/256
0x2	1/128
0x1	1/64
0x0	1/32

(Default: 0x0)

No division ratio needs to be selected if OSC1 is selected as the clock source.

D[3:2] SNDCLKSRC[1:0]: SND Clock Source Select Bits

Selects the SND clock source. This can not be modified if SNDCLKEN/SND_CLK is not disable. The oscillator selected as the clock source cannot be stopped.

Table 20.6.3 Clock Source Selection

SNDCLKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x1)

D1 Reserved

D0 SNDCLKEN: SND Clock Enable Bit

Enables or disables the SND clock supply to SND.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

The SNDCLKE default setting to the SND module is 0, which disables the clock supply. Setting SNDCLKE to 1 sends the SND clock to the SND module to enable buzzer outputs. If no buzzer output is required, stop the clock supply to reduce current consumption.

SND Control Register (SND_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SND Control Register (SND_CTL)	0x5180 (8 bits)	D7-6	–	reserved	–	–	–	0 when being read.	
		D5-4	BZTM[1:0]	Buzzer envelope time/one-shot output time select	BZTM[1:0]	Time	0x0	R/W	
					0x3	125 ms			
					0x2	62.5 ms			
					0x1	31.25 ms			
		D3-2	BZMD[1:0]	Buzzer mode select	BZMD[1:0]	Mode	0x0	R/W	
0x3	reserved								
		D1	–	reserved	–	–	–	0 when being read.	
		D0	BZEN	Buzzer output control	1 On/Trigger 0 Off	0	R/W		

D[7:6] Reserved

D[5:4] BZTM[1:0]: Buzzer Envelope Time/One-shot Output Time Select Bits

Selects an envelope attenuation time or a one-shot output time.

Table 20.6.4 Envelope Attenuation Time/One-shot Buzzer Output Time Selections

BZTM[1:0]	Attenuation time/One-shot output time
0x3	125 ms
0x2	62.5 ms
0x1	31.25 ms
0x0	15.63 ms

(Default: 0x0)

In envelope mode, an attenuation time (time to change the duty ratio) can be selected (see Figure 20.5.4.1).

In one-shot mode, a one-shot buzzer output time can be selected (see Figure 20.5.3.1).

BZTM[1:0] does not affect buzzer outputs in normal mode.

D[3:2] BZMD[1:0]: Buzzer Mode Select Bits

Selects a buzzer mode.

Table 20.6.5 Buzzer Mode

BZMD[1:0]	Buzzer mode
0x3	Reserved
0x2	Envelope mode A software trigger starts buzzer output. The SND module automatically turns down the volume from Level 1 (maximum) and stops output when the volume reaches Level 8 (minimum).
0x1	One-shot mode This mode is provided for generating short buzzer sounds such as key operation sounds. The buzzer output starts by a software trigger and stops automatically after the specified time has elapsed.
0x0	Normal mode Buzzer output is turned on and off via software.

(Default: 0x0)

D1 Reserved

D0 BZEN: Buzzer Output Control Bit

Controls buzzer output.

1 (R/W): On/Trigger

0 (R/W): Off (default)

Normal mode

1 starts buzzer output and setting it to 0 stops the output.

One-shot mode

Writing 1 to BZEN starts one-shot buzzer output. When the time set with BZTM[1:0] has elapsed, the buzzer output stops. BZEN functions as a status bit. It retains 1 while a one-shot buzzer signal is being output and reverts to 0 upon completion of the output. Writing 0 to BZEN while a one-shot

20 SOUND GENERATOR (SND)

buzzer signal is being output stops the output immediately. Writing 1 to BZEN again before a one-shot buzzer output is finished, a new one-shot output begins from that point.

Envelope mode

Writing 1 to BZEN starts buzzer output in envelope mode. The duty ratio is set to Level 1 (maximum) at the beginning of the output and is stepped down every attenuation time selected. When attenuated down to Level 8 (minimum), the buzzer output stops. BZEN functions as a status bit. It retains 1 while a buzzer signal is being output and reverts to 0 upon completion of the output. Writing 0 to BZEN while a buzzer signal is being output stops the output immediately. Writing 1 to BZEN again before a buzzer output is finished, the duty ratio returns to the maximum level and a new envelope output begins from that point.

Note: The buzzer output operates in sync with the SND_CLK register. Therefore, the BZEN register value changes in sync with the SND_CLK register.

Buzzer Frequency Control Register (SND_BZFQ)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Buzzer Frequency Control Register (SND_BZFQ)	0x5181 (8 bits)	D7-3	–	reserved	–	–	–	0 when being read.	
		D2-0	BZFQ[2:0]	Buzzer frequency select	BZFQ[2:0]	Frequency	0x0	R/W	
					0x7	1170.3 Hz			
					0x6	1365.3 Hz			
					0x5	1638.4 Hz			
					0x4	2048.0 Hz			
					0x3	2340.6 Hz			
					0x2	2730.7 Hz			
					0x1	3276.8 Hz			
			0x0	4096.0 Hz					

D[7:3] Reserved

D[2:0] BZFQ[2:0]: Buzzer Frequency Select Bits

Selects a buzzer signal frequency.

Table 20.6.6 Buzzer Frequency Selections

BZFQ[2:0]	Buzzer frequency (Hz)
0x7	1170.3
0x6	1365.3
0x5	1638.4
0x4	2048.0
0x3	2340.6
0x2	2730.7
0x1	3276.8
0x0	4096.0

(Default: 0x0)

Buzzer Duty Ratio Control Register (SND_BZDT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Buzzer Duty Ratio Control Register (SND_BZDT)	0x5182 (8 bits)	D7-3	–	reserved	–	–	–	0 when being read.	
		D2-0	BZDT[2:0]	Buzzer duty ratio select	BZDT[2:0]	Duty (volume)	0x0	R/W	
					0x7	Level 8 (Min.)			
					0x0	Level 1 (Max.)			

D[7:3] Reserved

D[2:0] BZDT[2:0]: Buzzer Duty Ratio Select Bits

Selects a duty ratio that determines the buzzer volume level.

Table 20.6.7 Volume Level Settings

Volume level	BZDT[2:0]	Duty ratio by buzzer frequency (Hz)			
		4096.0	3276.8	2730.7	2340.6
		2048.0	1638.4	1365.3	1170.3
Level 1 (Max.)	0x0	8/16	8/20	12/24	12/28
Level 2	0x1	7/16	7/20	11/24	11/28
Level 3	0x2	6/16	6/20	10/24	10/28
Level 4	0x3	5/16	5/20	9/24	9/28
Level 5	0x4	4/16	4/20	8/24	8/28
Level 6	0x5	3/16	3/20	7/24	7/28
Level 7	0x6	2/16	2/20	6/24	6/28
Level 8 (Min.)	0x7	1/16	1/20	5/24	5/28

(Default: 0x0)

Setting BZDT[2:0] to 0x0 turns the volume up to maximum level; setting it to 0x7 turns the volume down to minimum level.

Note: BZDT[2:0] is ineffective in envelope mode, as the duty ratio is automatically controlled by the hardware.

21 LCD Driver (LCD32A)

21.1 LCD Module Overview

The S1C17706 includes a dot-matrix LCD driver capable of driving an LCD panel with up to 5,120 pixels (160 segments \times 32 commons). The LCD driver also supports 1/32 duty 64-COM emulation mode that enables a pseudo 64 \times 64-pixel display. The main features of the LCD driver are listed below.

- Operating voltage V_{DD} = 1.8 to 2.5 V (driven with the V_{D2} voltage)
V_{DD} = 2.5 to 3.6 V (driven with the V_{DD} voltage)
LCD drive voltages are internally generated.
- Number of SEG and COM outputs Max. 160-SEG \times 32/24/16-COM
- Drive bias 1/5 bias (fixed)
- Display RAM Display data: 960 bytes / Gray-scale data: 960 bytes
- Frame frequency configuration Adjustable with a four-bit counter
- LCD display mode Normal display mode
All on mode
All off mode
Inverted display mode
4-level gray-scale display
- COM and SEG pins Supports two COM pin layouts: Both ends and Center.
Supports inverting memory bit assignment to the COM and SEG pins.
Supports COM outputs partial drive function.
Supports SEG outputs n-line AC reverse drive function.
- 1/32 duty 64-COM emulation mode Supports two panel configurations.
- LCD contrast adjustment Selectable from among 16 values
- Other functions LFR signal output, frame interrupt

Figure 21.1.1 shows the LCD driver and drive power supply configuration.

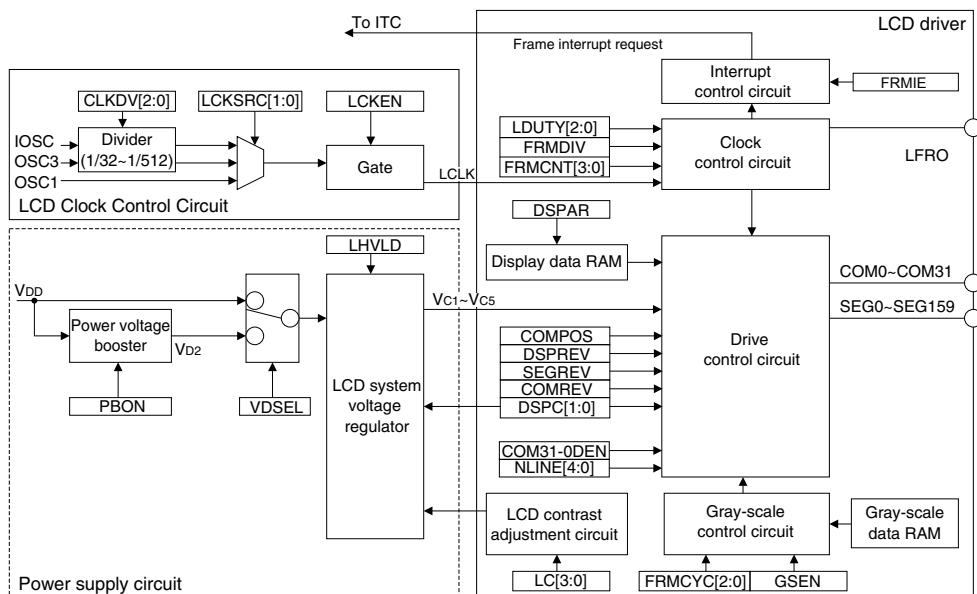


Figure 21.1.1 LCD Driver and Driver Power Supply Configuration

21.2 LCD SEG/COM Pins

S1C17706 has 160 SEG (segment output) pins and 32 COM (common output) pins. The S1C17706 provides COM-POS/LCD_DCTL register to allow switching of the LCD pin assignment on the package.

Table 21.2.1 LCD Pin Assignment

Pad/pin No.		COMPOS = 0 (Default)	COMPOS = 1	Pad/pin No.		COMPOS = 0 (Default)	COMPOS = 1
Chip	QFP			Chip	QFP		
1	1	SEG64	COM16	58	49	SEG112	SEG96
2	2	SEG65	COM17	60	50	SEG113	SEG97
3	3	SEG66	COM18	61	51	SEG114	SEG98
4	4	SEG67	COM19	62	52	SEG115	SEG99
5	5	SEG68	COM20	63	53	SEG116	SEG100
6	6	SEG69	COM21	64	54	SEG117	SEG101
7	7	SEG70	COM22	66	55	SEG118	SEG102
8	8	SEG71	COM23	67	56	SEG119	SEG103
9	9	SEG72	COM24	68	57	SEG120	SEG104
10	10	SEG73	COM25	69	58	SEG121	SEG105
12	11	SEG74	COM26	70	59	SEG122	SEG106
13	12	SEG75	COM27	71	60	SEG123	SEG107
14	13	SEG76	COM28	72	61	SEG124	SEG108
15	14	SEG77	COM29	73	62	SEG125	SEG109
16	15	SEG78	COM30	74	63	SEG126	SEG110
17	16	SEG79	COM31	75	64	SEG127	SEG111
18	17	SEG80	SEG64	76	65	SEG128	SEG112
19	18	SEG81	SEG65	77	66	SEG129	SEG113
20	19	SEG82	SEG66	78	67	SEG130	SEG114
21	20	SEG83	SEG67	79	68	SEG131	SEG115
23	21	SEG84	SEG68	80	69	SEG132	SEG116
24	22	SEG85	SEG69	81	70	SEG133	SEG117
25	23	SEG86	SEG70	82	71	SEG134	SEG118
26	24	SEG87	SEG71	83	72	SEG135	SEG119
28	25	SEG88	SEG72	84	73	SEG136	SEG120
29	26	SEG89	SEG73	85	74	SEG137	SEG121
30	27	SEG90	SEG74	87	75	SEG138	SEG122
31	28	SEG91	SEG75	88	76	SEG139	SEG123
33	29	SEG92	SEG76	89	77	SEG140	SEG124
34	30	SEG93	SEG77	90	78	SEG141	SEG125
35	31	SEG94	SEG78	91	79	SEG142	SEG126
37	32	SEG95	SEG79	92	80	SEG143	SEG127
38	33	SEG96	SEG80	94	81	SEG144	SEG128
40	34	SEG97	SEG81	95	82	SEG145	SEG129
41	35	SEG98	SEG82	96	83	SEG146	SEG130
42	36	SEG99	SEG83	97	84	SEG147	SEG131
44	37	SEG100	SEG84	99	85	SEG148	SEG132
45	38	SEG101	SEG85	100	86	SEG149	SEG133
46	39	SEG102	SEG86	101	87	SEG150	SEG134
47	40	SEG103	SEG87	103	88	SEG151	SEG135
49	41	SEG104	SEG88	104	89	SEG152	SEG136
50	42	SEG105	SEG89	105	90	SEG153	SEG137
51	43	SEG106	SEG90	107	91	SEG154	SEG138
52	44	SEG107	SEG91	108	92	SEG155	SEG139
54	45	SEG108	SEG92	109	93	SEG156	SEG140
55	46	SEG109	SEG93	111	94	SEG157	SEG141
56	47	SEG110	SEG94	112	95	SEG158	SEG142
57	48	SEG111	SEG95	113	96	SEG159	SEG143

Pad/pin No.		COMPOS = 0 (Default)	COMPOS = 1	Pad/pin No.		COMPOS = 0 (Default)	COMPOS = 1
Chip	QFP			Chip	QFP		
115	97	COM31	SEG144	244	209	SEG16	SEG32
116	98	COM30	SEG145	245	210	SEG17	SEG33
118	99	COM29	SEG146	246	211	SEG18	SEG34
119	100	COM28	SEG147	248	212	SEG19	SEG35
120	101	COM27	SEG148	249	213	SEG20	SEG36
122	102	COM26	SEG149	250	214	SEG21	SEG37
123	103	COM25	SEG150	251	215	SEG22	SEG38
124	104	COM24	SEG151	253	216	SEG23	SEG39
125	105	COM23	SEG152	254	217	SEG24	SEG40
126	106	COM22	SEG153	255	218	SEG25	SEG41
128	107	COM21	SEG154	256	219	SEG26	SEG42
129	108	COM20	SEG155	258	220	SEG27	SEG43
130	109	COM19	SEG156	259	221	SEG28	SEG44
131	110	COM18	SEG157	260	222	SEG29	SEG45
132	111	COM17	SEG158	261	223	SEG30	SEG46
133	112	COM16	SEG159	263	224	SEG31	SEG47
210	177	COM0	SEG0	264	225	SEG32	SEG48
211	178	COM1	SEG1	265	226	SEG33	SEG49
212	179	COM2	SEG2	266	227	SEG34	SEG50
213	180	COM3	SEG3	268	228	SEG35	SEG51
214	181	COM4	SEG4	269	229	SEG36	SEG52
215	182	COM5	SEG5	270	230	SEG37	SEG53
216	183	COM6	SEG6	271	231	SEG38	SEG54
217	184	COM7	SEG7	273	232	SEG39	SEG55
218	185	COM8	SEG8	274	233	SEG40	SEG56
219	186	COM9	SEG9	275	234	SEG41	SEG57
220	187	COM10	SEG10	276	235	SEG42	SEG58
221	188	COM11	SEG11	278	236	SEG43	SEG59
222	189	COM12	SEG12	279	237	SEG44	SEG60
223	190	COM13	SEG13	280	238	SEG45	SEG61
224	191	COM14	SEG14	281	239	SEG46	SEG62
225	192	COM15	SEG15	282	240	SEG47	SEG63
226	193	SEG0	SEG16	284	241	SEG48	COM0
227	194	SEG1	SEG17	285	242	SEG49	COM1
228	195	SEG2	SEG18	286	243	SEG50	COM2
229	196	SEG3	SEG19	287	244	SEG51	COM3
230	197	SEG4	SEG20	288	245	SEG52	COM4
231	198	SEG5	SEG21	290	246	SEG53	COM5
232	199	SEG6	SEG22	291	247	SEG54	COM6
233	200	SEG7	SEG23	292	248	SEG55	COM7
234	201	SEG8	SEG24	293	249	SEG56	COM8
235	202	SEG9	SEG25	294	250	SEG57	COM9
236	203	SEG10	SEG26	295	251	SEG58	COM10
238	204	SEG11	SEG27	296	252	SEG59	COM11
239	205	SEG12	SEG28	297	253	SEG60	COM12
240	206	SEG13	SEG29	298	254	SEG61	COM13
241	207	SEG14	SEG30	299	255	SEG62	COM14
243	208	SEG15	SEG31	300	256	SEG63	COM15

For detailed pin configuration diagrams, see the “Pins” section in Chapter 1.

In addition to this switching, the S1C17706 also allows software to inverse the display memory bit assignment for the SEG/COM pins. For more information, see Section 21.6.

21.3 LCD Power Supply

The LCD drive voltages V_{C1} to V_{C5} are generated by the on-chip LCD voltage regulator and power supply voltage booster. No external power supply is needed. For more information on the LCD power supply, see the “Power Supply” chapter.

21.4 LCD Clock

Figure 21.4.1 shows the LCD clock supply system.

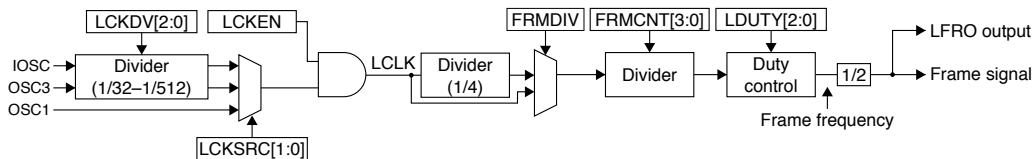


Figure 21.4.1 LCD Clock System

21.4.1 LCD Operating Clock (LCLK)

Clock source selection

Use LCKSRC[1:0]/LCD_CLK register to select the clock source from IOSC, OSC3, and OSC1.

Table 21.4.1.1 Clock Source Selection

LCKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x1)

Clock division ratio selection

When the clock source is OSC1

No division ratio needs to be selected when OSC1 is selected for the clock source. The OSC1 clock (typ. 32.768 kHz) is directly used as LCLK.

When the clock source is IOSC or OSC3

When IOSC or OSC3 is selected for the clock source, use LCKDV[2:0]/LCD_CLK register to select the division ratio. Set LCLK to become around 32 kHz.

Table 21.4.1.2 IOSC/OSC3 Division Ratio Selection

LCKDV[2:0]	Division ratio
0x7-0x5	Reserved
0x4	1/512
0x3	1/256
0x2	1/128
0x1	1/64
0x0	1/32

(Default: 0x0)

Clock enable

The LCLK supply is enabled with LCKEN/LCD_CLK register. The LCKEN default setting is 0, which stops the clock. Setting LCKEN to 1 feeds the clock generated as above to the LCD driver.

Notes: After DSPC[1:0]/LCD_DCTL register was setting to 0, if LCKEN/LCD_CLK register is setting to 0 then it is necessary to wait for 1 LCLK or more. Or if it was stopped without waiting for 1 LCLK or more and LCKEN/LCD_CLK register is setting was 1 again, then set DSPC[1:0]/LCD_DCTL register to 1 after waiting for 1 LCLK or more.

If no LCD display is required, stop the clock to reduce current consumption.

If LCLK is not supplied, the LCD cannot display. However, the LCD driver control registers and display memory can be accessed even if LCLK is stopped.

Notes: After DSPC[1:0]/LCD_DCTL register was setting to 0, if LCKEN/LCD_CLK register is setting to 0 then it is necessary to wait for 1 LCLK or more. Or if it was stopped without waiting for 1 LCLK or more and LCKEN/LCD_CLK register is setting was 1 again, then set DSPC[1:0]/LCD_DCTL register to 1 after waiting for 1 LCLK or more.

21.4.2 Frame Signal

The LCD driver frame frequency can be divided into 32 types of ratios for each drive duty. The division ratio can be set using the FRMDIV/LCD_CCTL and FRMCNT[3:0]/LCD_CCTL registers. The frame frequency is calculated by the equation shown below.

$$\text{Frame frequency [Hz]} = f_{\text{LCLK}} \times \text{FRMDIV} \times \frac{1}{(\text{FRMCNT} + 1)} \times \text{LCD drive duty}$$

f_{LCLK} : LCLK frequency [Hz]

FRMDIV: 1/4 or 1/1

FRMCNT: FRMCNT[3:0] setting (0 to 15)

LCD drive duty: 1/32, 1/24 or 1/16

Table 21.4.2.1 lists an example of frame frequency settings when LCLK = 32768 Hz.

Table 21.4.2.1 Frame Frequency Settings (when LCLK = 32768 Hz)

FRMDIV	FRMCNT[3:0]	Frame frequency [Hz]		
		1/32 duty	1/24 duty	1/16 duty
1/4	15	16.0	21.3	32.0
	14	17.1	22.8	34.1
	13	18.3	24.4	36.6
	12	19.7	26.3	39.4
	11	21.3	28.4	42.7
	10	23.3	31.0	46.5
	9	25.6	34.1	51.2
	8	28.4	37.9	56.9
	7	32.0	42.7	64.0
	6	36.6	48.8	73.1
	5	42.7	56.9	85.3
	4	51.2	68.3	102.4
	3	64.0	85.3	128.0
	2	85.3	113.8	170.7
	1	128.0	170.7	256.0
	0	256.0	341.3	512.0
1/1	15	64.0	85.3	128.0
	14	68.3	91.0	136.5
	13	73.1	97.5	146.3
	12	78.8	105.0	157.5
	11	85.3	113.8	170.7
	10	93.1	124.1	186.2
	9	102.4	136.5	204.8
	8	113.8	151.7	227.6
	7	128.0	170.7	256.0
	6	146.3	195.0	292.6
	5	170.7	227.6	341.3
	4	204.8	273.1	409.6
	3	256.0	341.3	512.0
	2	341.3	455.1	682.7
	1	512.0	682.7	1024.0
	0	1024.0	1365.3	2048.0

The LFR signal generated can be output to an external device via the LFRO pin. The output pin must be switched for LFRO output using the port function select bit, as the pin is configured for an I/O port by default. For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

21.5 LCD Drive Control

21.5.1 Drive Duty Switching

Drive duty can be switched between 1/32, 1/24, and 1/16 using LDUTY[2:0]/LCD_CCTL register. Table 21.5.1.1 shows the correspondence between LDUTY[2:0] settings, drive duty, and maximum number of display pixels.

Table 21.5.1.1 Drive Duty Settings

LDUTY[2:0]	Duty	Valid common pins	Valid segment pins	Max. number of display pixels
0x7–0x6	Reserved	–	–	–
0x5	1/32 (Type B)*	COM0 to COM31	SEG0 to SEG159	5,120 pixels
0x4	1/32 (Type A)*	COM0 to COM31	SEG0 to SEG159	5,120 pixels
0x3	1/24	COM0 to COM23	SEG0 to SEG159	3,840 pixels
0x2	1/32	COM0 to COM31	SEG0 to SEG159	5,120 pixels
0x1	1/16	COM0 to COM15	SEG0 to SEG159	2,560 pixels
0x0	Reserved	–	–	–

* 64-COM emulation mode (See Section 21.5.3.)

(Default: 0x2)

The drive bias is fixed at 1/5 (five potentials Vc1, Vc2, Vc3, Vc4, Vc5) for all duty settings.

21.5.2 Drive Waveform

Figures 21.5.2.1 to 21.5.2.3 shows the drive waveforms according to the duty selections.

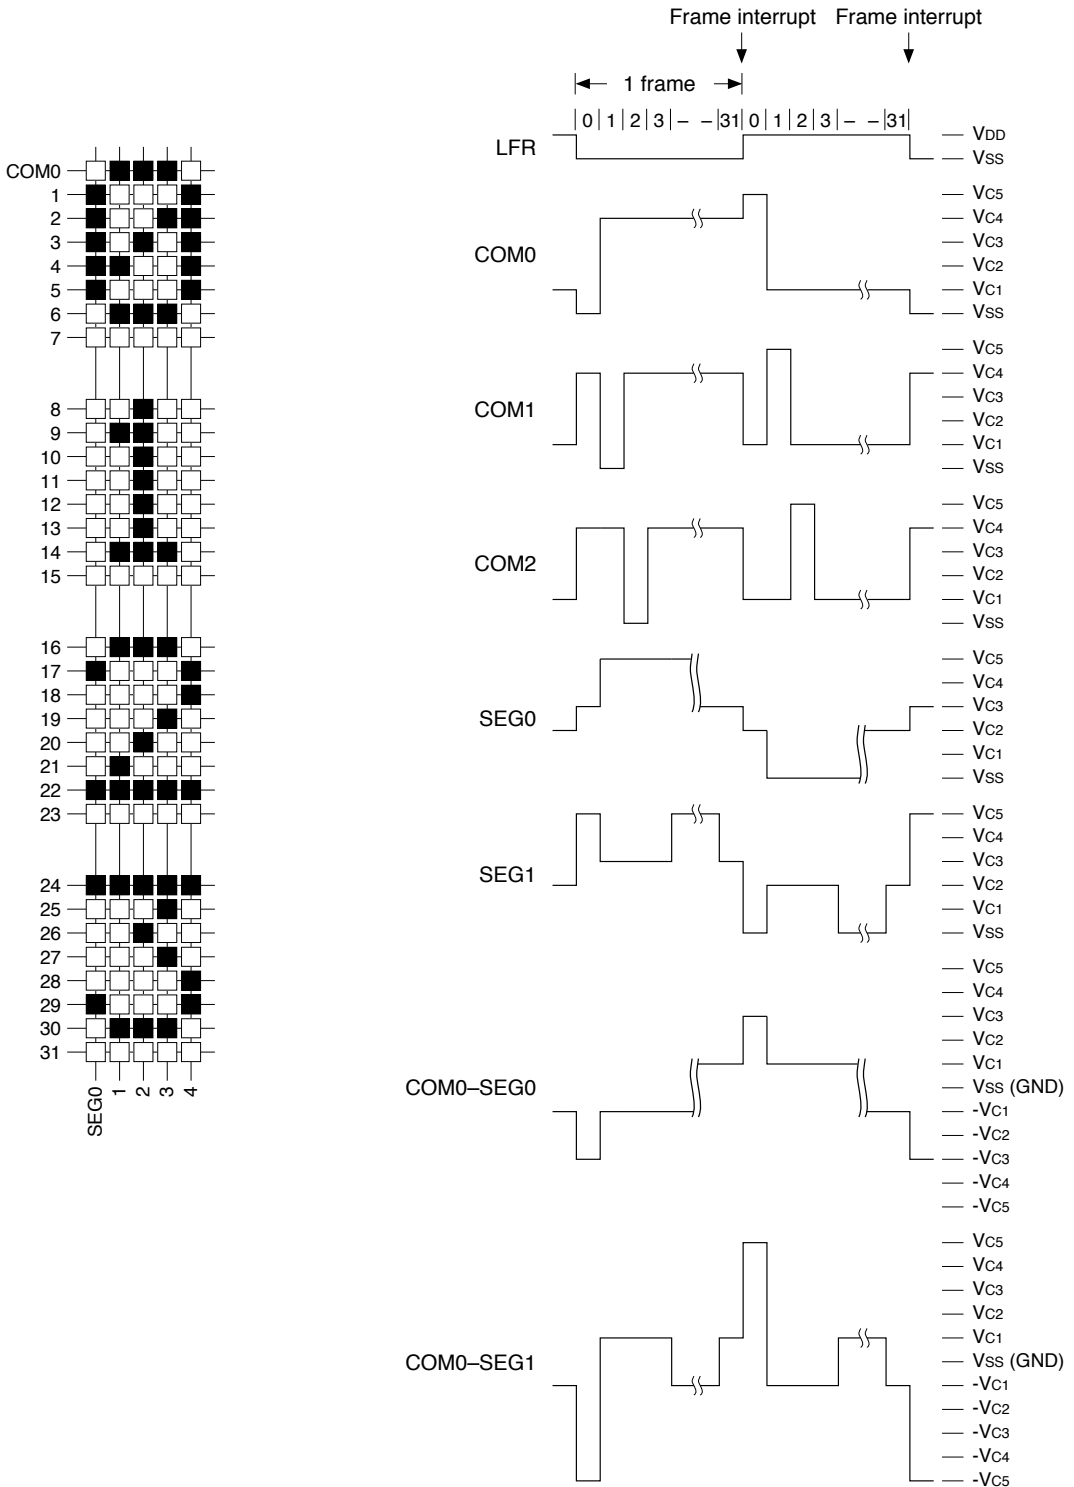


Figure 21.5.2.1 1/32 Duty Drive Waveform

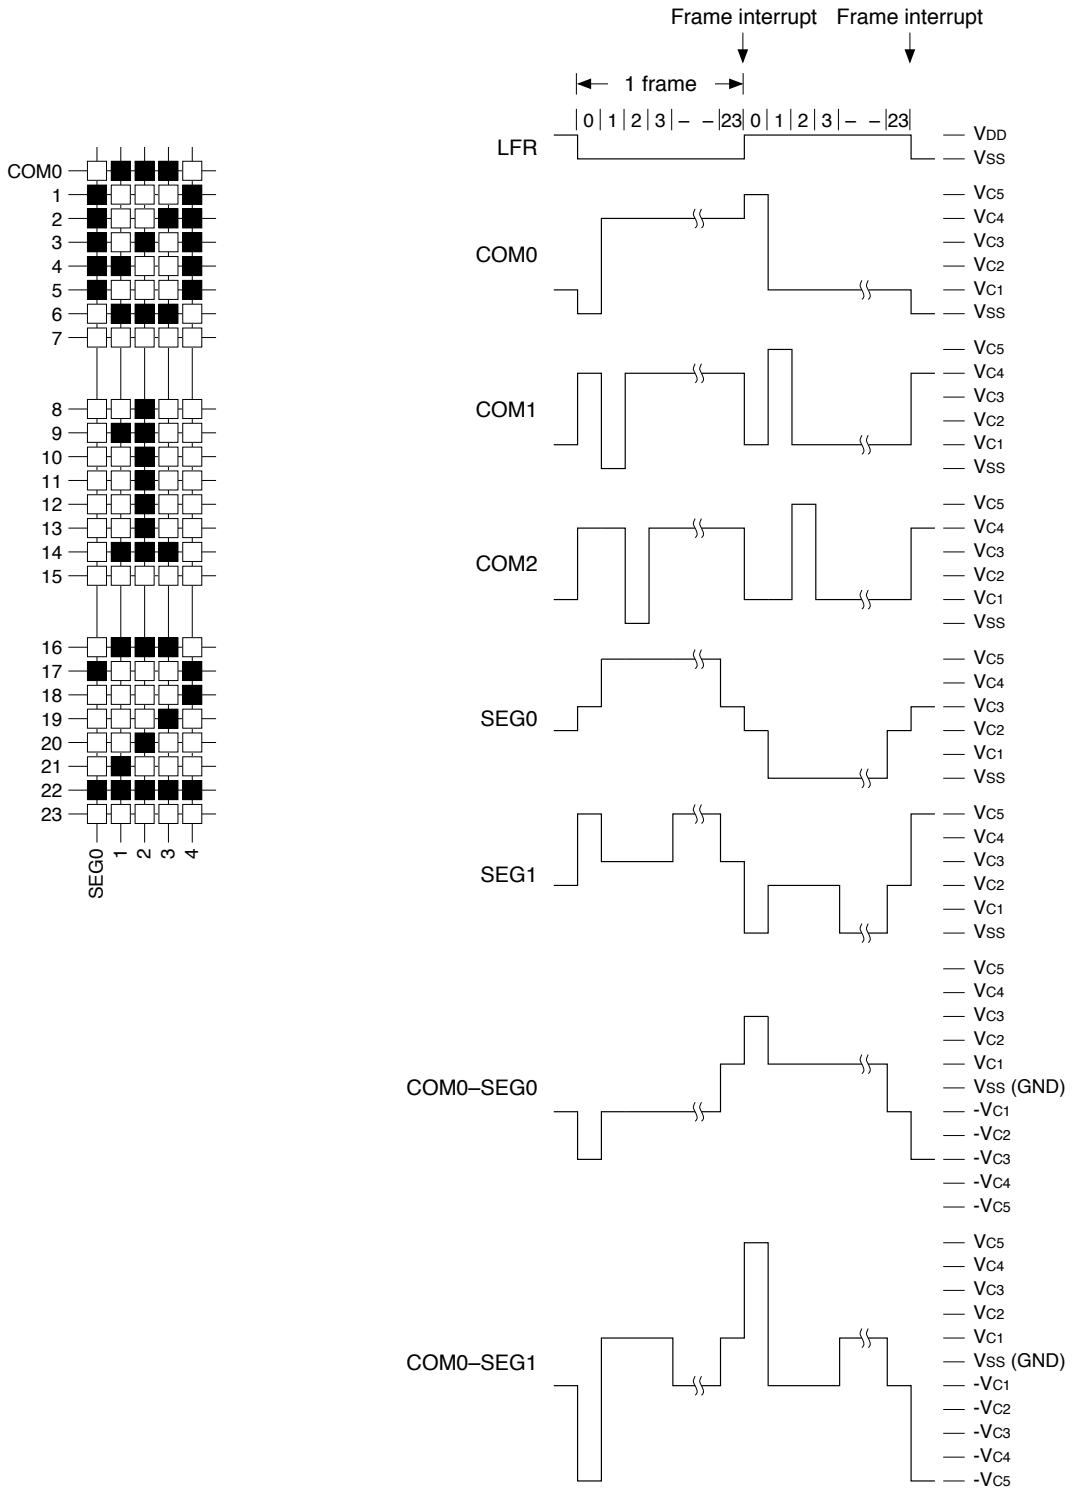


Figure 21.5.2.2 1/24 Duty Drive Waveform


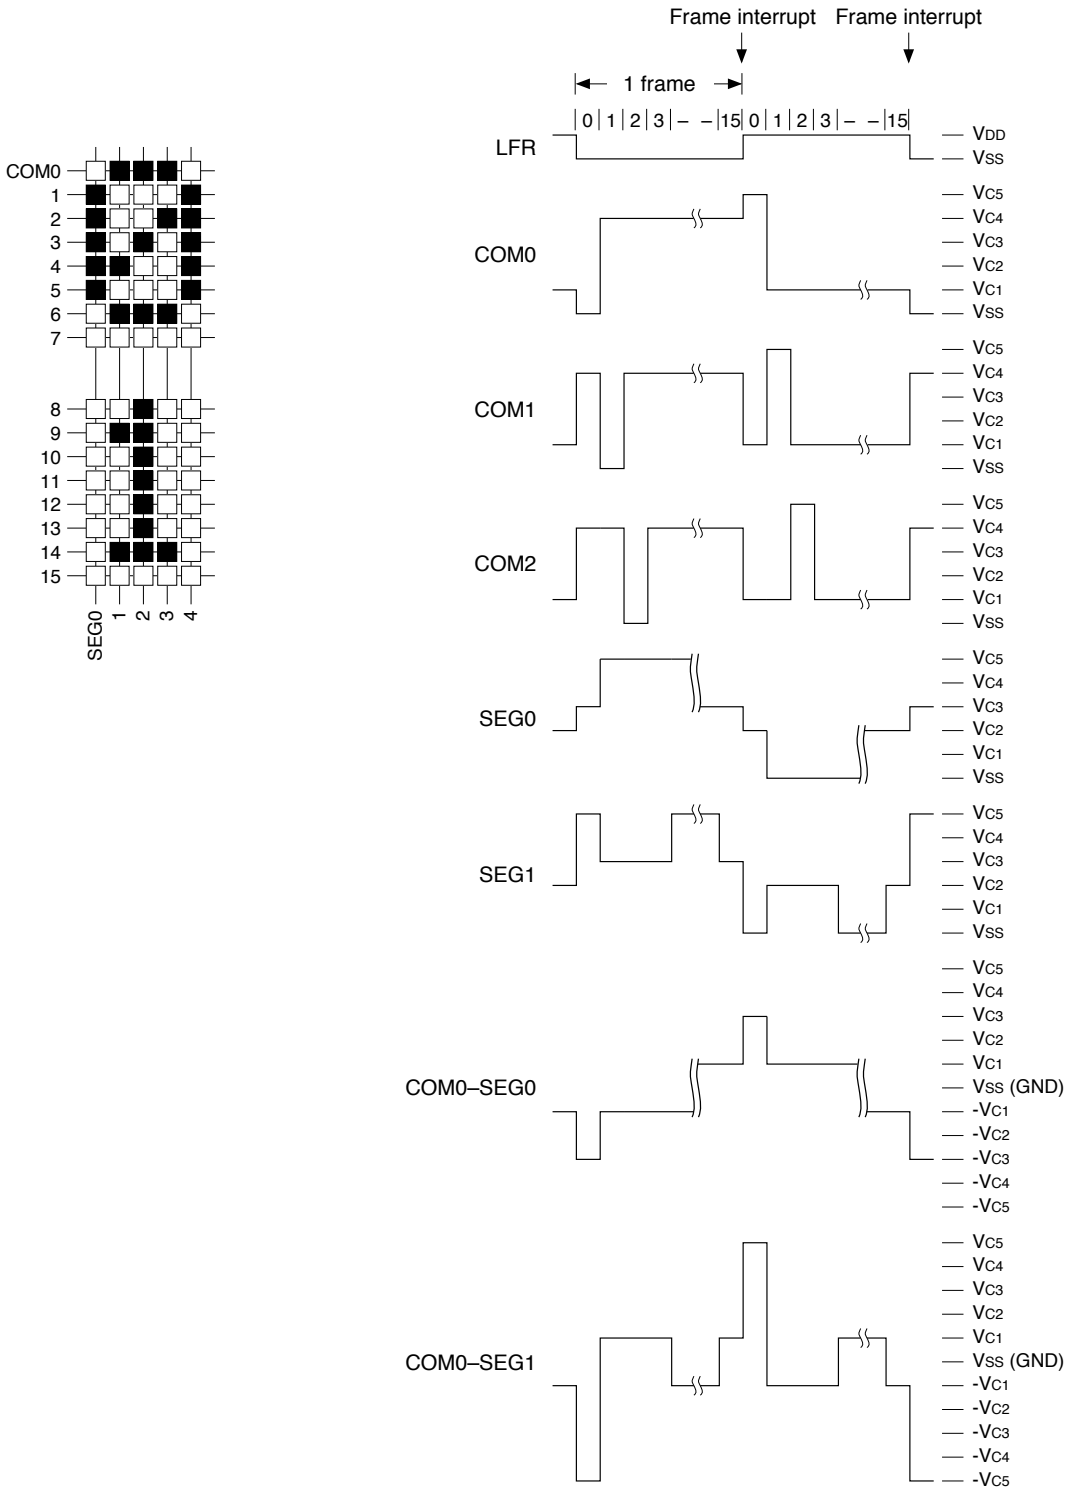



Figure 21.5.2.3 1/16 Duty Drive Waveform

21.5.3 64-COM Emulation Mode


The LCD driver is capable of driving a pseudo-64-COM panel that consists of two 64-SEG (max.) × 32-COM display areas. Figure 21.5.3.1 shows examples of connection between an LCD panel that can be used in 64-COM emulation mode and the IC.

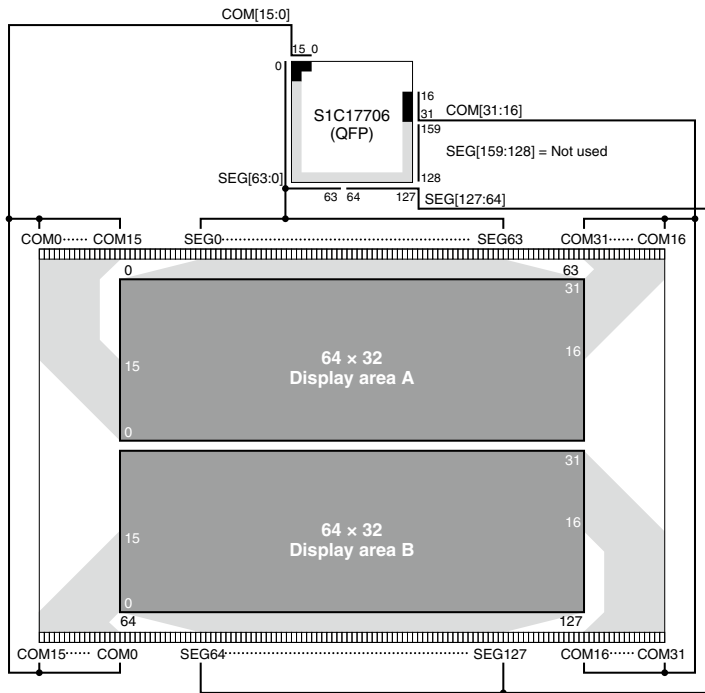

Example 1: COMPOS = 0, COMREV = 0, SEGREV = 1, LDUTY[2:0] = 0x2 (normal 1/32 duty)

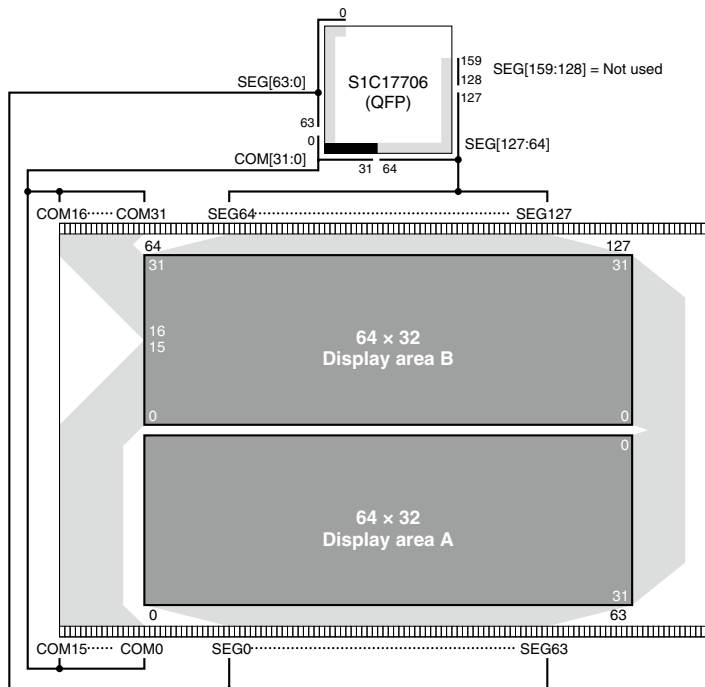

Example 2: COMPOS = 1, COMREV = 0, SEGREV = 1, LDUTY[2:0] = 0x4 (1/32 duty, Type A)

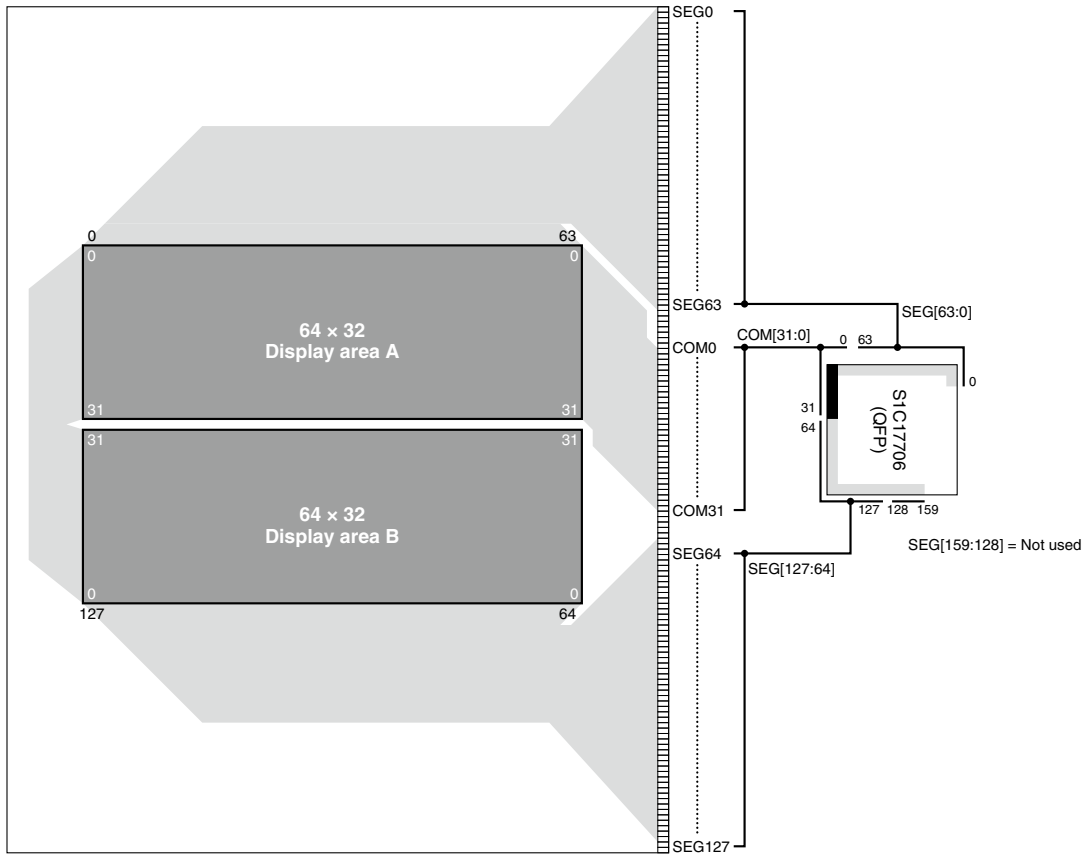

Example 3: COMPOS = 1, COMREV = 1, SEGREV = 1, LDUTY[2:0] = 0x5 (1/32 duty, Type B)

Figure 21.5.3.1 Pseudo-64-COM Panel Connection Examples

21.5.4 COM Outputs Partial Drive

If the COM*DEN/LCD_COMC0-3 register is set to 1, any COM output can be output as the OFF waveforms (turn-off waveforms) regardless of the display data RAM. This can limit the number of required display positions and reduce power consumption.

21.5.5 SEG Outputs n-line AC Reverse Drive

If the display quality down is occurred by the crosstalk or other factors, it can be improved by activating the n-line AC reverse drive function (However, current consumption is increased). The best function setting should be determined through actual system evaluation.

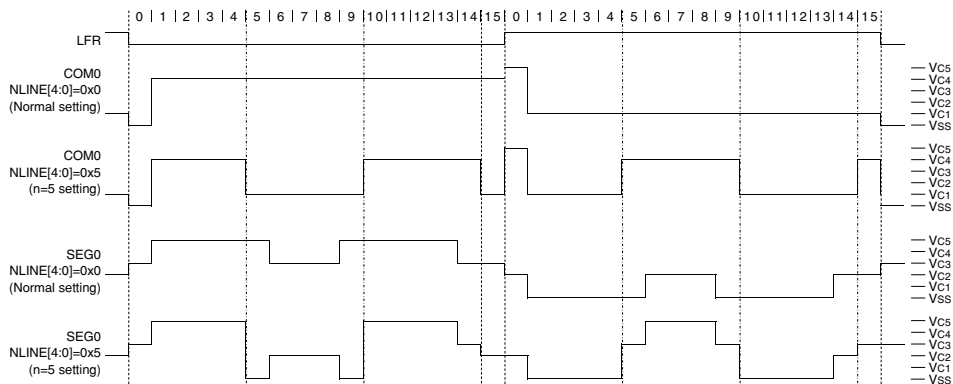


Figure 21.5.5.1 Normal and n=5 Setting Drive Waveform of 1/16 Duty

21.6 Display RAM

The S1C17706 includes two display RAMs: 960 bytes of display data RAM and 960 bytes of gray-scale data RAM. The display data RAM is assigned to addresses 0x4800 to 0x4dff. The gray-scale data RAM is assigned to addresses 0x7800 to 0x7dff. The correspondence between memory bits and common/segment pins varies depending on the conditions selected, as follows.

- (1) Drive duty: 1/32 (normal, Type A, Type B), 1/24 or 1/16 duty
- (2) SEG pin assignment: normal or inverted
- (3) COM pin assignment: normal or inverted

Figures 21.6.2 to 21.6.6 show the correspondence between display memory and common/segment pins for each drive duty.

Normal display mode and gray-scale display mode

If the GSEN/LCD_CADJ register is set to 0, the normal display mode is selected. If the display RAM bit that corresponds to a dot on the LCD panel is set to 1, this dot turns On. If the bit is set to 0, this dot turns Off.

If the GSEN/LCD_CADJ register is set to 1, the Gray-Scale Display mode is selected. Any of 4-level gray-scale data can be set by a combination of display RAM data corresponding to each dot on the LCD panel and the gray-scale RAM data.





Normal display mode (GSEN/LCD_CADJ register = 0)	Gray-scale display mode (GSEN/LCD_CADJ register = 1)	LCD panel display
(Display data RAM bit, Gray-scale data RAM bit)	(Display data RAM bit, Gray-scale data RAM bit)	
(0,*)	(0,0)	 1/4-level gray-scale (Off)
	(0,1)	 2/4-level gray-scale (1/3 densities of On)
	(1,1)	 3/4-level gray-scale (2/3 densities of On)
(1,*)	(1,0)	 4/4-level gray-scale (On)

Figure 21.6.1 Gray-Scale Data Settings

Note: The GSEN/LCD_CAJ register must be set to 1, and the FRMCYC/LCD_CADJ register must be set for gray-scale display. For details, see Section 21.7.4 “Gray-Scale Display.”

As the display RAM is enabled to write and read data, each data bit can be controlled by logical and other (read-modify-write) instructions.

If some bits of display RAM are not assigned to the display area, they are write- and read-enabled and can be used as general-purpose RAM. While in the normal display mode, the gray-scale RAM can also be used as write- and read-enabled, general-purpose RAM.

Display area selection (with 1/24 or 1/16 duty selected)

When 1/24 or 1/16 duty is selected as the drive duty, two screen areas can be reserved within the display memory, and DSPAR/LCD_DCTL register can be used to switch between the screens. Setting DSPAR to 0 selects display area 0; setting to 1 selects display area 1.

SEG pin assignment

The display RAM address assignment for the SEG pins can be inverted using SEGREV/LCD_DCTL register. When SEGREV is set to 1 (default), memory addresses are assigned to SEG pins in ascending order. When SEGREV is set to 0, memory addresses are assigned to SEG pins in descending order (except for 1/32 duty Type B). (See Figures 21.6.2 to 21.6.6.)

COM pin assignment

The display RAM bit assignment for the COM pins can be inverted using COMREV/LCD_DCTL register. When COMREV is set to 1 (default), memory bits are assigned to COM pins in ascending order. When COM-

REV is set to 0, memory bits are assigned to COM pins in descending order (except for 1/32 duty Type A and B).
(See Figures 21.6.2 to 21.6.6.)

Address	Bit	Address (lower 8 bits)																COMREV = 1	COMREV = 0									
		0x00	...	0x11	0x20	...	0x3f	0x40	...	0x5f	0x60	...	0x7f	0x80	...	0x9f	0xa0			...	0xff							
Display data RAM	0x48**	D0	Display area A								Display area B								Display area C								COM0	COM31
		D1																									COM1	COM30
		D2																									COM2	COM29
		D3																									COM3	COM28
		D4																									COM4	COM27
		D5																									COM5	COM26
		D6																									COM6	COM25
		D7																									COM7	COM24
		D0	Display area A								Display area B								Display area C								COM8	COM23
		D1																									COM9	COM22
		D2																									COM10	COM21
		D3																									COM11	COM20
		D4																									COM12	COM19
		D5																									COM13	COM18
		D6																									COM14	COM17
		D7																									COM15	COM16
		D0	Display area A								Display area B								Display area C								COM16	COM15
		D1																									COM17	COM14
		D2																									COM18	COM13
		D3																									COM19	COM12
		D4																									COM20	COM11
		D5																									COM21	COM10
		D6																									COM22	COM9
		D7																									COM23	COM8
		D0	Display area A								Display area B								Display area C								COM24	COM7
		D1																									COM25	COM6
		D2																									COM26	COM5
		D3																									COM27	COM4
	D4																									COM28	COM3	
	D5																									COM29	COM2	
	D6																									COM30	COM1	
	D7																									COM31	COM0	
Gray-scale data RAM	0x78**	D0	Display area A								Display area B								Display area C								COM0	COM31
		D1																									COM1	COM30
		D2																									COM2	COM29
		D3																									COM3	COM28
		D4																									COM4	COM27
		D5																									COM5	COM26
		D6																									COM6	COM25
		D7																									COM7	COM24
		D0	Display area A								Display area B								Display area C								COM8	COM23
		D1																									COM9	COM22
		D2																									COM10	COM21
		D3																									COM11	COM20
		D4																									COM12	COM19
		D5																									COM13	COM18
		D6																									COM14	COM17
		D7																									COM15	COM16
		D0	Display area A								Display area B								Display area C								COM16	COM15
		D1																									COM17	COM14
		D2																									COM18	COM13
		D3																									COM19	COM12
		D4																									COM20	COM11
		D5																									COM21	COM10
		D6																									COM22	COM9
		D7																									COM23	COM8
		D0	Display area A								Display area B								Display area C								COM24	COM7
		D1																									COM25	COM6
		D2																									COM26	COM5
		D3																									COM27	COM4
	D4																									COM28	COM3	
	D5																									COM29	COM2	
	D6																									COM30	COM1	
	D7																									COM31	COM0	
	D0	Unused area (general-purpose memory)																										
	D1																											
	D2																											
	D3																											
	D4																											
	D5																											
	D6																											
	D7																											
	D0	Unused area (general-purpose memory)																										
	D1																											
	D2																											
	D3																											
	D4																											
	D5																											
	D6																											
	D7																											
SEGREV = 1	SEG0	...	SEG31	SEG32	...	SEG63	SEG64	...	SEG95	SEG96	...	SEG127	SEG128	...	SEG159													
SEGREV = 0	SEG159	...	SEG128	SEG127	...	SEG96	SEG95	...	SEG64	SEG63	...	SEG32	SEG31	...	SEG0													

Figure 21.6.2 Display Data RAM and Gray-Scale Data RAM Map (with normal 1/32 duty selected)

21 LCD DRIVER (LCD32A)

Address	Bit	Address (lower 8 bits)				COMREV =1	COMREV =0	Address (lower 8 bits)				COMREV =1	COMREV =0											
		0x00	...	0x1f 0x20	...			0x3f	0x40	...	0x5f 0x60			...	0x7f 0x80	...	0x9f 0xa0	...	0xff					
Display data RAM	0x48**	D0	Display area A				COM0	COM31	Display area B				Display area C				COM31	COM0						
		D1					COM1	COM30									COM30	COM1						
		D2					COM2	COM29									COM29	COM2						
		D3					COM3	COM28									COM28	COM3						
		D4					COM4	COM27									COM27	COM4						
		D5					COM5	COM26									COM26	COM5						
		D6					COM6	COM25									COM25	COM6						
	D7	COM7	COM24	COM24	COM7																			
	0x49**	D0	Display area A				COM8	COM23	Display area B				Display area C				COM23	COM8						
		D1					COM9	COM22									COM22	COM9						
		D2					COM10	COM21									COM21	COM10						
		D3					COM11	COM20									COM20	COM11						
		D4					COM12	COM19									COM19	COM12						
		D5					COM13	COM18									COM18	COM13						
		D6					COM14	COM17									COM17	COM14						
	D7	COM15	COM16	COM16	COM15																			
0x4a**	D0	Display area A				COM16	COM15	Display area B				Display area C				COM15	COM16							
	D1					COM17	COM14									COM14	COM17							
	D2					COM18	COM13									COM13	COM18							
	D3					COM19	COM12									COM12	COM19							
	D4					COM20	COM11									COM11	COM20							
	D5					COM21	COM10									COM10	COM21							
	D6					COM22	COM9									COM9	COM22							
D7	COM23	COM8	COM8	COM23																				
0x4b**	D0	Display area A				COM24	COM7	Display area B				Display area C				COM7	COM24							
	D1					COM25	COM6									COM6	COM25							
	D2					COM26	COM5									COM5	COM26							
	D3					COM27	COM4									COM4	COM27							
	D4					COM28	COM3									COM3	COM28							
	D5					COM29	COM2									COM2	COM29							
	D6					COM30	COM1									COM1	COM30							
D7	COM31	COM0	COM0	COM31																				
0x4c**	D0	Unused area (general-purpose memory)				Unused area (general-purpose memory)				Unavailable area				COM0	COM31									
	D1																							
	D2																							
	D3																							
	D4																							
	D5																							
	D6																							
D7																								
0x4d**	D0	Unused area (general-purpose memory)				Unused area (general-purpose memory)				Unavailable area				COM0	COM31									
	D1																							
	D2																							
	D3																							
	D4																							
	D5																							
	D6																							
D7																								
Gray-scale data RAM	0x78**	D0	Display area A				COM0	COM31	Display area B				Display area C				COM31	COM0						
		D1					COM1	COM30									COM30	COM1						
		D2					COM2	COM29									COM29	COM2						
		D3					COM3	COM28									COM28	COM3						
		D4					COM4	COM27									COM27	COM4						
		D5					COM5	COM26									COM26	COM5						
		D6					COM6	COM25									COM25	COM6						
	D7	COM7	COM24	COM24	COM7																			
	0x79**	D0	Display area A				COM8	COM23	Display area B				Display area C				COM23	COM8						
		D1					COM9	COM22									COM22	COM9						
		D2					COM10	COM21									COM21	COM10						
		D3					COM11	COM20									COM20	COM11						
		D4					COM12	COM19									COM19	COM12						
		D5					COM13	COM18									COM18	COM13						
		D6					COM14	COM17									COM17	COM14						
	D7	COM15	COM16	COM16	COM15																			
0x7a**	D0	Display area A				COM16	COM15	Display area B				Display area C				COM15	COM16							
	D1					COM17	COM14									COM14	COM17							
	D2					COM18	COM13									COM13	COM18							
	D3					COM19	COM12									COM12	COM19							
	D4					COM20	COM11									COM11	COM20							
	D5					COM21	COM10									COM10	COM21							
	D6					COM22	COM9									COM9	COM22							
D7	COM23	COM8	COM8	COM23																				
0x7b**	D0	Display area A				COM24	COM7	Display area B				Display area C				COM7	COM24							
	D1					COM25	COM6									COM6	COM25							
	D2					COM26	COM5									COM5	COM26							
	D3					COM27	COM4									COM4	COM27							
	D4					COM28	COM3									COM3	COM28							
	D5					COM29	COM2									COM2	COM29							
	D6					COM30	COM1									COM1	COM30							
D7	COM31	COM0	COM0	COM31																				
0x7c**	D0	Unused area (general-purpose memory)				Unused area (general-purpose memory)				Unavailable area				COM0	COM31									
	D1																							
	D2																							
	D3																							
	D4																							
	D5																							
	D6																							
D7																								
0x7d**	D0	Unused area (general-purpose memory)				Unused area (general-purpose memory)				Unavailable area				COM0	COM31									
	D1																							
	D2																							
	D3																							
	D4																							
	D5																							
	D6																							
D7																								
SEGREV=1		SEG0	...	SEG31	SEG32	...	SEG63	SEG64		...	SEG95	SEG96	...	SEG127	SEG128	...	SEG159							
SEGREV=0		SEG127	...	SEG96	SEG95	...	SEG64	SEG63		...	SEG32	SEG31	...	SEG0	SEG128	...	SEG159							

Figure 21.6.3 Display Data RAM and Gray-Scale Data RAM Map (with 1/32 duty Type A selected)

Address	Bit	Address (lower 8 bits)				COMREV =1	COMREV =0	Address (lower 8 bits)				COMREV =1	COMREV =0																																																					
		0x00 ... 0x11	0x20 ... 0x3f	0x40 ... 0x5f	0x60 ... 0x7f			0x80 ... 0x9f	0xa0 ... 0xff																																																									
Display data RAM	0x48**	D0	Display area A	D1	COM0	COM31	0x40 ... 0x5f	0x60 ... 0x7f	0x80 ... 0x9f	0xa0 ... 0xff	Unavailable area	D2	COM31	COM0																																																				
	D3	COM30		COM1																																																														
	D4											COM29			COM2																																																			
	D5															COM28	COM3																																																	
	D6																	COM27	COM4																																															
	D7																			COM26	COM5																																													
	0x49**																					D0	COM25	COM6																																										
	D1																					COM24			COM7																																									
	D2																									COM23	COM8																																							
	D3																											COM22	COM9																																					
	D4																													COM21	COM10																																			
	D5																															COM20	COM11																																	
	D6																																	COM19	COM12																															
	D7																																			COM18	COM13																													
	0x4a**																																					D0	COM17	COM14																										
	D1																																					COM16			COM15																									
	D2																																									COM15	COM16																							
	D3																																											COM14	COM17																					
	D4																																													COM13	COM18																			
	D5																																															COM12	COM19																	
	D6																																																	COM11	COM20															
	D7																																																			COM10	COM21													
	0x4b**																																																					D0	COM9	COM22										
	D1																																																					COM8			COM23									
	D2																																																									COM7	COM24							
	D3																																																											COM6	COM25					
	D4																																																													COM5	COM26			
	D5																																																															COM4	COM27	
D6	COM3		COM28																																																															
D7		COM2		COM29																																																														
0x4c**					D0	COM1	COM30																																																											
D1					COM0			COM31																																																										
D2									COM31	COM0																																																								
D3											COM30	COM1																																																						
D4													COM29	COM2																																																				
D5															COM28	COM3																																																		
D6																	COM27	COM4																																																
D7																			COM26	COM5																																														
0x4d**																					D0	COM25	COM6																																											
D1																					COM24			COM7																																										
D2																									COM23	COM8																																								
D3																											COM22	COM9																																						
D4																													COM21	COM10																																				
D5																															COM20	COM11																																		
D6																																	COM19	COM12																																
D7																																			COM18	COM13																														
Gray-scale data RAM																																					0x78**	D0	Display area A	D1	COM17	COM14	0x40 ... 0x5f	0x60 ... 0x7f	0x80 ... 0x9f	0xa0 ... 0xff	Unavailable area																			D2
																																					D3	COM14		COM17																										
																																					D4											COM13	COM18																	
																																					D5													COM12	COM19															
																																					D6															COM11	COM20													
																																					D7																	COM10	COM21											
																																					0x79**																			D0	COM9	COM22								
																																					D1																			COM8			COM23							
																																					D2																							COM7	COM24					
																																					D3																									COM6	COM25			
	D4		COM5																																		COM26																													
	D5	COM4		COM27																																																														
	D6					COM3	COM28																																																											
	D7				COM2			COM29																																																										
	0x7a**								D0	COM1																																																						COM30		
	D1								COM0		COM31																																																							
	D2											COM31	COM0																																																					
	D3													COM30	COM1																																																			
	D4															COM29	COM2																																																	
	D5																	COM28	COM3																																															
	D6																			COM27		COM4																																												
	D7																				COM26		COM5																																											
	0x7b**																							D0	COM25	COM6																																								
	D1																							COM24			COM7																																							
	D2																											COM23	COM8																																					
	D3																													COM22	COM9																																			
	D4																															COM21	COM10																																	
	D5																																	COM20	COM11																															
D6	COM19																																			COM12																														
D7																																						COM18	COM13																											
0x7c**																																								D0	COM17	COM14																								
D1																																								COM16			COM15																							
D2																																												COM15	COM16																					
D3																																														COM14	COM17																			
D4																																																COM13	COM18																	
D5																																																		COM12	COM19															
D6																																																				COM11	COM20													
D7																																																						COM10	COM21											
0x7d**			D0																																		COM9																			COM22										
D1		COM8	COM23																																																															
D2				COM7		COM24																																																												
D3					COM6		COM25																																																											
D4								COM5		COM26																																																								
D5									COM4		COM27																																																							
D6												COM3	COM28																																																					
D7														COM2	COM29																																																			
SEGREV=1																SEG0 ... SEG31	SEG32 ... SEG63																																								SEG127 ... SEG96	SEG95 ... SEG64	SEG128 ... SEG159							
SEGREV=0																SEG64 ... SEG95	SEG96 ... SEG127	SEG63 ... SEG32	SEG31 ... SEG0																																						SEG128 ... SEG159									

Figure 21.6.4 Display Data RAM and Gray-Scale Data RAM Map (with 1/32 duty Type B selected)

21 LCD DRIVER (LCD32A)

Address	Bit	Address (lower 8 bits)																COMREV =1	COMREV =0	
		0x00	...	0x11	0x20	...	0x3f	0x40	...	0x5f	0x60	...	0x7f	0x80	...	0x9f	0xa0			...
Display data RAM	0x48**	D0																	COM0	COM23
		D1																	COM1	COM22
		D2																	COM2	COM21
		D3																	COM3	COM20
		D4																	COM4	COM19
		D5																	COM5	COM18
		D6																	COM6	COM17
		D7																	COM7	COM16
	0x49**	D0																	COM8	COM15
		D1																	COM9	COM14
		D2																	COM10	COM13
		D3																	COM11	COM12
		D4																	COM12	COM11
		D5																	COM13	COM10
		D6																	COM14	COM9
		D7																	COM15	COM8
	0x4a**	D0																	COM16	COM7
		D1																	COM17	COM6
		D2																	COM18	COM5
		D3																	COM19	COM4
		D4																	COM20	COM3
		D5																	COM21	COM2
		D6																	COM22	COM1
		D7																	COM23	COM0
0x4b**	D0	COM0	COM23																	
	D1	COM1	COM22																	
	D2	COM2	COM21																	
	D3	COM3	COM20																	
	D4	COM4	COM19																	
	D5	COM5	COM18																	
	D6	COM6	COM17																	
	D7	COM7	COM16																	
0x4c**	D0	COM8	COM15																	
	D1	COM9	COM14																	
	D2	COM10	COM13																	
	D3	COM11	COM12																	
	D4	COM12	COM11																	
	D5	COM13	COM10																	
	D6	COM14	COM9																	
	D7	COM15	COM8																	
0x4d**	D0	COM16	COM7																	
	D1	COM17	COM6																	
	D2	COM18	COM5																	
	D3	COM19	COM4																	
	D4	COM20	COM3																	
	D5	COM21	COM2																	
	D6	COM22	COM1																	
	D7	COM23	COM0																	
Gray-scale data RAM	0x78**	D0																	COM0	COM23
		D1																	COM1	COM22
		D2																	COM2	COM21
		D3																	COM3	COM20
		D4																	COM4	COM19
		D5																	COM5	COM18
		D6																	COM6	COM17
		D7																	COM7	COM16
	0x79**	D0																	COM8	COM15
		D1																	COM9	COM14
		D2																	COM10	COM13
		D3																	COM11	COM12
		D4																	COM12	COM11
		D5																	COM13	COM10
		D6																	COM14	COM9
		D7																	COM15	COM8
	0x7a**	D0																	COM16	COM7
		D1																	COM17	COM6
		D2																	COM18	COM5
		D3																	COM19	COM4
		D4																	COM20	COM3
		D5																	COM21	COM2
		D6																	COM22	COM1
		D7																	COM23	COM0
0x7b**	D0	COM0	COM23																	
	D1	COM1	COM22																	
	D2	COM2	COM21																	
	D3	COM3	COM20																	
	D4	COM4	COM19																	
	D5	COM5	COM18																	
	D6	COM6	COM17																	
	D7	COM7	COM16																	
0x7c**	D0	COM8	COM15																	
	D1	COM9	COM14																	
	D2	COM10	COM13																	
	D3	COM11	COM12																	
	D4	COM12	COM11																	
	D5	COM13	COM10																	
	D6	COM14	COM9																	
	D7	COM15	COM8																	
0x7d**	D0	COM16	COM7																	
	D1	COM17	COM6																	
	D2	COM18	COM5																	
	D3	COM19	COM4																	
	D4	COM20	COM3																	
	D5	COM21	COM2																	
	D6	COM22	COM1																	
	D7	COM23	COM0																	
SEGREV=1	SEG0	...	SEG31	SEG32	...	SEG63	SEG64	...	SEG95	SEG96	...	SEG127	SEG128	...	SEG159					
SEGREV=0	SEG159	...	SEG128	SEG127	...	SEG96	SEG95	...	SEG64	SEG63	...	SEG32	SEG31	...	SEG0					

Figure 21.6.5 Display Data RAM and Gray-Scale Data RAM Map (with 1/24 duty selected)

Address	Bit	Address (lower 8 bits)																COMREV =1	COMREV =0	
		0x00	...	0x1f	0x20	...	0x3f	0x40	...	0x5f	0x60	...	0x7f	0x80	...	0x9f	0xa0			...
Display data RAM	0x48**	D0	Display area 0																COM0	COM15
		D1																		
		D2																		
		D3																		
		D4																		
		D5																		
		D6																		
	0x49**	D0	Display area 0																COM7	COM8
		D1																		
		D2																		
		D3																		
		D4																		
		D5																		
		D6																		
0x4a**	D0	Display area 1																COM8	COM7	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			
0x4b**	D0	Display area 1																COM9	COM6	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			
0x4c**	D0	Unused area (general-purpose memory)																COM10	COM5	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			
0x4d**	D0	Unused area (general-purpose memory)																COM11	COM4	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			
Gray-scale data RAM	0x78**	D0	Display area 0																COM12	COM3
		D1																		
		D2																		
		D3																		
		D4																		
		D5																		
		D6																		
	0x79**	D0	Display area 0																COM13	COM2
		D1																		
		D2																		
		D3																		
		D4																		
		D5																		
		D6																		
0x7a**	D0	Display area 1																COM14	COM1	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			
0x7b**	D0	Display area 1																COM15	COM0	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			
0x7c**	D0	Unused area (general-purpose memory)																COM0	COM15	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			
0x7d**	D0	Unused area (general-purpose memory)																COM1	COM14	
	D1																			
	D2																			
	D3																			
	D4																			
	D5																			
	D6																			

SEGREV=1 SEG0 ... SEG31 SEG32 ... SEG63 SEG64 ... SEG95 SEG96 ... SEG127 SEG128 ... SEG159
 SEGREV=0 SEG159 ... SEG128 SEG127 ... SEG96 SEG95 ... SEG64 SEG63 ... SEG32 SEG31 ... SEG0

Figure 21.6.6 Display Data RAM and Gray-Scale Data RAM Map (with 1/16 duty selected)

21.7 Display Control

21.7.1 Display On/Off

The LCD display state is controlled using DSPC[1:0]/LCD_DCTL register.

Table 21.7.1.1 LCD Display Control

DSPC[1:0]	LCD display
0x3	All off (static)
0x2	All on (dynamic)
0x1	Normal display
0x0	Display off

(Default: 0x0)

Set DSPC[1:0] to 0x1 to display normally. However, the clock must be supplied in advance (see Section 21.4). When DSPC[1:0] set to anything except 0x0 before the clock is sourced, the LCD voltage can't be generated right. In this case, set back DSPC[1:0] to 0x0. After the clock be supplied, set again DSPC[1:0] to anything except 0x0.

Note: "The clock supplied state" is the state that the clock is supplied to LCD driver circuit after oscillation circuit is enable, oscillation start time and stable time through, and LCD clock set to enable.

If "Display off" is selected, the drive voltage supplied from the LCD system voltage regulator stops, and the VC1 to VC5 pins are all set to Vss level.

Since "All on" and "All off" directly control the driving waveform output by the LCD driver, display memory data is not altered. Common pins are set to dynamic drive for "All on" and to static drive for "All off." This function can be used to make the display flash on and off without altering the display memory.

DSPC[1:0] is reset to 0x0 (Display off) after an initial reset or when the s1p instruction is executed.

21.7.2 LCD Contrast Adjustment

The LCD contrast can be adjusted to one of 16 levels using LC[3:0]/LCD_CADJ register. Contrast is adjusted by controlling the voltages VC1 to VC5 output by the internal LCD system voltage regulator.

Table 21.7.2.1 LCD Contrast Adjustment

LC[3:0]	Contrast
0xf	High (dark)
0xe	↑
:	:
0x1	↓
0x0	Low (light)

(Default: 0x7)

LC[3:0] is set to 0x7 after an initial reset. Initialization via software is required to achieve the required contrast.

21.7.3 Inverted Display

The LCD display can be inverted (black/white inversion) using merely control bit manipulation, without changing the display memory. Setting DSPREV/LCD_DCTL register to 0 inverts the display; setting to 1 returns the display to normal status.

Note that the display will not be inverted if "All off" is selected using DSPC[1:0]. The display will be inverted when "All on" is selected.

Note: Even when the inverted display is enabled in gray-scale mode, the 2/4 gray-scale and 3/4 gray-scale bits may not be inverted.

21.7.4 Gray-Scale Display

To start gray-scale display, data must be set in both display data RAM and gray-scale data RAM, and the following procedure must be followed.

- (1) Select any settings by the FRMCYC/LCD_CADJ register.
- (2) Set the GSEN/LCD_CADJ register to 1.
- (3) Set the DSPC/LCD_DTCTL register to 0x1 and execute the display.

Select the FRMCYC/LCD_CADJ register by checking the panel display so that the gray-scale display is easy to watch.

21.8 LCD Interrupt

The LCD module includes a function for generating interrupts using the frame signal.

Frame interrupt

This cause of interrupt occurs every frame and sets the interrupt flag FRMIF/LCD_IFLG register in the LCD module to 1. See Figures 21.5.2.1 to 21.5.2.3 for interrupt timings.

To use this interrupt, set FRMIE/LCD_IMSK register to 1. When FRMIE is set to 0 (default), interrupt requests for this interrupt cause are not sent to the interrupt controller (ITC).

If FRMIF is set to 1 while FRMIE is set to 1 (interrupt enabled), the LCD module outputs an interrupt request to the ITC. An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- To prevent interrupt recurrences, the LCD module interrupt flag FRMIF must be reset in the interrupt handler routine after an LCD interrupt has occurred.
 - To prevent unwanted interrupts, FRMIF should be reset before enabling LCD interrupts with FRMIE.

21.9 Control Register Details

Table 21.9.1 List of LCD Registers

Address	Register name		Function
0x5063	LCD_CLK	LCD Clock Select Register	Selects the LCD clock.
0x50a0	LCD_DCTL	LCD Display Control Register	Controls the LCD display.
0x50a1	LCD_CADJ	LCD Contrast Adjustment Register	Controls the contrast.
0x50a2	LCD_CCTL	LCD Clock Control Register	Controls the LCD drive duty.
0x50a3	LCD_VREG	LCD Voltage Regulator Control Register	Controls the LCD drive voltage regulator.
0x50a4	LCD_PWR	LCD Power Voltage Booster Control Register	Controls the LCD voltage booster.
0x50a5	LCD_IMSK	LCD Interrupt Mask Register	Enables/disables interrupts.
0x50a6	LCD_IFLG	LCD Interrupt Flag Register	Indicates/resets interrupt occurrence status.
0x50a7	LCD_COMC0	COM Terminal Control 0 Register	Controls COM pins.
0x50a8	LCD_COMC1	COM Terminal Control 1 Register	Controls COM pins.
0x50a9	LCD_COMC2	COM Terminal Control 2 Register	Controls COM pins.
0x50aa	LCD_COMC3	COM Terminal Control 3 Register	Controls COM pins.
0x50ab	LCD_SEGC	SEG Terminal Control Register	Controls SEG pins.

The LCD module registers are described in detail below. These are 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

LCD Clock Select Register (LCD_CLK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
LCD Clock Select Register (LCD_CLK)	0x5063 (8 bits)	D7	–	reserved	–	–	–	0 when being read.	
		D6–4	LCKDV[2:0]	LCD clock division ratio select	LCKDV[2:0]	Division ratio	0x0	R/W	When the clock source is IOSC or OSC3
					0x7–0x5	reserved			
					0x4	1/512			
					0x3	1/256			
D[3:2]	LCKSRC [1:0]	LCD clock source select	LCKSRC[1:0]	Clock source	0x1	R/W			
			0x3	reserved					
			0x2	OSC3					
D1	–	reserved	–	–	–	–	0 when being read.		
D0	LCKEN	LCD clock enable	1 Enable	0 Disable	0	R/W			

D7 Reserved

D[6:4] LCKDV[2:0]: LCD Clock Division Ratio Select Bits

Selects the division ratio when IOSC or OSC3 is selected as the LCD clock source.

Table 21.9.2 IOSC/OSC3 Division Ratio Selection

LCKDV[2:0]	Division ratio
0x7–0x5	Reserved
0x4	1/512
0x3	1/256
0x2	1/128
0x1	1/64
0x0	1/32

(Default: 0x0)

No division ratio needs to be selected if OSC1 is selected as the LCD clock source.

D[3:2] LCKSRC: LCD Clock Source Select Bit

Selects the LCD clock source.

Table 21.9.3 Clock Source Selection

LCKSRC[1:0]	Clock source
0x3	reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x1)

D1 Reserved

D0 LCKEN: LCD Clock Enable Bit

Enables or disables the LCD clock supply to the LCD driver.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

The LCKEN default setting is 0, which stops the clock. Setting LCKEN to 1 feeds the clock selected as above to the LCD driver. If no LCD display is required, stop the clock to reduce current consumption.

LCD Display Control Register (LCD_DCTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
LCD Display Control Register (LCD_DCTL)	0x50a0 (8 bits)	D7	SEGREV	Segment output assignment control	1 Normal	0 Reverse	1	R/W		
		D6	COMREV	Common output assignment control	1 Normal	0 Reverse	1	R/W		
		D5	DSPAR	Display memory area control	1 Area 1	0 Area 0	0	R/W		
		D4	DSPREV	Reverse display control	1 Normal	0 Reverse	1	R/W		
		D3	—	reserved		—		0	R	0 when being read.
		D2	COMPOS	Common pin assignment control	1 Center	0 End	0	R/W		
		D1–0	DSPC[1:0]	LCD display control	DSPC[1:0]	Display	0	R/W		
				0x3	All off					
				0x2	All on					
				0x1	Normal display					
				0x0	Display off					

D7 SEGREV: Segment Output Assignment Control Bit

Inverts memory assignments for SEG pins.

1 (R/W): Normal (default)

0 (R/W): Inverted

When SEGREV is set to 1 (default), memory addresses are assigned to SEG pins in ascending order. When SEGREV is set to 0, memory addresses are assigned to SEG pins in descending order (except for 1/32 duty Type B). (See Figures 21.6.2 to 21.6.7.)

D6 COMREV: Common Output Assignment Control Bit

Inverts memory assignments for COM pins.

1 (R/W): Normal (default)

0 (R/W): Inverted

When COMREV is set to 1 (default), memory bits are assigned to COM pins in ascending order. When COMREV is set to 0, memory bits are assigned to COM pins in descending order (except for 1/32 duty Type A and B). (See Figures 21.6.2 to 21.6.6.)

D5 DSPAR: Display Memory Area Control Bit

Selects the display area when driving the LCD in 1/24 or 1/16 duty.

1 (R/W): Display area 1

0 (R/W): Display area 0 (default)

Selects which of the two display areas reserved in the display memory is displayed when driving the LCD in 1/24 or 1/16 duty. Setting DSPAR to 0 selects display area 0; setting to 1 selects display area 1. See Figures 21.6.5 and 21.6.6 for the display areas.

D4 DSPREV: Reverse Display Control Bit

Inverts (negative display) the LCD display.

1 (R/W): Normal display (default)

0 (R/W): Inverted display

Setting DSPREV to 0 inverts the LCD panel display; setting to 1 returns the display to normal status. This operation does not affect the contents of the display memory.

D3 Reserved

D2 COMPOS: Common Pin Assignment Control Bit

Changes the COM pin assignment on the package.

1 (R/W): Center

0 (R/W): Both ends (default)

Select one according to the COM/SEG pin layout on the LCD panel (see Section 21.2).

D[1:0] DSPC[1:0]: LCD Display Control Bits

Controls the LCD display.

Table 21.9.4 LCD Display Control

DSPC[1:0]	LCD display
0x3	All off (static)
0x2	All on (dynamic)
0x1	Normal display
0x0	Display off

(Default: 0x0)

For normal display, set DSPC[1:0] to 0x1. Note that the clock must be supplied. (See Section 21.4.)

If “Display off” is selected, the drive voltage supplied from the LCD system voltage regulator stops, and the Vc1 to Vc5 pins are all set to Vss level.

Since “All on” and “All off” directly control the driving waveform output by the LCD driver, display memory data is not altered. Common pins are set to dynamic drive for “All on” and to static drive for “All off.” This function can be used to make the display flash on and off without altering the display memory.

DSPC[1:0] is reset to 0x0 (Display off) after an initial reset or when the s1p instruction is executed.

LCD Contrast Adjustment Register (LCD_CADJ)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
LCD Contrast Adjustment Register (LCD_CADJ)	0x50a1 (8 bits)	D7-5	FRMICYC [2:0]	1 cycle Frame numbers selection control	LC[3:0]	Display	0	R/W	
					0x7	Pattern 8			
					0x6	Pattern 7			
					0x5	Pattern 6			
					0x4	Pattern 5			
					0x3	Pattern 4			
					0x2	Pattern 3			
					0x1	Pattern 2			
					0x0	Pattern 1			
		D4	GSEN	Gray-scale display enable	1 G/S Display Mode	0 Normal Display Mode	0	R/W	
		D3-0	LC[3:0]	LCD contrast adjust	LC[3:0]	Display	0x7	R/W	
					0xf	Dark			
					:	:			
					0x0	Light			

D[7:5] FRMICYC: 1 Cycle Frame Numbers Selection Control Bits

Sets the FRC (Frame Rate Control) patterns of gray-scale display.

Table 21.9.5 FRC Pattern Settings

FRMICYC[2:0]	FRC patterns
0x7	Pattern 8 (every 5 frames)
0x6	Pattern 7 (every 5 frames)
0x5	Pattern 6 (every 5 frames)
0x4	Pattern 5 (every 5 frames)
0x3	Pattern 4 (every 5 frames)
0x2	Pattern 3 (every 4 frames)
0x1	Pattern 2 (every 3 frames)
0x0	Pattern 1 (every 3 frames)

(Default: 0x0)

D4 GSEN: Gray-scale Display Enable Bit

Sets the gray-scale display mode.

1 (R/W): Gray-scale display mode

0 (R/W): Normal display mode (default)

If the GSEN is set to 1, the gray-scale RAM setting is enabled and the gray-scale of FRC patterns (set by the FRMICYC) is displayed.

D[3:0] LC[3:0]: LCD Contrast Adjustment Bits

Adjusts the LCD contrast by controlling voltages Vc1 to Vc5 output by the internal LCD system voltage regulator.

Table 21.9.6 LCD Contrast Adjustment

LC[3:0]	Contrast
0xf	High (dark)
0xe	↑
:	:
0x1	↓
0x0	Low (light)

(Default: 0x7)

LC[3:0] is set to 0x7 after an initial reset. Initialization via software is required to achieve the required contrast.

LCD Clock Control Register (LCD_CCTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
LCD Clock Control Register (LCD_CCTL)	0x50a2 (8 bits)	D7–4	FRMCNT[3:0]	Frame frequency control	FRMCNT[3:0] = $\frac{\text{FRMDIV} \times \text{fLCLK} \times \text{duty}}{\text{fLFR}} - 1$	0x3	R/W	
		D3	FRMDIV	Frame division rate select bits	1 1/1 0 1/4	0	R/W	0 when being read.
		D2–0	LDUTY[2:0]	Duty selection control	LDUTY[2:0] Duty	0x2	R/W	
					0x7–0x6 reserved 0x5 1/32 (Type B) 0x4 1/32 (Type A) 0x3 1/24 0x2 1/32 (Normal) 0x1 1/16 0x0 reserved (1/8 Duty)			

D[7:4] FRMCNT[3:0]: Frame Frequency Control Bits

Sets the Frame frequency.

The LCD driver generates the frame signal by dividing LCLK. FRMCNT[3:0] is used to select the clock division ratio. The frame frequency is calculated by the equation shown below.

$$\text{Frame frequency [Hz]} = \frac{\text{fLCLK}}{(\text{FRMCNT} + 1)} \times \text{FRMDIV} \times \text{LCD drive duty}$$

fLCLK: LCLK frequency [Hz]
FRMCNT: FRMCNT[3:0] setting (0 to 15)
FRMDIV: 1/4 or 1/1
LCD drive duty: 1/32, 1/24 or 1/16

D3 FRMDIV: Frame Division Rate Select Bits

Sets the division to 1/4 (normal display) or 1/1 (gray-scale display).

1 (R/W): 1/1 (Gray-scale display mode)

0 (R/W): 1/4 (Normal display mode) (default)

D[2:0] LDUTY[2:0]: LCD Duty Select Bits

Selects the drive duty.

Table 21.9.7 Drive Duty Settings

LDUTY[2:0]	Duty	Valid common pins	Valid segment pins	Max. number of display pixels
0x7–0x6	Reserved	–	–	–
0x5	1/32 (Type B)*	COM0 to COM31	SEG0 to SEG159	5,120 pixels
0x4	1/32 (Type A)*	COM0 to COM31	SEG0 to SEG159	5,120 pixels
0x3	1/24	COM0 to COM23	SEG0 to SEG159	3,840 pixels
0x2	1/32	COM0 to COM31	SEG0 to SEG159	5,120 pixels
0x1	1/16	COM0 to COM15	SEG0 to SEG159	2,560 pixels
0x0	Reserved	–	–	–

* 64-COM emulation mode (See Section 21.5.3.)

(Default: 0x2)

LCD Voltage Regulator Control Register (LCD_VREG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
LCD Voltage Regulator Control Register (LCD_VREG)	0x50a3 (8 bits)	D7-5	–	reserved	–	0	R	0 when being read.
		D4	LHVLD	LCD heavy load protection mode	1 On 0 Off	0	R/W	
		D3-0	–	reserved	–	0	R	0 when being read.

For more information on the control bit, see “LCD Voltage Regulator Control Register (LCD_VREG)” in the “Power Supply” chapter.

LCD Power Voltage Booster Control Register (LCD_PWR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
LCD Power Voltage Booster Control Register (LCD_PWR)	0x50a4 (8 bits)	D7-2	–	reserved	–	0	R	0 when being read.
		D1	VDSEL	Regulator power source select	1 V _{D2} 0 V _{DD}	0	R/W	
		D0	PBON	Power voltage booster control	1 On 0 Off	0	R/W	

For more information on these control bits, see “LCD Power Voltage Booster Control Register (LCD_PWR)” in the “Power Supply” chapter.

LCD Interrupt Mask Register (LCD_IMSK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
LCD Interrupt Mask Register (LCD_IMASK)	0x50a5 (8 bits)	D7-1	–	reserved	–	0	R	0 when being read.
		D0	IFRMEN	Frame signal interrupt enable	–	0	R/W	

D[7:1] Reserved

D0 FRMIE: Frame Signal Interrupt Enable Bit

Enables or disables frame interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting FRMIE to 1 enables LCD interrupt requests to the ITC. Setting to 0 disables interrupts.

LCD Interrupt Flag Register (LCD_IFLG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
LCD Interrupt Flag Register (LCD_IFLG)	0x50a6 (8 bits)	D7-1	–	reserved	–	0	R	0 when being read.
		D0	IFRMFLG	Frame signal interrupt flag	–	0	R/W	Cleared by writing 1.

D[7:1] Reserved

D0 FRMIF: Frame Signal Interrupt Flag Bit

Indicates the frame interrupt cause occurrence status.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

FRMIF is set to 1 at the frame signal rising edge. FRMIF is reset to 0 by writing 1.

COM Terminal Controlx Registers (LCD_COMCx)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
COM Terminal Controlx (LCD_COMCx)	0x50a7	D7-0	COMx DEN	COMx drive enable	1 Enable	0 Disable	1	R/W	
	0x50a8								
	0x50a9								
	0x50aa								

D[7:0] COMx[7:0] Drive Enable Bits

Sets the each COM terminal outputs to the OFF waveform (Display off waveform).

1 (R/W): Normal drive

0 (R/W): OFF waveform output

SEG Terminal Control Register (LCD_SEGC)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
SEG Terminal Control (LCD_SEGC)	0x50ab	D7-5	–	reserved	–	0	R	0 when being read.
		D4-0	NLINE[4:0]	SEG n line reverse drive selection	NLINE[4:0] Reverse line	0	R/W	
					0xf 31 lines			
					: :			
					0x1 1 line			
					0x0 Normal			

D[7:5] Reserved

D[4:0] SEG n Line[4:0] Reverse Drive Selection Bits

Enables the n-line AC reverse drive and sets the reverse lines

Table 21.9.8 Selecting Reverse Lines

NLINE[4:0]	Reverse lines
0xF	31 lines
:	:
0x1	1 line
0x0	Normal

22 A/D Converter (ADC10)

22.1 ADC10 Module Overview

The S1C17706 includes an A/D converter (ADC10) that converts analog input signals into 10-bit digital values. The following shows the features of the ADC10 module:

- Conversion method: Successive approximation type
- Resolution: 10 bits
- Input channels: Max. 8 channels
- A/D conversion clock: Max. 2 MHz
- Analog input voltage range: V_{SS} to AV_{DD} ($= V_{DD}$)
- Sampling & hold circuit included
- Supports two conversion modes:
 - One-time conversion mode
(for single channel or multi-channels)
 - Continuous conversion mode
(for single channel or multi-channels, terminated with software)
- Supports three conversion triggers:
 - Software trigger
 - External trigger (input from the #ADTRG pin)
 - T16 Ch.1 underflow trigger
- The conversion results can be read as 16-bit data with the 10-bit converted data aligned to left or right.
- Two types of interrupts can be generated: Conversion completion interrupt
Conversion data overwrite error interrupt

Figure 22.1.1 shows the ADC10 configuration.

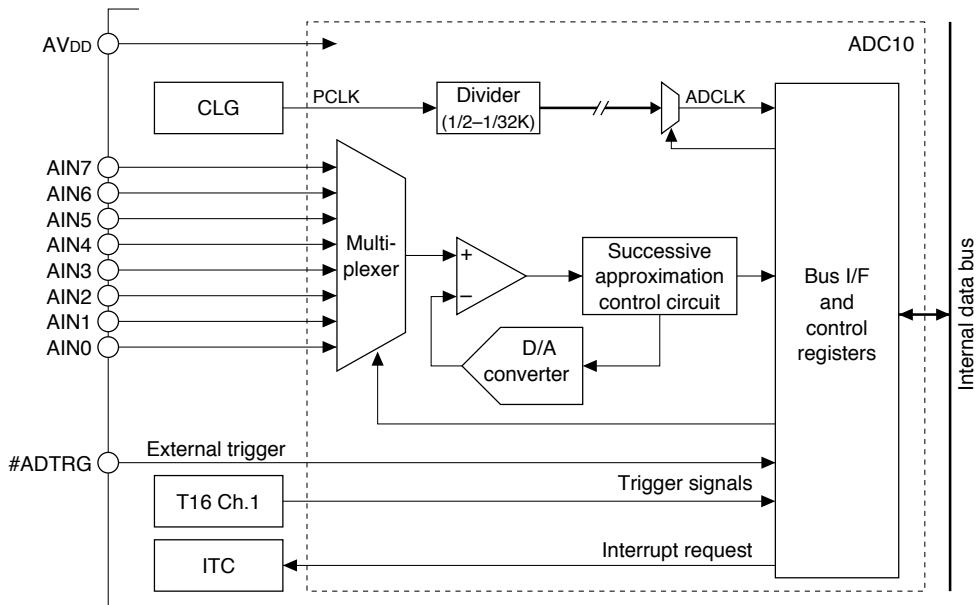


Figure 22.1.1 A/D Converter Configuration

22.2 ADC10 Input Pins

Table 22.2.1 lists the ADC10 input pins.

Table 22.2.1 List of ADC10 Input Pins

Pin name	I/O	Qty	Function
AIN[7:0]	I	8	Analog signal input pins AIN0 (Ch.0) to AIN7 (Ch.7) (see Note below) Input the analog signals to be A/D converted. The analog input voltage AV_{IN} must be within the range of $V_{SS} \leq AV_{IN} \leq AV_{DD} (= V_{DD})$.
#ADTRG	I	1	External trigger input pin Input a trigger signal to start A/D conversion from an external source.
AV_{DD}	–	1	Analog power-supply pin ($AV_{DD} = V_{DD}$) Always supply the V_{DD} voltage even if the A/D converter is not used.

Note: The pins go to high impedance status when the port function is switched.

The A/D converter input pins (AIN[7:0], #ADTRG) are shared with I/O ports and are initially set as general purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general purpose I/O port pins as A/D converter input pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

22.3 A/D Converter Settings

Make the following settings before starting A/D conversion.

- (1) Set the analog input pins. See Section 22.2.
- (2) Set the A/D conversion clock.
- (3) Select the A/D conversion start and end channels.
- (4) Select the A/D conversion mode.
- (5) Select the A/D conversion trigger source.
- (6) Set the sampling time.
- (7) Select the conversion result storing mode.
- (8) When using A/D converter interrupts, set interrupt conditions. See Section 22.5.

Note: Make sure the A/D converter is disabled (ADEN/ADC10_CTL register = 0) before changing the above settings. Changing the settings while the A/D converter is enabled may cause a malfunction.

22.3.1 A/D Conversion Clock Setting

To use the A/D converter, the clock used in the A/D converter must be supplied by turning on the peripheral module clock (PCLK) output from the clock generator (CLG). For more information on clock control, see the “Clock Generator (CLG)” chapters.

The A/D conversion is generated by dividing PCLK. The division ratio can be selected from the 15 types shown in Table 22.3.1.1 using ADDF[3:0]/ADC10_CLK register.

Note: For the A/D conversion clock frequency range that can be used for this A/D converter, see “A/D Converter Characteristics” in the “Electrical Characteristics” chapter.

Table 22.3.1.1 A/D Conversion Clock (PCLK Division Ratio) Selection

ADDF[3:0]	Division ratio
0xf	Reserved
0xe	1/32768
0xd	1/16384
0xc	1/8192
0xb	1/4096
0xa	1/2048
0x9	1/1024
0x8	1/512
0x7	1/256
0x6	1/128
0x5	1/64
0x4	1/32
0x3	1/16
0x2	1/8
0x1	1/4
0x0	1/2

(Default: 0x0)

22.3.2 Selecting A/D Conversion Start and End Channels

Select the channel in which the A/D conversion is to be performed from among the pins (channels) that have been set for analog input. To enable A/D conversions in multiple channels to be performed successively through one convert operation, specify the conversion start and conversion end channels using ADCS[2:0]/ADC10_TRG register and ADCE[2:0]/ADC10_TRG register, respectively.

Table 22.3.2.1 Relationship between ADCS/ADCE and Input Channels

ADCS[2:0]/ADCE[2:0]	Channel selected
0x7	AIN7
0x6	AIN6
0x5	AIN5
0x4	AIN4
0x3	AIN3
0x2	AIN2
0x1	AIN1
0x0	AIN0

(Default: 0x0)

Example: Operation of one A/D conversion

ADCS[2:0] = 0, ADCE[2:0] = 0

Converted only in AIN0

ADCS[2:0] = 0, ADCE[2:0] = 3

Converted in the following order: AIN0→AIN1→AIN2→AIN3

ADCS[2:0] = 2, ADCE[2:0] = 1

Converted in the following order: AIN2→AIN3→AIN4→AIN5→AIN6→AIN7→AIN0→AIN1

22.3.3 A/D Conversion Mode Setting

The A/D converter provides two conversion modes that can be selected using ADMS/ADC10_TRG register: one-time conversion mode and continuous conversion mode.

1. One-time conversion mode (ADMS = 0)

The A/D converter performs A/D conversion for all analog inputs within the range from the start channel specified by ADCS[2:0]/ADC10_TRG register to the end channel specified by the ADCE[2:0]/ADC10_TRG register once and then stops automatically.

2. Continuous conversion mode (ADMS = 1)

The A/D converter repeatedly performs A/D conversion for the channels in the range specified by ADCS[2:0] and ADCE[2:0] until stopped with software.

At initial reset, the A/D converter is set to one-time conversion mode.

22.3.4 Trigger Selection

Select a trigger source to start A/D conversion from among the three types listed in Table 22.3.4.1 using ADTS[1:0]/ADC10_TRG register.

Table 22.3.4.1 Trigger Selection

ADTS[1:0]	Trigger source
0x3	External trigger (#ADTRG)
0x2	Reserved
0x1	16-bit timer Ch.1
0x0	Software trigger

(Default: 0x0)

1. External trigger (#ADTRG)

The signal input to the #ADTRG pin is used as a trigger. To use this trigger source, the I/O port pin must be configured for the #ADTRG input using the port function select bit (see the “I/O Ports (P)” chapter). An A/D conversion starts when a falling edge of the #ADTRG signal is detected.

Note: When using an external trigger to start A/D conversion, ensure to maintain the Low period of the trigger signal input to the #ADTRG pin for two or more S1C17 Core operating clock cycles.

2. 16-bit timer (T16) Ch.1

The underflow signal of T16 Ch.1 is used as a trigger. Since the T16 underflow cycle can be programmed with flexibility, this trigger source is effective when periodic A/D conversions are required. For more information on timer settings, see the “16-bit Timers (T16)” chapter.

3. Software trigger

Writing 1 to ADST/ADC10_CTL register with software serves as a trigger to start A/D conversion.

22.3.5 Sampling Time Setting

The analog signal input sampling time in this A/D converter can be configured to eight steps (two to nine A/D conversion clock cycles) using ADST[2:0]/ADC10_TRG register.

Table 22.3.5.1 Sampling Time Settings

ADST[2:0]	Sampling time (in A/D conversion clock cycles)
0x7	9 cycles
0x6	8 cycles
0x5	7 cycles
0x4	6 cycles
0x3	5 cycles
0x2	4 cycles
0x1	3 cycles
0x0	2 cycles

(Default: 0x7)

The sampling time must satisfy the acquisition time condition (t_{ACQ} , time required for acquiring input voltage). Figure 22.3.5.1 shows an equivalent circuit of the analog input portion.

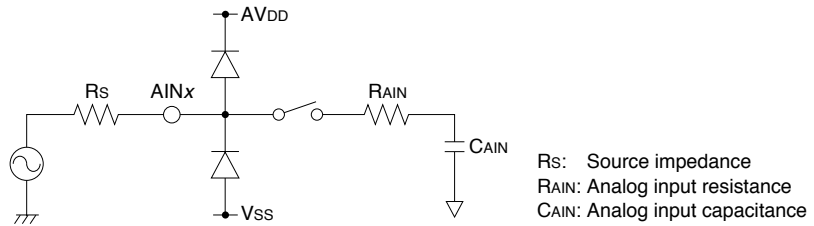


Figure 22.3.5.1 Equivalent Circuit of Analog Input Portion

Determine f_{ADCLK} and ADST[2:0] settings to satisfy the expression below.

$$t_{ACQ} = 8 \times (R_S + R_{AIN}) \times C_{AIN} \quad (\text{See "Electrical Characteristics" for the } R_{AIN} \text{ and } C_{AIN} \text{ values.})$$

$$\frac{1}{f_{ADCLK}} \times (\text{Number of clock cycles set by ADST[2:0]}) > t_{ACQ}$$

f_{ADCLK} : A/D conversion clock frequency [Hz]

The relationship between the sampling time and the sampling rate is listed below.

$$\text{Sampling rate [sps]} = \frac{f_{ADCLK}}{(\text{Number of clock cycles set by ADST[2:0]} + 11)}$$

22.3.6 Setting Conversion Result Storing Mode

The A/D converter loads the 10-bit conversion results into ADD[15:0]/ADC10_ADD register (16-bit register) after an A/D conversion has completed. At this time, the 10-bit conversion results are aligned in the 16-bit register according to the conversion result storing mode set with STMD/ADC10_TRG register either as the high-order 10 bits (left justify mode) or the low-order 10 bits (right justify mode). The remaining six bits are all set to 0.

ADD bit	15	...	10	9	...	6	5	...	0		
Left justify mode (STMD = 1)	(MSB)	10-bit conversion results						(LSB)	0	...	0
Right justify mode (STMD = 0)	0	...	0	(MSB)	10-bit conversion results			(LSB)			

Figure 22.3.6.1 Conversion Data Alignment

22.4 A/D Conversion Control and Operations

The A/D converter should be controlled in the sequence shown below.

1. Activate the A/D converter.
2. Start A/D conversion.
3. Read the A/D conversion results.
4. Terminate A/D conversion.

22.4.1 Activating A/D Converter

After the settings described in Section 22.3 have been completed, write 1 to ADEN/ADC10_CTL register to enable the A/D converter. The A/D converter is thereby ready to accept a trigger to start A/D conversion. To set up the A/D converter again, or when the A/D converter is not used, ADEN must be set to 0.

22.4.2 Starting A/D conversion

The A/D converter starts A/D conversion when a trigger is input while ADEN is 1. When software trigger is selected, an A/D conversion starts by writing 1 to ADCTL/ADC10_CTL register.

The A/D converter accepts triggers from only the trigger source selected by ADTS[1:0]/ADC10_TRG register.

Once a trigger is input, the A/D converter starts sampling of the analog input signal and A/D conversion beginning with the conversion start channel selected by ADCS[2:0]/ADC10_TRG register.

The software trigger bit ADCTL functions as an A/D conversion status bit that goes 1 while A/D conversion is underway even if it has started by another trigger source. The channel in which conversion is underway can be identified by reading ADICH[2:0]/ADC10_CTL register.

22.4.3 Reading A/D Conversion Results

Upon completion of the A/D conversion in the start channel, the A/D converter loads the conversion results into ADD[15:0]/ADC10_ADD register and sets the conversion completion flag ADCF/ADC10_CTL register. If multiple channels are specified using ADCS[2:0]/ADC10_TRG register and ADCE[2:0]/ADC10_TRG register, the A/D converter continues A/D conversions in the subsequent channels.

The results of A/D conversion are stored in ADD[15:0] each time conversion in one channel is completed. At the same time, a conversion completion interrupt can be generated, enabling to read out the converted data. If no conversion completion interrupt is used, read the conversion results from ADD[15:0] after confirming that ADCF is set to 1 indicating completion of conversion. ADCF is reset to 0 when ADD[15:0] is read.

When a single channel or multiple channels are being converted continuously, the conversion results must be read out from ADD[15:0] before the following conversion has completed. If the A/D conversion currently underway is completed while ADCF is set to 1 (before reading the previous conversion results), ADD[15:0] is overwritten and the overwrite error flag ADOWE/ADC10_CTL register is set to 1. At this time, a conversion data overwrite error interrupt can be generated. After the conversion results are read from ADD[15:0], ADOWE should be read to check whether the read data is valid or not. Or enable conversion data overwrite error interrupts and perform error handling using the interrupt. Once ADOWE is set, it will not be reset until software writes 1. Since ADCF is also set simultaneously with ADOWE, read out the converted data to reset ADCF.

Note: Occurrence of an overwrite error does not stop continuous conversion.

22.4.4 Terminating A/D Conversion

One-time conversion mode (ADMS = 0)


In one-time mode, the A/D converter performs A/D conversion within the channel range successively beginning with the conversion start channel specified by ADCS[2:0]/ADC10_TRG register and terminates once the conversion end channel specified by ADCE[2:0]/ADC10_TRG register has been completed. ADCTL/ADC10_CTL register is reset to 0 upon completion of the conversion sequence.

Continuous conversion mode (ADMS = 1)

In continuous conversion mode, the A/D converter repeatedly performs A/D conversion from the conversion start channel to the conversion end channel. The hardware does not stop the conversion sequence. To stop A/D conversion, write 0 to ADCTL. Since the conversion sequence is forcibly terminated, the results of the conversion then underway cannot be obtained.

22.4.5 Timing Charts

Figure 22.4.5.1 shows the operations of the A/D converter.

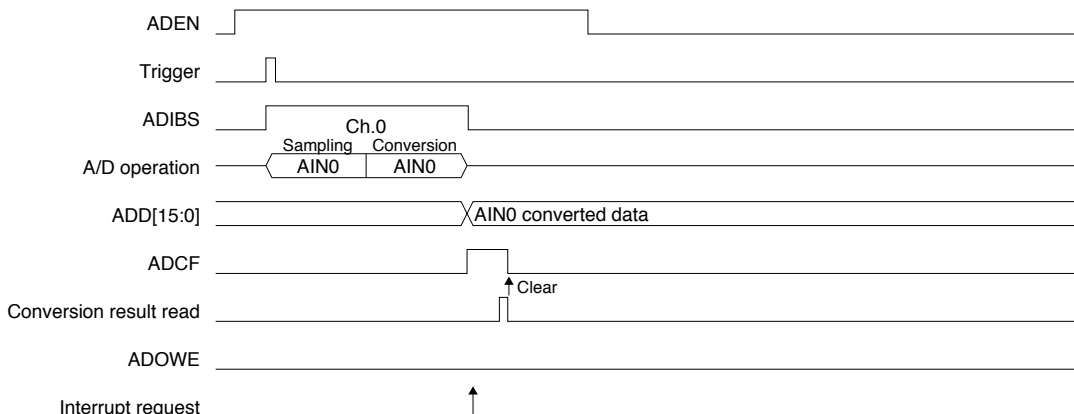

(1) Single channel (AIN0) one-time conversion mode (ADCS = 0, ADCE = 0, ADMS = 0)

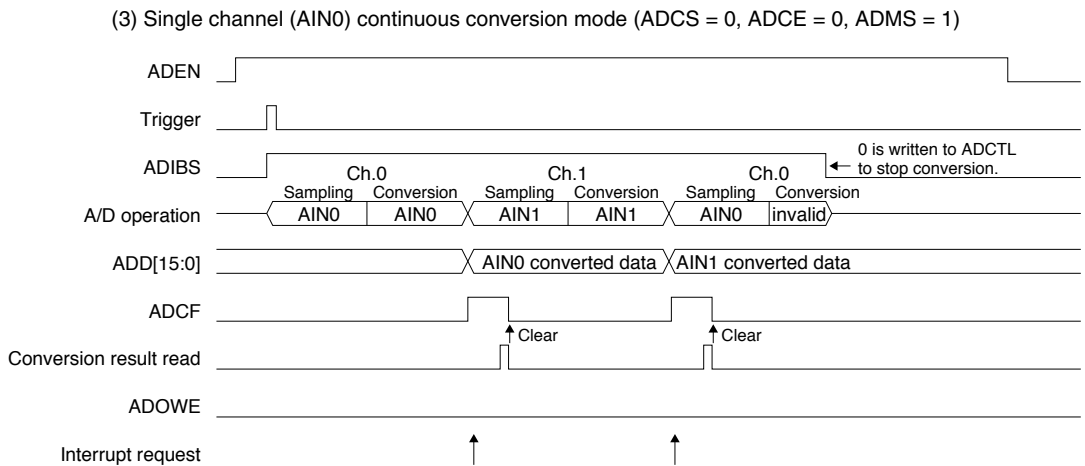
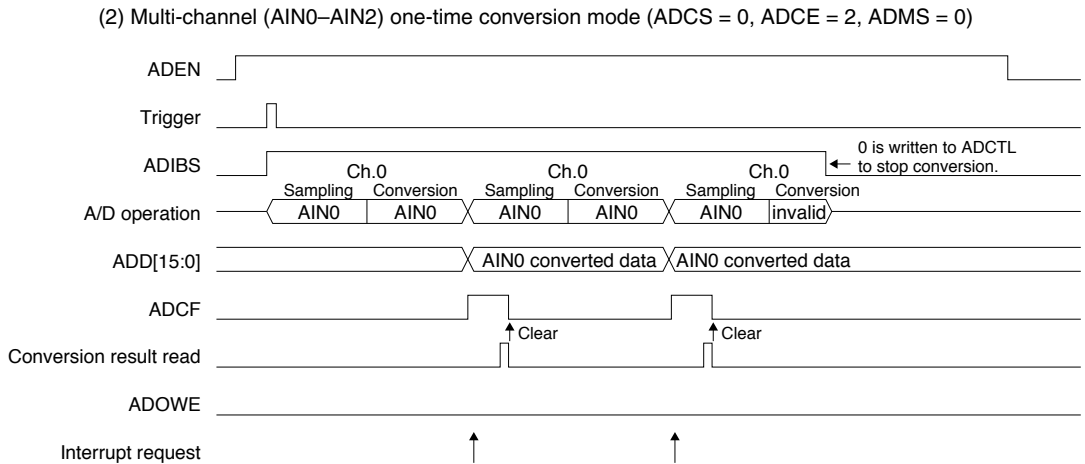
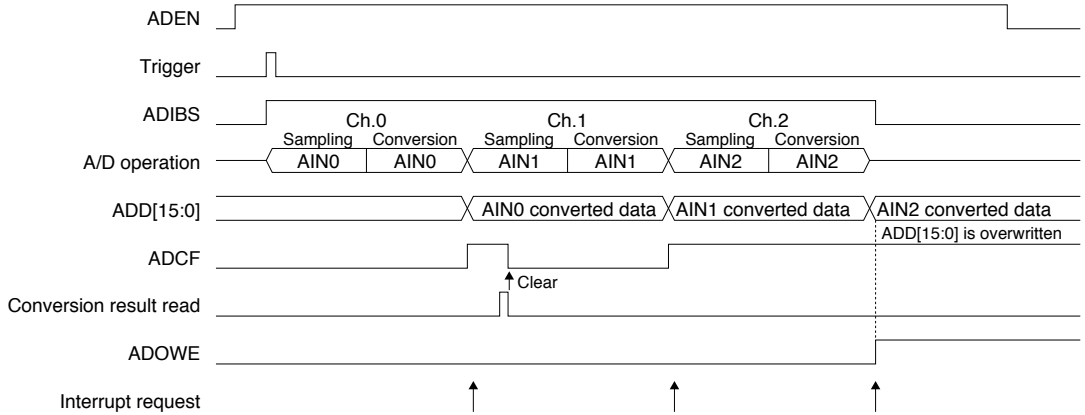


Figure 22.4.5.1 A/D Converter Operations

22.5 A/D Converter Interrupts

The A/D converter includes a function for generating the following two different types of interrupts.

- Conversion completion interrupt
- Conversion data overwrite error interrupt

The A/D converter outputs one interrupt signal shared by the two above interrupt causes to the interrupt controller (ITC). Inspect the status flag to determine the interrupt cause occurred.

Conversion completion interrupt

To use this interrupt, set ADCIE/ADC10_CTL register to 1. If ADCIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When A/D conversion in a channel has completed, the A/D converter sets ADCF/ADC10_CTL register to 1, indicating that the converted data can be read out. If conversion completion interrupts are enabled (ADCIE = 1), an interrupt request is sent simultaneously to the ITC.

An interrupt occurs if other interrupt conditions are met.

You can inspect ADCF in the ADC10 interrupt handler routine to determine whether the ADC10 interrupt is attributable to a completion of conversion. If ADCF is 1, the converted data can be read out from ADD[15:0]/ADC10_ADD register by the interrupt handler routine. The interrupt cause ADCF is reset to 0 by reading ADD[15:0] and this interrupt will not be generated until the subsequent conversion has completed.

Conversion data overwrite error interrupt

To use this interrupt, set ADOIE/ADC10_CTL register to 1. If ADOIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

If the following A/D conversion has completed when ADD[15:0] has not been read (ADCF = 1), the A/D converter sets ADOWE/ADC10_CTL register to 1, indicating that ADD[15:0] is overwritten. If conversion data overwrite error interrupts are enabled (ADOIE = 1), an interrupt request is sent simultaneously to the ITC.

An interrupt occurs if other interrupt conditions are met.

You can inspect ADOWE in the ADC10 interrupt handler routine to determine whether the ADC10 interrupt is attributable to an overwrite error. If ADOWE is 1, perform error handling by the interrupt handler routine. The interrupt cause ADOWE is reset to 0 by writing 1.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- To prevent interrupt recurrences, the ADCF/ADC10_CTL register and ADOWE/ADC10_CTL register must be reset in the interrupt handler routine after an ADC10 interrupt has occurred.
 - To prevent unwanted interrupts, reset ADCF and ADOWE before enabling interrupts with ADCIE/ADC10_CTL register and ADOIE/ADC10_CTL register.

22.6 Control Register Details

Table 22.6.1 List of ADC10 Registers

Address	Register name		Function
0x5380	ADC10_ADD	A/D Conversion Result Register	A/D converted data
0x5382	ADC10_TRG	A/D Trigger/Channel Select Register	Sets start/end channels and conversion mode.
0x5384	ADC10_CTL	A/D Control/Status Register	Controls A/D converter and indicates conversion status.
0x5386	ADC10_CLK	A/D Clock Control Register	Controls A/D converter clock.

The A/D converter registers are described in detail below. These are 16-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

A/D Conversion Result Register (ADC10_ADD)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
A/D Conversion Result Register (ADC10_ADD)	0x5380 (16 bits)	D15–0	ADD[15:0]	A/D converted data ADD[9:0] are effective when STMD = 0 (ADD[15:10] = 0) ADD[15:6] are effective when STMD = 1 (ADD[5:0] = 0)	0x0 to 0x3ff	0x0	R	

D[15:0] ADD[15:0]: A/D Converted Data Bits

The A/D conversion results are stored. (Default: 0x0)

The data alignment in this 16-bit register (conversion result storing mode) can be selected using the STMD/ADC10_TRG register.

ADD bit	15	...	10	9	...	6	5	...	0	
Left justify mode (STMD = 1)	(MSB)		10-bit conversion results				(LSB)	0	...	0
Right justify mode (STMD = 0)	0	...	0	(MSB)	10-bit conversion results				(LSB)	

Figure 22.6.1 Conversion Data Alignment

This register is a read-only, so writing to this register is ignored.

A/D Trigger/Channel Select Register (ADC10_TRG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
A/D Trigger/Channel Select Register (ADC10_TRG)	0x5382 (16 bits)	D15–14	–	reserved	–	–	–	0 when being read.
		D13–11	ADCE[2:0]	End channel select	0x0 to 0x7	0x0	R/W	
		D10–8	ADCS[2:0]	Start channel select	0x0 to 0x7	0x0	R/W	
		D7	STMD	Conversion result storing mode	1 ADD[15:6] 0 ADD[9:0]	0	R/W	
		D6	ADMS	Conversion mode select	1 Continuous 0 Single	0	R/W	
		D5–4	ADTS[1:0]	Conversion trigger select	ADTS[1:0] Trigger	0x0	R/W	
					0x3 #ADTRG pin reserved			
					0x2 reserved			
					0x1 T16 Ch.1			
					0x0 Software			
		D3	–	reserved	–	–	–	0 when being read.
		D2–0	ADST[2:0]	Sampling time setting	ADST[2:0] Sampling time	0x7	R/W	
					0x7 9 cycles			
					0x6 8 cycles			
					0x5 7 cycles			
					0x4 6 cycles			
					0x3 5 cycles			
					0x2 4 cycles			
					0x1 3 cycles			
					0x0 2 cycles			

D[15:14] Reserved

D[13:11] ADCE[2:0]: End Channel Select Bits

Sets the conversion end channel with a channel number from 0 to 7. (Default: 0x0 = AIN0)

Analog inputs can be A/D-converted continuously from the channel set by ADCS[2:0] to the channel set by ADCE[2:0] in one A/D conversion. If only one channel is to be A/D converted, set the same channel number in both ADCS[2:0] and ADCE[2:0].

Table 22.6.2 Relationship between ADCS/ADCE and Input Channels

ADCS[2:0]/ADCE[2:0]	Channel selected
0x7	AIN7
0x6	AIN6
0x5	AIN5
0x4	AIN4
0x3	AIN3
0x2	AIN2
0x1	AIN1
0x0	AIN0

(Default: 0x0)

D[10:8] ADCS[2:0]: Start Channel Select Bits

Sets the conversion start channel with a channel number from 0 to 7. (Default: 0x0 = AIN0)

D7 STMD: Conversion Result Storing Mode Bit

Selects the data alignment when the conversion results are loaded into ADD[15:0].

1 (R/W): Left justify mode (10-bit conversion results → ADD[15:6], ADD[5:0] = 0)

0 (R/W): Right justify mode (10-bit conversion results → ADD[9:0], ADD[15:10] = 0) (default)

D6 ADMS: Conversion Mode Select Bit

Selects an A/D conversion mode.

1 (R/W): Continuous conversion mode

0 (R/W): One-time conversion mode (default)

Writing 1 to ADMS sets the A/D converter to continuous conversion mode. In this mode, A/D conversions in the range of the channels selected by ADCS[2:0] and ADCE[2:0] are executed continuously until stopped with software.

When ADMS is 0, the A/D converter operates in one-time conversion mode. In this mode, A/D conversion is terminated after all inputs in the range of the channels selected by ADCS[2:0] and ADCE[2:0] have been converted once.

D[5:4] ADTS[1:0]: Conversion Trigger Select Bits

Selects a trigger source to start A/D conversion.

Table 22.6.3 Trigger Selection

ADTS[1:0]	Trigger source
0x3	External trigger (#ADTRG)
0x2	Reserved
0x1	16-bit timer Ch.1
0x0	Software trigger

(Default: 0x0)

When an external trigger is used, the #ADTRG pin must be configured in advance using the port function select bit (see the “I/O Ports (P)” chapter). A/D conversion is started when a falling edge of the #ADTRG signal is detected.

When 16-bit timer (T16) Ch.1 is used, since its underflow signal serves as a trigger, set the underflow cycle and other conditions for the timer.

D3 Reserved**D[2:0] ADST[2:0]: Sampling Time Setting Bits**

Sets the analog input sampling time.

Table 22.6.4 Sampling Time Settings

ADST[2:0]	Sampling time (in A/D conversion clock cycles)
0x7	9 cycles
0x6	8 cycles
0x5	7 cycles
0x4	6 cycles
0x3	5 cycles
0x2	4 cycles
0x1	3 cycles
0x0	2 cycles

(Default: 0x7)

A/D Control/Status Register (ADC10_CTL)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
A/D Control/ Status Register (ADC10_CTL)	0x5384 (16 bits)	D15	–	reserved	–	–	–	0 when being read.	
		D14–12	ADICH[2:0]	Conversion channel indicator	0x0 to 0x7	0x0	R		
		D11	–	reserved	–	–	–	0 when being read.	
		D10	ADIBS	ADC10 status	1 Busy 0 Idle	0 Idle	0	R	
		D9	ADOWE	Overwrite error flag	1 Error 0 Normal	0 Normal	0	R/W	Reset by writing 1.
		D8	ADCF	Conversion completion flag	1 Completed 0 Run/Stand- by	0 Run/Stand- by	0	R	Reset when ADC10_ADD is read.
		D7–6	–	reserved	–	–	–	–	0 when being read.
		D5	ADOIE	Overwrite interrupt enable	1 Enable 0 Disable	0 Disable	0	R/W	
		D4	ADCIE	Conversion completion int. enable	1 Enable 0 Disable	0 Disable	0	R/W	
		D3–2	–	reserved	–	–	–	–	0 when being read.
		D1	ADCTL	A/D conversion control	1 Start 0 Stop	0 Stop	0	R/W	
		D0	ADEN	ADC10 enable	1 Enable 0 Disable	0 Disable	0	R/W	

D15 Reserved

D[14:12] ADICH[2:0]: Conversion Channel Indicator Bits

Indicates the channel number (0 to 7) currently being A/D-converted. (Default: 0x0 = AIN0)

When A/D conversion is performed in multiple channels, read this bit to identify the channel in which conversion is underway.

D11 Reserved

D10 ADIBS: ADC10 Status Bit

Indicates the A/D converter status.

1 (R): Being converted

0 (R): Conversion completed/standby (default)

ADIBS is set to 1 at the input trigger signal edge (at the beginning of sampling) and is reset to 0 upon completion of conversion (when ADCTL is set to 0).

D9 ADOWE: Overwrite Error Flag Bit

Indicates that the converted results in ADD[15:0]/ADC10_ADD register have been overwritten before reading.

1 (R): Overwrite error (cause of interrupt has occurred)

0 (R): Normal (cause of interrupt has not occurred) (default)

1 (W): Flag is reset

0 (W): Ignored

When a single channel or multiple channels are being converted continuously, ADD[15:0] is overwritten and ADOWE is set to 1 if the A/D conversion currently underway is completed while ADCF is set to 1 (before reading the previous conversion results). After the conversion results are read from ADD[15:0], ADOWE should be read to check whether the read data is valid or not.

ADOWE is a cause of ADC10 interrupt. When ADOWE is set to 1, a conversion data overwrite error interrupt request is output to the ITC if ADOIE has been set to 1 (interrupt enabled). An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied.

ADOWE is reset by writing 1.

D8 ADCF: Conversion Completion Flag Bit

Indicates that A/D conversion has been completed.

1 (R): Conversion completed (cause of interrupt has occurred)

0 (R): Being converted/standby (cause of interrupt has not occurred) (default)

ADCF is set to 1 when A/D conversion is completed, and the converted data is loaded into ADD [15:0]/ADC10_ADD register.

ADCF is a cause of ADC10 interrupt. When ADCF is set to 1, a conversion completion interrupt request is output to the ITC if ADCIE has been set to 1 (interrupt enabled). An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied. ADCF is reset to 0 by reading ADD[15:0]. An overwrite error occurs if the next A/D conversion is completed while ADCF is set (see ADOWE above), ADCF must be reset by reading ADD[15:0] before an overwrite occurs. When an overwrite error occurs, ADCF is also set due to completion of conversion.

D[7:6] Reserved

D5 ADOIE: Overwrite Error Interrupt Enable Bit

Enables or disables interrupts caused by occurrences of conversion data overwrite errors.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting ADOIE to 1 enables conversion data overwrite error interrupt requests to the ITC; setting to 0 disables interrupts.

D4 ADCIE: Conversion Completion Interrupt Enable Bit

Enables or disables interrupts caused by completion of conversion.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting ADCIE to 1 enables conversion completion interrupt requests to the ITC; setting to 0 disables interrupts.

D[3:2] Reserved

D1 ADCTL: A/D Conversion Control Bit

Controls A/D conversion.

1 (W): Software trigger

0 (W): Stop A/D conversion

1 (R): Being converted

0 (R): Conversion completed/standby (default)

Write 1 to ADCTL to start A/D conversion by a software trigger. If any other trigger is used, ADCTL is automatically set to 1 by the hardware.

ADCTL remains set while A/D conversion is underway. In one-time conversion mode, upon completion of A/D conversion in the specified channels, ADCTL is reset to 0 and the A/D conversion circuit stops operating. To stop A/D conversion during operation in continuous conversion mode, reset ADCTL by writing 0.

When ADEN is 0, a trigger is not accepted.

D0 ADEN: ADC10 Enable Bit

Enables or disables the A/D converter operations.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Writing 1 to ADEN enables the A/D converter, meaning it is ready to start A/D conversion (i.e., ready to accept a trigger).

When ADEN is 0, the A/D converter is disabled, meaning it is unable to accept a trigger.

Before setting the modes, start/end channels, or other A/D converter conditions, be sure to reset ADEN to 0. This helps to prevent the A/D converter from operating erratically.

A/D Clock Control Register (ADC10_CLK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
A/D Clock Control Register (ADC10_CLK)	0x5386 (16 bits)	D15-4	--	reserved		--	--	0 when being read.	
		D3-0	ADDF[3:0]	A/D converter clock division ratio select	ADDF[3:0] Division ratio	0x0	R/W	Source clock = PCLK	
					0xf	reserved			
					0xe	1/32768			
					0xd	1/16384			
					0xc	1/8192			
					0xb	1/4096			
					0xa	1/2048			
					0x9	1/1024			
					0x8	1/512			
					0x7	1/256			
					0x6	1/128			
					0x5	1/64			
					0x4	1/32			
			0x3	1/16					
			0x2	1/8					
			0x1	1/4					
			0x0	1/2					

D[15:4] Reserved

D[3:0] ADDF[3:0]: A/D Converter Clock Division Ratio Select Bits

Selects a PCLK division ratio to generate the A/D converter clock.

Table 22.6.5 A/D Conversion Clock (PCLK Division Ratio) Selection

ADDF[3:0]	Division ratio
0xf	Reserved
0xe	1/32768
0xd	1/16384
0xc	1/8192
0xb	1/4096
0xa	1/2048
0x9	1/1024
0x8	1/512
0x7	1/256
0x6	1/128
0x5	1/64
0x4	1/32
0x3	1/16
0x2	1/8
0x1	1/4
0x0	1/2

(Default: 0x0)

Note: To use the A/D converter, the clock used in the A/D converter must be supplied by turning on the peripheral module clock (PCLK) output from the clock generator (CLG).

23 R/F Converter (RFC)

23.1 RFC Module Overview

The S1C17706 includes an R/F converter (RFC) module with two conversion channels. It is capable of being used as a CR oscillation type A/D converter. A thermo-hygrometer can easily be implemented by connecting only resistive or capacitive sensors (e.g., thermistor and humidity sensor) and a few passive elements (resistors and capacitors) to the R/F converter.

The following shows the features of the RFC module:

- Conversion method: Resistance to frequency conversion type
- Number of conversion channels: Max. 2 channels
- Oscillation mode: DC oscillation mode (for resistive sensors)
AC oscillation mode (for resistive sensors)
DC oscillation mode (for capacitive sensors)
- Counter length: 24 bits
- Five types of interrupts can be generated: Reference oscillation completion interrupt
Sensor A oscillation completion interrupt
Sensor B oscillation completion interrupt
Measurement counter overflow error interrupt
Time base counter overflow error interrupt

Figure 23.1.1 shows the RFC module configuration.

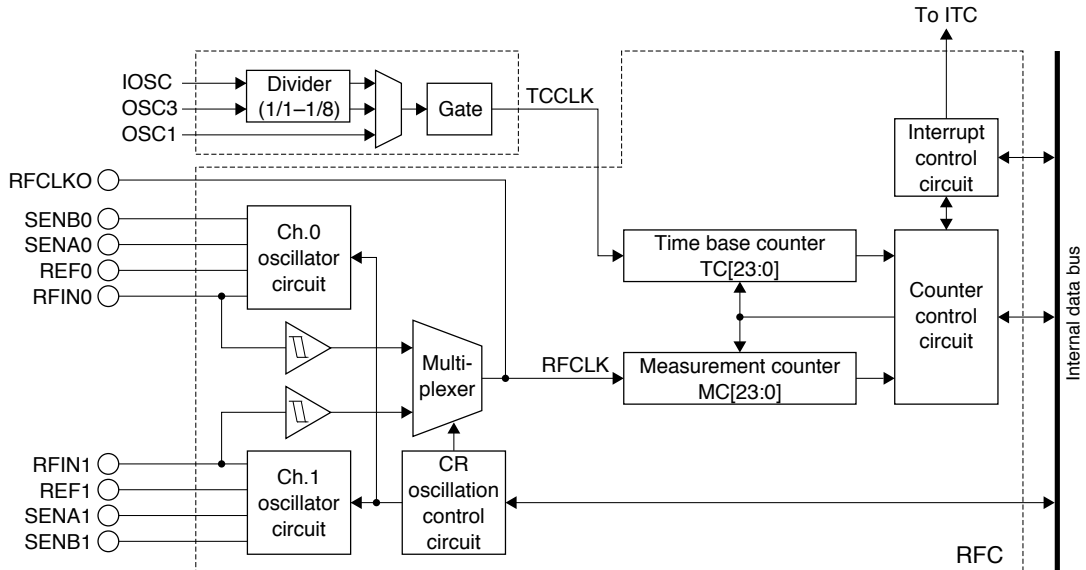


Figure 23.1.1 R/F Converter Configuration

The R/F converter converts the resistance or capacitance of the sensor connected into frequency (RFCLK) using the embedded CR oscillator circuit, and counts this frequency using the measurement counter for a set period of time to provide the digital value equivalent to the sensor value. The time base counter is also included for generating the measurement time by counting an internal clock (TCCLK). In addition to CR oscillation using a sensor (sensor oscillation), the R/F converter performs CR oscillation using a reference element with less variation in the characteristics due to external factors (reference oscillation). This removes error factors such as voltage fluctuations and unevenness in quality to realize precise measurements. The CR oscillator circuit supports AC driving and external clock input as well as general DC driving, allowing use of various sensors.

23.2 RFC Input/Output Pins

Table 23.2.1 lists the RFC input/output pins.

Table 23.2.1 List of R/F Converter Input/Output Pins

Pin name	I/O	Qty	Function
SENB0/SENB1	I/O	2	Sensor B oscillation control pin (see Note 1 below)
SENA0/SENA1	I/O	2	Sensor A oscillation control pin (see Note 1 below)
REF0/REF1	I/O	2	Reference oscillation control pin (see Note 1 below)
RFIN0/RFIN1	I/O	2	RFCLK input and oscillation control pin (see Note 2 below)
RFCLKO	O	1	RFCLK monitoring output pin Outputs RFCLK to monitor the oscillation frequency.

- Notes:**
1. The pins go to high impedance status when the port function is switched for the R/F converter.
 2. The RFINx pin goes to Vss level when the port function is switched for the R/F converter. A large current may flow through the RFINx pin if the pin is externally biased.

The R/F converter input/output pins are shared with I/O ports and are initially set as general-purpose I/O port pins. The pin functions must be switched using the port function select bits to use the general-purpose I/O port pins as R/F converter input/output pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

23.3 Operation Clock

The RFC module includes a clock source selector, dividers, and a gate circuit for controlling the operation clock.

Note: The operation clock (TCCLK) must be enabled before setting the R/F converter. Otherwise, the R/F converter cannot operate normally.

Clock source selection

Use CLKSRC[1:0]/RFC_CLK register to select the clock source from IOSC, OSC3, and OSC1.

Table 23.3.1 Clock Source Selection

CLKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x1)

Clock division ratio selection

When the clock source is OSC1

No division ratio needs to be selected when OSC1 is selected for the clock source. The OSC1 clock (typ. 32.768 kHz) is directly used as TCCLK.

When the clock source is IOSC or OSC3

When IOSC or OSC3 is selected for the clock source, use CLKDIV[1:0]/RFC_CLK register to select the division ratio.

Table 23.3.2 IOSC/OSC3 Division Ratio Selection

CLKDIV[1:0]	Division ratio
0x3	1/8
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

The time base counter uses the clock selected here for counting. Selecting a high-speed clock improves the conversion accuracy. However the clock must be selected so that the time base counter will not overflow in the

reference oscillation phase.

Clock enable

The clock supply is enabled with CLKEN/RFC_CLK register. The CLKEN default setting is 0, which stops the clock. Setting CLKEN to 1 feeds the clock generated as above to the RFC circuit. If no RFC operation is required, stop the clock to reduce current consumption.

23.4 Operating Modes

The R/F converter features three oscillation modes that use the RFC internal oscillator circuit and a mode for measuring an external input clock. Also it includes a CR oscillation clock (RFCLK) monitoring function and continuous oscillation function for measuring the oscillation clock frequency. Each channel can be set to a different mode.

23.4.1 Oscillation Mode

In measurements using the RFC internal oscillator circuit, operate the oscillator with the reference element and then the sensor for the same duration in time to count each oscillation frequency. The sensor value can be determined from the difference between the two count values by software. The R/F converter supports DC bias resistive or capacitive sensors and AC bias resistive sensors. The RFC internal oscillator circuit can operate in three oscillation modes corresponding to the sensor to be used that is specified by SMODE[1:0]/RFC_CTL register.

Table 23.4.1.1 Oscillation Mode Selection

SMODE[1:0]	Oscillation mode
0x3	Reserved
0x2	DC oscillation mode for measuring capacitive sensors
0x1	AC oscillation mode for measuring resistive sensors
0x0	DC oscillation mode for measuring resistive sensors

(Default: 0x0)

DC oscillation mode for measuring resistive sensors (SMODE[1:0] = 0x0, default)

This mode drives the oscillator with the reference resistor and resistive sensor by applying DC bias voltage. Select this mode when a DC bias resistive sensor is connected. This mode enables two resistive sensors to be connected to a channel. One reference resistor and one reference capacitor is also required.

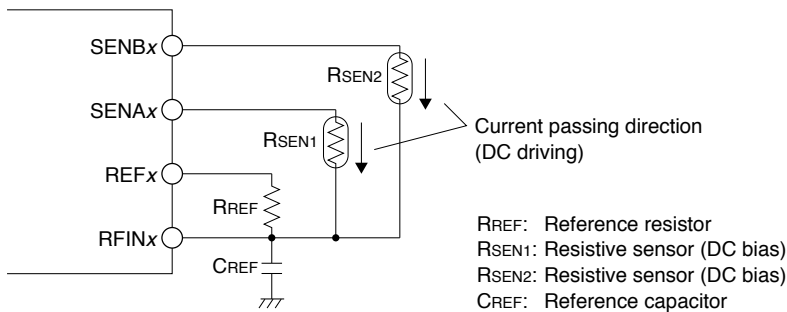


Figure 23.4.1.1 Connection Example in DC Oscillation Mode for Measuring Resistive Sensors

When one resistive sensor only is used, leave the unused pin open.

AC oscillation mode for measuring resistive sensors (SMODE[1:0] = 0x1)

This mode drives the oscillator with the reference resistor and resistive sensor by applying AC bias voltage. Select this mode when an AC bias resistive sensor is connected. This mode enables only one resistive sensor to be connected to a channel. One reference resistor and one reference capacitor is also required.

23 R/F CONVERTER (RFC)

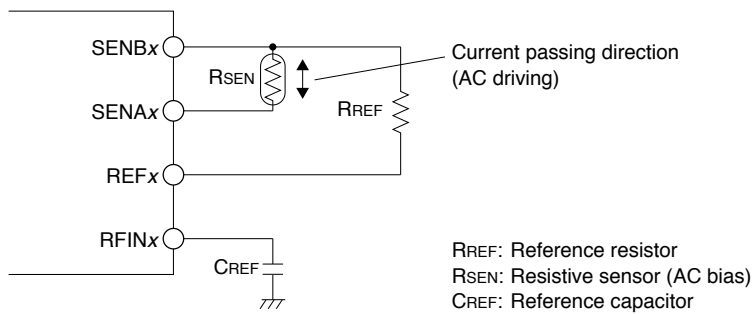


Figure 23.4.1.2 Connection Example in AC Oscillation Mode for Measuring Resistive Sensors

DC oscillation mode for measuring capacitive sensors (SMODE[1:0] = 0x2)

This mode drives the oscillator with the reference capacitor and capacitive sensor by applying DC bias voltage. Select this mode when a DC bias capacitive sensor is connected. This mode enables only one capacitive sensor to be connected to a channel. One reference resistor and one reference capacitor is also required.

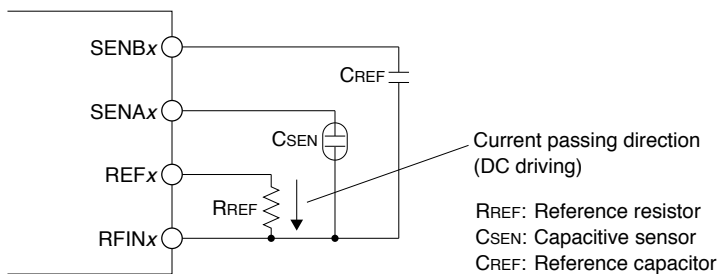


Figure 23.4.1.3 Connection Example in DC Oscillation Mode for Measuring Capacitive Sensors

23.4.2 External Clock Input Mode (Event Counter Mode)

This mode enables to input clocks/pulses from an external circuit such as an oscillator and count them same as those of internal oscillation clocks. It supports rectangular waves, triangular waves, and sign waves to be input. (For the threshold voltage of the Schmitt input buffer, see “Electrical Characteristics.”)

Setting EVTEN/RFC_CTL register to 1 enables this function. The measurement control procedure is the same as that when the internal oscillator circuit is used.

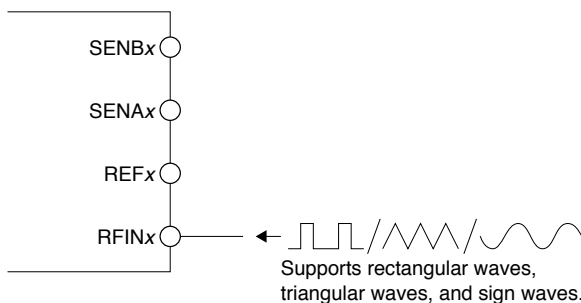


Figure 23.4.2.1 External Clock Input

The unused pins should be left open.

23.4.3 Functions for Measuring CR Oscillation Clock Frequency

CR Oscillation Clock (RFCLK) Monitoring Function

The CR oscillation clock (RFCLK) during converting can be output from the RFCLKO pin for monitoring. Use this output to measure the oscillation frequency.

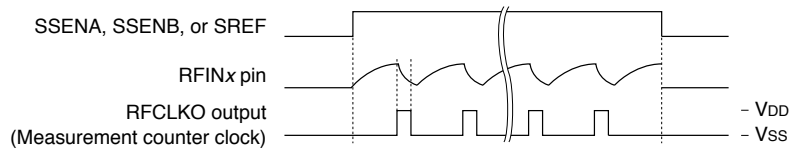


Figure 23.4.3.1 CR Oscillation Clock (RFCLK) Waveform

Continuous oscillation function

The CR oscillations by the sensor and reference element will automatically stop due to stop conditions. Setting 1 to CONEN/RFC_CTL register enables the continuous oscillation function and CR oscillation will continue until stopped by software. Using this function with the CR oscillation monitoring function helps easily measure the CR oscillation clock frequency.

23.5 RFC Counters

The R/F converter includes two kinds of counters: measurement counter (MC) counting the reference element and sensor oscillation clocks, and time base counter (TC) counting the TCCLK clock.

Measurement counter (MC)

The measurement counter is a 24-bit presettable up counter. Counting the reference oscillation clock and the sensor oscillation clock for the same duration in time using this counter minimizes errors caused by voltage, and unevenness of IC quality, as well as external parts and on-board parasitic elements. The counter values should be corrected via software after the reference and sensor oscillation are completed according to the sensor characteristics to determine the value being currently detected by the sensor.

Time base counter (TC)

The time base counter is a 24-bit presettable up/down counter. The time base counter counts up by TCCLK during reference oscillation to measure the reference oscillation time. During sensor oscillation, it counts down from the reference oscillation time and stops the sensor oscillation when it reaches 0x0. This means that the sensor oscillation time becomes equal to the reference oscillation time. The value counted during reference oscillation should be saved in the memory. It can be reused at the subsequent sensor oscillations omitting reference oscillations.

Counter initial value

To obtain the difference between the reference oscillation and sensor oscillation clock count values from the measurement counter simply, appropriate initial values must be set to the counters before starting reference oscillation and sensor oscillation.

Connecting the reference element and sensor with the same resistance/capacitance will result $\langle \text{Initial value} \rangle = \langle \text{Counter value at the end of sensor oscillation} \rangle$ (if no error introduced). Setting a small initial value to the measurement counter improves measurement accuracy. However, the measurement counter may overflow during sensor oscillation when the sensor value decreases below the reference element value (the measurement will be canceled). The initial value for the measurement counter should be determined taking the range of sensor value into consideration.

The time base counter should be cleared to 0x0 before starting reference oscillation.

23.6 Conversion Operations

The conversion operations by the R/F converter should be controlled in the following procedure regardless of the operating mode: initial settings, reference oscillation control, and sensor oscillation control. The R/F converter channels are controlled individually and both channels cannot operate simultaneously. This section describes these control procedure.

Although the following explanations assume that the internal oscillator circuit is used, the control procedures are the same even in external clock input mode. When the R/F converter is used in external clock input mode, select

which oscillation is performed either reference or sensor and determine the counter initial values depending on the purpose for using.

23.6.1 Initial Settings

Clock and pin configurations

- (1) Select the R/F converter operating clock (TCCLK) and enable the clock supply. (See Section 23.3.)
- (2) Configure the pins to be used for the R/F converter by switching from general-purpose input/output ports. See the “I/O Ports (P)” chapter.

R/F converter channel and mode settings

- (1) Set RFCEN/RFC_CTL register to 1 to enable the R/F converter.
- (2) Select the channel to perform conversion using CHSEL/RFC_CTL register. Setting CHSEL to 0 (default) selects Ch. 0 and setting 1 selects Ch.1.
- (3) Set the oscillation mode using SMODE[1:0]/RFC_CTL register. (See Section 23.4.1.)

23.6.2 Reference Oscillation Control

First, perform oscillation with the reference resistor/capacitor and obtain the time base counter value to perform sensor oscillation for the same period of time.

- (1) Set the initial value (0x0 - n) to MC[23:0]/RFC_MC(H/L) registers (measurement counter).
- (2) Set 0x0 to TC[23:0]/RFC_TC(H/L) registers (time base counter).
- (3) Reset the cause-of-interrupt flags OVTCIF and EREFIF in the RFC_IFLG register by writing 1.
- (4) Set SREF/RFC_TRG register to 1 to start reference oscillation.
The CR oscillator circuit starts oscillating with the reference resistor/capacitor and outputs the clock to the measurement counter. The measurement counter starts counting up using the CR oscillation clock from the initial value that has been set. The time base counter starts counting up using TCCLK from 0x0.

Note: For restrictions and precautions on control bit settings, see the descriptions in the “Control Register Details” section. The control bits may not be set to the desired values depending on conditions.

- (5) When the measurement counter or the time base counter overflows (0xfffff → 0x0), SREF is reset to 0 and the reference oscillation stops automatically.
- (6-1) The measurement counter overflow sets EREFIF to 1 indicating that the reference oscillation has been terminated normally. An interrupt can be generated at this point. Read the time base counter value (TC[23:0] = X) and store it to the memory by the interrupt handler routine. When this interrupt is not used, perform the same processing after checking if EREFIF has been set.
- (6-2) The time base counter overflow sets OVTCIF to 1 indicating that the reference oscillation has been terminated abnormally. An interrupt can be generated at this point. Handle this error in the interrupt handler routine. When this interrupt is not used, perform the same processing after checking if OVTCIF has been set.

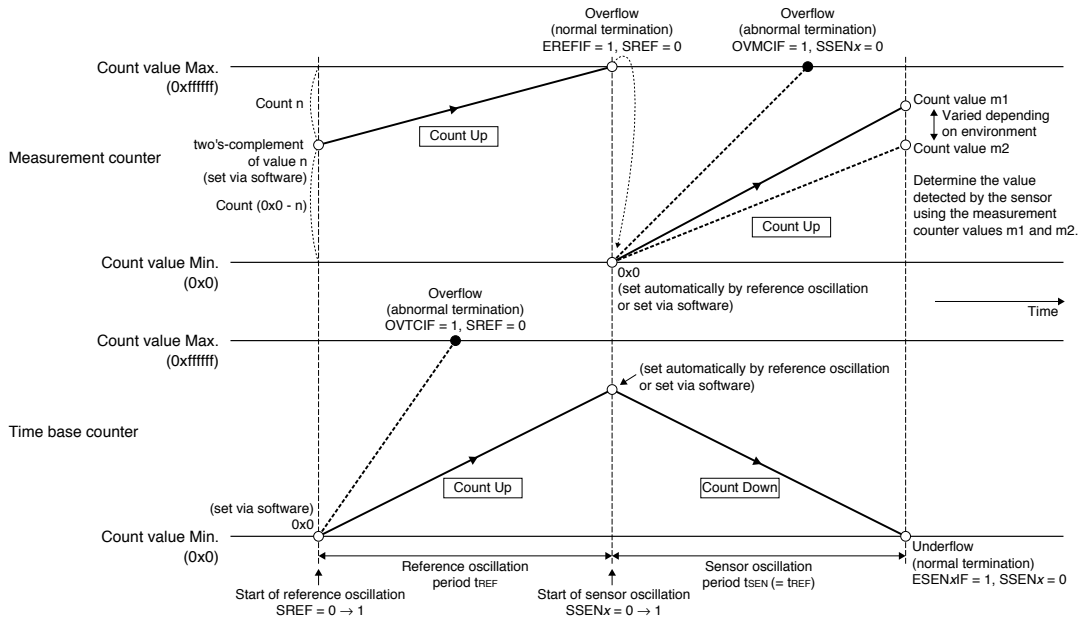


Figure 23.6.2.1 Counter Operations During Reference/Sensor Oscillation

23.6.3 Sensor Oscillation Control

Perform oscillation with the sensor for the period of time obtained by the time base counter in reference oscillation and count the oscillation clock by the measurement counter.

- (1) Initialize MC[23:0] (measurement counter) by writing 0x0. This can be omitted after a reference oscillation has completed.
- (2) Initialize TC[23:0] (time base counter) by writing the value (X) that has been counted in the time base counter during reference oscillation. This can be omitted after a reference oscillation has completed.
- (3) Reset the cause-of-interrupt flags OVMCIF, ESENBIF, and ESENAIF in the RFC_IFLG register by writing 1.
- (4) Set SSENA/RFC_TRG register (for sensor A) or SSENBRFC_TRG register (for sensor B) to 1 to start sensor oscillation.

The CR oscillator circuit starts oscillating with the sensor and outputs the clock to the measurement counter. The measurement counter starts counting up using the CR oscillation clock from 0x0. The time base counter starts counting down using TCCLK from the initial value (X) that has been set.

Note: For restrictions and precautions on control bit settings, see the descriptions in the “Control Register Details” section. The control bits may not be set to the desired values depending on conditions.

- (5) When the time base counter reaches 0x0 or the measurement counter overflows ($0xffff \rightarrow 0x0$), SSENA or SSENBR is reset to 0 and the sensor oscillation stops automatically.
- (6-1) The time base counter reached 0x0 sets ESENAIF (for sensor A) or ESENBIF (for sensor B) to 1 indicating that the sensor oscillation has been terminated normally. An interrupt can be generated at this point. Read the measurement counter value ($MC[23:0] = m$) and process the detection results by the interrupt handler routine. When this interrupt is not used, perform the same processing after checking if ESENAIF or ESENBIF has been set.
- (6-2) The measurement counter overflow sets OVMCIF to 1 indicating that the sensor oscillation has been terminated abnormally. An interrupt can be generated at this point. Handle this error in the interrupt handler routine. When this interrupt is not used, perform the same processing after checking if OVMCIF has been set.

23.6.4 Forced Termination

To abort reference oscillation or sensor oscillation, write 0 to SREF (reference oscillation), SSENA (sensor A oscillation), or SSENB (sensor B oscillation) in the RFC_TRG register used to start the oscillation. The counters maintain the value at they stopped, note, however, that the conversion results cannot be guaranteed if the oscillation is resumed. When resuming oscillation, initialize the counters.

23.6.5 Conversion Error

Performing reference oscillation and sensor oscillation with the same resistor and capacitor results $n \approx m$. The difference between n and m is a conversion error. The conversion error may be introduced caused by temperature, voltage, and unevenness of IC quality, as well as external parts and on-board parasitic elements. For sample errors, see “Electrical Characteristics.”

23.7 RFC Interrupts

The RFC module includes a function for generating the following five different types of interrupts.

- Reference oscillation completion interrupt
- Sensor A oscillation completion interrupt
- Sensor B oscillation completion interrupt
- Measurement counter overflow error interrupt
- Time base counter overflow error interrupt

The RFC module outputs one interrupt signal shared by the five above interrupt causes to the interrupt controller (ITC). Inspect the interrupt flag to determine the interrupt cause occurred.

Reference oscillation completion interrupt

To use this interrupt, set EREFIE/RFC_IMSK register to 1. If EREFIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When the measurement counter overflows and a reference oscillation is completed normally, the R/F converter sets EREFIF/RFC_IFLG register to 1. If reference oscillation completion interrupts are enabled (EREFIE = 1), an interrupt request is sent simultaneously to the ITC.

Sensor A oscillation completion interrupt

To use this interrupt, set ESENAIE/RFC_IMSK register to 1. If ESENAIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When the time base counter reaches 0x0 and a sensor A oscillation is completed normally, the R/F converter sets ESENAIF/RFC_IFLG register to 1. If sensor A oscillation completion interrupts are enabled (ESENAIE = 1), an interrupt request is sent simultaneously to the ITC.

Sensor B oscillation completion interrupt

To use this interrupt, set ESENBIE/RFC_IMSK register to 1. If ESENBIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When the time base counter reaches 0x0 and a sensor B oscillation is completed normally, the R/F converter sets ESENBIF/RFC_IFLG register to 1. If sensor B oscillation completion interrupts are enabled (ESENBIE = 1), an interrupt request is sent simultaneously to the ITC.

Measurement counter overflow error interrupt

To use this interrupt, set OVMCIE/RFC_IMSK register to 1. If OVMCIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When the measurement counter overflows and a sensor oscillation is terminated abnormally, the R/F converter sets OVMCIF/RFC_IFLG register to 1. If measurement counter overflow error interrupts are enabled (OVMCIE = 1), an interrupt request is sent simultaneously to the ITC.

Time base counter overflow error interrupt

To use this interrupt, set OVTCIE/RFC_IMSK register to 1. If OVTCIE is set to 0 (default), interrupt requests for this cause will not be sent to the ITC.

When the time base counter overflows and a reference oscillation is terminated abnormally, the R/F converter sets OVTCIF/RFC_IFLG register to 1. If time base counter overflow error interrupts are enabled (OVTCIE = 1), an interrupt request is sent simultaneously to the ITC.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

- Notes:**
- To prevent interrupt recurrences, the interrupt flag must be reset in the interrupt handler routine after an RFC interrupt has occurred. The interrupt flag is reset by writing 1.
 - To prevent unwanted interrupts, reset the interrupt flags before enabling interrupts with the interrupt enable bits.

23.8 Control Register Details

Table 23.8.1 List of RFC Registers

Address	Register name		Function
0x5067	RFC_CLK	RFC Clock Control Register	Selects the operating clock.
0x53a0	RFC_CTL	RFC Control Register	Controls R/F converter.
0x53a2	RFC_TRG	RFC Oscillation Trigger Register	Controls oscillations.
0x53a4	RFC_MCL	RFC Measurement Counter Low Register	Measurement counter data
0x53a6	RFC_MCH	RFC Measurement Counter High Register	
0x53a8	RFC_TCL	RFC Time Base Counter Low Register	Time base counter data
0x53aa	RFC_TCH	RFC Time Base Counter High Register	
0x53ac	RFC_IMSK	RFC Interrupt Mask Register	Enables/disables interrupts.
0x53ae	RFC_IFLG	RFC Interrupt Flag Register	Indicates/resets interrupt occurrence status.

The R/F converter registers are described in detail below.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

RFC Clock Control Registers (RFC_CLK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RFC Clock Control Register (RFC_CLK)	0x5067 (8 bits)	D7–6	–	reserved	–	–	–	0 when being read.
		D5–4	CLKDIV [1:0]	RFC clock division ratio select	CLKDIV[1:0] Division ratio	0x0	R/W	When the clock source is IOSC or OSC3
					0x3	1/8		
					0x2	1/4		
					0x1	1/2		
		D3–2	CLKSRC [1:0]	RFC clock source select	CLKSRC[1:0] Clock source	0x0	R/W	
0x3	reserved							
		D1	–	reserved	–	–	0 when being read.	
		D0	CLKEN	RFC clock enable	1 Enable 0 Disable	0	R/W	

D[7:6] Reserved

D[5:4] CLKDIV[1:0]: RFC Clock Division Ratio Select Bits

Selects the division ratio for generating the TCCLK clock when IOSC or OSC3 is used as the clock source.

Table 23.8.2 IOSC/OSC3 Division Ratio Selection

CLKDIV[1:0]	Division ratio
0x3	1/8
0x2	1/4
0x1	1/2
0x0	1/1

(Default: 0x0)

D[3:2] CLKSRC[1:0]: RFC Clock Source Select Bits

Selects the count clock source.

Table 23.8.3 RFC Clock Source Selection

CLKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3
0x1	OSC1
0x0	IOSC

(Default: 0x1)

D1 Reserved**D0 CLKEN: Clock Enable Bit**

Enables or disables the TCCLK clock supply.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

The CLKEN default setting is 0, which disables the clock supply. Setting CLKEN to 1 sends the clock selected to the R/F converter.

RFC Control Register (RFC_CTL)

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks	
RFC Control Register (RFC_CTL)	0x53a0 (16 bits)	D15–8	–	reserved	–		–	–	0 when being read.	
		D7	CONEN	Continuous oscillation enable	1	Enable	0	Disable	0	R/W
		D6	EVTEN	Event counter mode enable	1	Enable	0	Disable	0	R/W
		D5–4	SMODE[1:0]	Sensor oscillation mode select	SMODE[1:0]		Sensor		0x0	R/W
					0x3	reserved				
					0x2	DC capacitive				
					0x1	AC resistive				
					0x0	DC resistive				
		D3–2	–	reserved	–		–	–	0 when being read.	
		D1	CHSEL	Conversion channel select	1	Ch.1	0	Ch.0	0	R/W
		D0	RFCEN	RFC enable	1	Enable	0	Disable	0	R/W

D[15:8] Reserved**D7 CONEN: Continuous Oscillation Enable Bit**

Enables continuous oscillation by disabling the automatic CR oscillation stop function.

1 (R/W): Continuous oscillation enabled

0 (R/W): Continuous oscillation disabled (default)

Setting 1 to CONEN disables the reference oscillation/sensor oscillation stop conditions so that the CR oscillator will continue oscillating. Set SREF (reference oscillation), SSENA (sensor A oscillation), or SSENB (sensor B oscillation) in the RFC_TRG register to 1 to start oscillation even in this mode, and set to 0 to stop oscillation.

Using this function with the CR oscillation monitoring function helps easily measure the CR oscillation clock frequency.

D6 EVTEN: Event Counter Mode Enable Bit

Enables external clock input mode (event counter mode).

1 (R/W): External clock input mode

0 (R/W): Normal mode (default)

Setting EVTEN to 1 enables the external clock input to the RFINx pin. SREF (reference oscillation), SSENA (sensor A oscillation), or SSENB (sensor B oscillation) should be used to control starting oscillation (starting conversion) to perform converting operation even in this mode.

Note: Do not input an external clock before setting EVTEN to 1. The RFINx pin is pulled down to Vss when the pin function is switched for the R/F converter.

D[5:4] SMODE[1:0]: Sensor Oscillation Mode Select Bits

Selects an oscillation mode.

Table 23.8.4 Oscillation Mode Selection

SMODE[1:0]	Oscillation mode
0x3	Reserved
0x2	DC oscillation mode for measuring capacitive sensors
0x1	AC oscillation mode for measuring resistive sensors
0x0	DC oscillation mode for measuring resistive sensors

(Default: 0x0)

For more information on the oscillation mode, see Section 23.4.1.

D[3:2] Reserved**D1 CHSEL: Conversion Channel Select Bit**

Selects the channel to perform conversion.

1 (R/W): Ch.1

0 (R/W): Ch.0 (default)

The D[7:4] settings in this register and oscillation control using the RFC_TRG register are effective only for the channel specified by CHSEL.

D0 RFCEN: RFC Enable Bit

Enables or disables the R/F converter.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting RFCEN to 1 enables the R/F converter to start converting operations. When RFCEN is 0, manipulations of the RFC_TRG register for oscillation control are ineffective.

RFC Oscillation Trigger Register (RFC_TRG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RFC Oscillation Trigger Register (RFC_TRG)	0x53a2 (16 bits)	D15-3	–	reserved	–	–	–	0 when being read.
		D2	SSENB	Sensor B oscillation control/status	1 Start/Run 0 Stop	0	R/W	
		D1	SSENA	Sensor A oscillation control/status	1 Start/Run 0 Stop	0	R/W	
		D0	SREF	Reference oscillation control/status	1 Start/Run 0 Stop	0	R/W	

D[15:3] Reserved**D2 SSENB: Sensor B Oscillation Control/Status Bit**

Controls CR oscillation for sensor B. This bit also indicates the CR oscillation status.

1 (W): Start oscillation

0 (W): Stop oscillation

1 (R): Being oscillated

0 (R): Stopped (default)

Sensor B cannot be used in AC oscillation mode for resistive sensors and DC oscillation mode for capacitive sensors.

D1 SSENA: Sensor A Oscillation Control/Status Bit

Controls CR oscillation for sensor A. This bit also indicates the CR oscillation status.

1 (W): Start oscillation

0 (W): Stop oscillation

1 (R): Being oscillated

0 (R): Stopped (default)

D0 SREF: Reference Oscillation Control/Status Bit

Controls CR oscillation for the reference element. This bit also indicates the CR oscillation status.

1 (W): Start oscillation

0 (W): Stop oscillation

1 (R): Being oscillated

0 (R): Stopped (default)

23 R/F CONVERTER (RFC)

- Notes:**
- SREF, SSENA, and SSENB are all ineffective when RFCEN/RFC_CTL register is 0 (converting operation disabled).
 - Writing 1 to SSENB does not start oscillation when SMODE[1:0]/RFC_CTL register is 0x1 (AC oscillation mode for resistive sensors) or 0x2 (DC oscillation mode for capacitive sensors).
 - When writing 1 to SREF, SSENA, or SSENB to start oscillation, be sure to avoid that more than one bit are set to 1.
 - Be sure to reset the interrupt flags in the RFC_IFLG register (EREFIF, ESENAIF, ESENBIF, OVMCIF, and OVTCIF) before starting oscillation using SREF, SSENA, and SSENB.

RFC Measurement Counter Low and High Registers (RFC_MCL, RFC_MCH)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RFC Measurement Counter Low Register (RFC_MCL)	0x53a4 (16 bits)	D15–0	MC[15:0]	Measurement counter low-order 16-bit data	0x0–0xffff	0x0	R/W	
RFC Measurement Counter High Register (RFC_MCH)	0x53a6 (16 bits)	D15–8 D7–0	– MC[23:16]	reserved Measurement counter high-order 8-bit data	– 0x0–0xff	– 0x0	– R/W	0 when being read.

D[7:0]/RFC_MCH, D[15:0]/RFC_MCL

MC[23:0]: Measurement Counter Bits

Measurement counter data can be read and written to. (Default: 0x0)

Note: The measurement counter must be set from the low-order value (MC[15:0]/RFC_MCL register) first. The counter may not be set to the correct value if the high-order value (MC[23:16]/RFC_MCH register) is written first.

RFC Time Base Counter Low and High Registers (RFC_TCL, RFC_TCH)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RFC Time Base Counter Low Register (RFC_TCL)	0x53a8 (16 bits)	D15–0	TC[15:0]	Time base counter low-order 16-bit data	0x0–0xffff	0x0	R/W	
RFC Time Base Counter High Register (RFC_TCH)	0x53aa (16 bits)	D15–8 D7–0	– TC[23:16]	reserved Time base counter high-order 8-bit data	– 0x0–0xff	– 0x0	– R/W	0 when being read.

D[7:0]/RFC_TCH, D[15:0]/RFC_TCL

TC[23:0]: Time Base Counter Bits

Time base counter data can be read and written to. (Default: 0x0)

Note: The time base counter must be set from the low-order value (TC[15:0]/RFC_TCL register) first. The counter may not be set to the correct value if the high-order value (TC[23:16]/RFC_TCH register) is written first.

RFC Interrupt Mask Register (RFC_IMSK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
RFC Interrupt Mask Register (RFC_IMSK)	0x53ac (16 bits)	D15–5	–	reserved	–	–	–	0 when being read.
		D4	OVTCIE	TC overflow error interrupt enable	1 Enable	0 Disable	0	R/W
		D3	OVMCIE	MC overflow error interrupt enable	1 Enable	0 Disable	0	R/W
		D2	ESENBIE	Sensor B oscillation completion interrupt enable	1 Enable	0 Disable	0	R/W
		D1	ESENAIE	Sensor A oscillation completion interrupt enable	1 Enable	0 Disable	0	R/W
		D0	EREFIE	Reference oscillation completion interrupt enable	1 Enable	0 Disable	0	R/W

D[15:5] Reserved

D4 OVTICIE: TC Overflow Error Interrupt Enable Bit

Enables or disables time base counter overflow error interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D3 OVMCIE: MC Overflow Error Interrupt Enable Bit

Enables or disables measurement counter overflow error interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D2 ESENBIE: Sensor B Oscillation Completion Interrupt Enable Bit

Enables or disables sensor B oscillation completion interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D1 ESENAIE: Sensor A Oscillation Completion Interrupt Enable Bit

Enables or disables sensor A oscillation completion interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

D0 EREFIE: Reference Oscillation Completion Interrupt Enable Bit

Enables or disables reference oscillation completion interrupts.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

RFC Interrupt Flag Register (RFC_IFLG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
RFC Interrupt Flag Register (RFC_IFLG)	0x53ae (16 bits)	D15-5	–	reserved		–	–	0 when being read.	
		D4	OVTICIF	TC overflow error interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
		D3	OVMCIF	MC overflow error interrupt flag			0	R/W	
		D2	ESENBIF	Sensor B oscillation completion interrupt flag			0	R/W	
		D1	ESENAIF	Sensor A oscillation completion interrupt flag			0	R/W	
		D0	EREFIF	Reference oscillation completion interrupt flag			0	R/W	

D[15:5] Reserved**D4 OVTICIF: TC Overflow Error Interrupt Flag Bit**

Indicates the time base counter overflow error interrupt cause occurrence status.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

OVTICIF is set to 1 when a reference oscillation is terminated abnormally due to time base counter overflow. OVTICIF is reset to 0 by writing 1.

D3 OVMCIF: MC Overflow Error Interrupt Flag Bit

Indicates the measurement counter overflow error interrupt cause occurrence status.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

OVMCIF is set to 1 when a sensor oscillation is terminated abnormally due to measurement counter overflow. OVMCIF is reset to 0 by writing 1.

D2 ESENBIF: Sensor B Oscillation Completion Interrupt Flag Bit

Indicates the sensor B oscillation completion interrupt cause occurrence status.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

ESENBIF is set to 1 when the time base counter reaches 0x0 and a sensor B oscillation is completed normally. ESENBIF is reset to 0 by writing 1.

D1 ESENAIF: Sensor A Oscillation Completion Interrupt Flag Bit

Indicates the sensor A oscillation completion interrupt cause occurrence status.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

ESENAIF is set to 1 when the time base counter reaches 0x0 and a sensor A oscillation is completed normally. ESENAIF is reset to 0 by writing 1.

D0 EREFIF: Reference Oscillation Completion Interrupt Flag Bit

Indicates the reference oscillation completion interrupt cause occurrence status.

- 1 (R): Cause of interrupt has occurred
- 0 (R): No cause of interrupt has occurred (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

EREFIF is set to 1 when the measurement counter overflows and a reference oscillation is completed normally. EREFIF is reset to 0 by writing 1.

24 Supply Voltage Detector (SVD)

24.1 SVD Module Overview

The S1C17706 includes an SVD (supply voltage detector) circuit to monitor the power voltage supplied to the V_{DD} pin. It generates an interrupt when the power supply voltage drops below the detection level set with software. The detection results can also be read via software.

The following shows the features of the SVD module:

- Power supply voltage to be detected: V_{DD}
- Detection voltage levels: 15 levels (1.8 V to 3.2 V)
- Interrupt supported: 1 system (power supply voltage drop detection interrupt)
- Intermittent operation supported: 3 cycles selecting, Detection result times count function
- Voltage detection reset function

Figure 24.1.1 shows the SVD configuration.

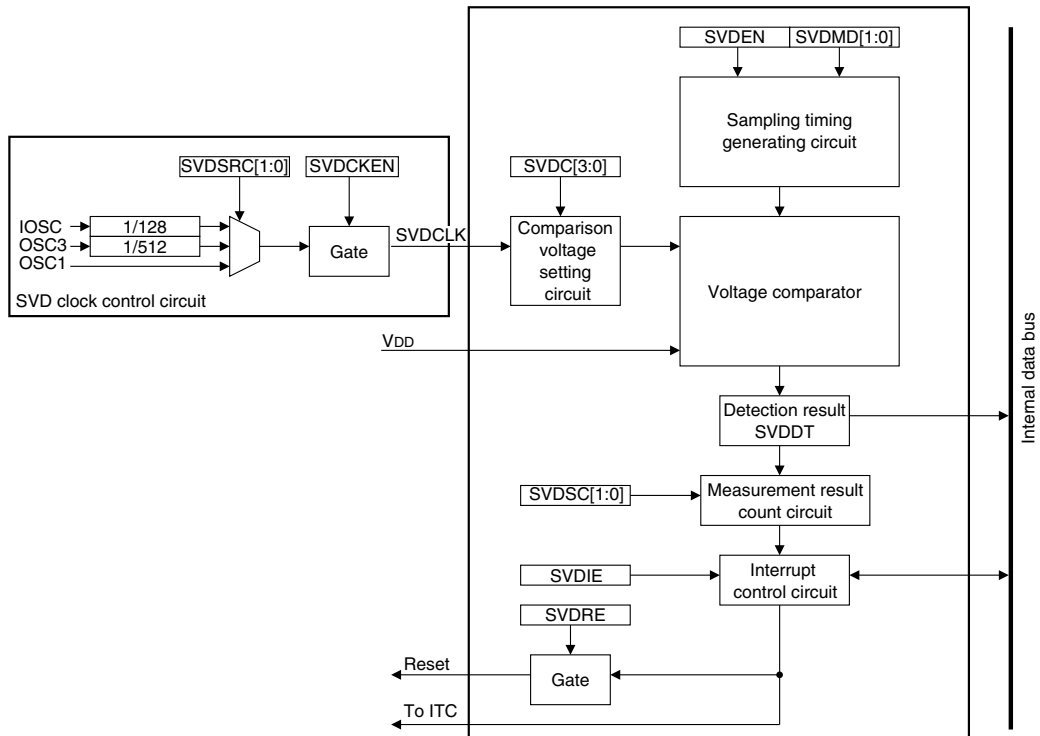


Figure 24.1.1 SVD Configuration

24.2 Operating Clock

The SVD module includes a clock source selector, dividers, and a gate circuit for controlling the operation clock.

Clock selection

Use CLKSRC[1:0]/SVD_CLK register to select the clock source from IOOSC, OSC3, and OSC1.

24 SUPPLY VOLTAGE DETECTOR (SVD)

Table 24.2.1 Clock Source Selection

SVDSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3/512
0x1	OSC1
0x0	IOSC/128

(Default: 0x1)

When OSC1 is selected as the clock source, the OSC1 clock (typ. 32.768 kHz) is directly used as SVDCLK.

When IOSC is selected as the clock source, SVDCLK is generated by dividing the IOSC clock by 128.

When OSC3 is selected as the clock source, SVDCLK is generated by dividing the OSC3 clock by 512.

When the clock source is IOSC or OSC3 and when IOSC or OSC3 is selected for the clock source, set SVDCLK to become around 32 kHz.

Clock enable

The clock supply is enabled with CLKEN/SVD_CLK register. The CLKEN default setting is 0, which stops the clock. Setting CLKEN to 1 feeds the clock selected to the SVD circuit. If no SVD operation is required, stop the clock to reduce current consumption.

If SVDCLK is not supplied, the SVD circuit cannot detect voltage levels. However, the SVD control registers can be accessed even if SVDCLK is stopped.

24.3 Comparison Voltage Setting

The SVD circuit compares the power supply voltage (V_{DD}) against the comparison voltage set by software and outputs results indicating whether the power supply voltage exceeds this comparison voltage. The comparison voltage can be selected from among the 15 levels listed in Table 24.3.1 with the SVDC[3:0]/SVD_CMP register.

Table 24.3.1 Comparison Voltage Settings

SVDC[3:0]	Comparison voltage
0xf	3.2 V
0xe	3.1 V
0xd	3.0 V
0xc	2.9 V
0xb	2.8 V
0xa	2.7 V
0x9	2.6 V
0x8	2.5 V
0x7	2.4 V
0x6	2.3 V
0x5	2.2 V
0x4	2.1 V
0x3	2.0 V
0x2	1.9 V
0x1	1.8 V
0x0	Reserved

(Default: 0x0)

24.4 SVD Control

Power supply voltage detection using the SVD circuit is initiated by writing 1 to SVDEN/SVD_EN register and is stopped by writing 0.

The results can be read out from the SVDDT/SVD_RSLT register.

The detection results and SVDDT readings are as follows.

- When power supply voltage (V_{DD}) \geq comparison voltage: SVDDT = 0
- When power supply voltage (V_{DD}) $<$ comparison voltage: SVDDT = 1

Notes: • An SVD circuit-enable response time is required to obtain stable detection results after SVDEN is altered from 0 to 1. Also when SVDC[3:0] is altered, an SVD circuit response time is required to obtain stable detection results. For these response times, see “Electrical Char-

acteristics.”

- Operating the SVD circuit increases current consumption. If power supply voltage detection is not required, stop SVD operations by setting SVDEN to 0.

24.5 Intermittent Operation

The S1C17706 SVD circuit has intermittent operation functionality. If, in the intermittent operation mode, SVD is ON and the voltage is measured within a certain interval, the detected voltages are counted up, and the measurement result is judged. The enable and the operation time of the intermittent operation mode can be selected using the SVDMD[1:0]/SVD_EN register from any cycles of three types of Table 24.5.1 .

Also, in the intermittent operation mode, any of three count numbers of Table 24.5.2 can be selected the detection result of the continuous judgement numbers by the SVDSC[1:0]/SVD_CMP register. When the power supply voltage drop detection interrupt flag matches this judgement numbers, the flag is set to 1.

Table 24.5.1 Intermittent Operation Mode Cycles Selection

SVDMD[1:0]	Intermittent operation mode
0x3	SVDCLK/512
0x2	SVDCLK/256
0x1	SVDCLK/128
0x0	Continuous

(Default: 0x0)

Table 24.5.2 Selection of Detection Result Judgement Times in Intermittent Operation Mode

SVDSC[1:0]	Detection result judgement
0x3	Continuous 4 times detection
0x2	Continuous 3 times detection
0x1	Continuous 2 times detection
0x0	Continuous 1 time detection

(Default: 0x0)

Note: If SVDEN/SVD_EN is set to 0 in the intermittent operation mode, the SVDDT/SVD_RSLT result is undefined.

24.6 SVD Interrupt and Reset

The SVD module includes a function for generating interrupts and the software reset when power supply voltage drops are detected. These functions can be used for the display control and heavy load protection in a low battery level.

Power supply voltage drop detection interrupt

This cause of interrupt is generated when the power supply voltage (V_{DD}) detected value drops below the comparison voltage while SVD is operating (SVDEN = 1). It sets the interrupt flag SVDIF/SVD_IFLG register in the SVD module to 1. Once set, SVDIF is not reset even if the power supply voltage subsequently returns to a value exceeding the comparison voltage. Therefore, if the interrupt occurs due to a temporal voltage drop, read SVDDT in the interrupt routine to check the value.

To use this interrupt, set SVDIE/SVD_IMSK register to 1. When SVDIE is set to 0 (default), interrupt requests for this cause will not be sent to the interrupt controller (ITC).

If SVDIF is set to 1 while SVDIE is set to 1 (interrupt enabled), the SVD module outputs an interrupt request to the ITC. An interrupt is generated if the ITC and S1C17 Core interrupt conditions are satisfied.

For more information on interrupt processing, see the “Interrupt Controller (ITC)” chapter.

Voltage detection reset function

The SVD module is generated the reset when the power supply voltage drop interrupt flag is 1 . To use this reset function, set the SVDRE[3:0]/SVD_EN register = 0b1010.

When a reset is generated by the supply voltage detector, the SVD register bits other than SVD_CLK are not initialized. For proper operation after restored from the reset, therefore, the SVD_CLK register must be config-

24 SUPPLY VOLTAGE DETECTOR (SVD)

ured.

- Notes:**
- To prevent interrupt recurrences, the SVD module interrupt flag SVDIF must be reset in the interrupt handler routine after an SVD interrupt has occurred.
 - To prevent unwanted interrupts, SVDIF should be reset before enabling SVD interrupts with SVDIE.
 - The reset will be generated when the flag is set to 1 if SVDRE[3:0]/SVD_EN register = 0b1010 even if SVDEN/SVDEN register = 0.
 - After restored from the reset, be sure to disable SVDRE[3:0]/SVD_EN before reconfiguration.

24.7 Control Register Details

Table 24.7.1 List of SVD Registers

Address	Register name		Function
0x5066	SVD_CLK	SVD Clock Control Register	Selects the operating clock.
0x5100	SVD_EN	SVD Enable Register	Enables/disables the SVD operation.
0x5101	SVD_CMP	SVD Comparison Voltage Register	Sets the comparison voltage.
0x5102	SVD_RSLT	SVD Detection Result Register	Voltage detection results
0x5103	SVD_IMSK	SVD Interrupt Mask Register	Enables/disables interrupts.
0x5104	SVD_IFLG	SVD Interrupt Flag Register	Indicates/resets interrupt occurrence status.

The SVD module registers are described in detail below. These are 8-bit registers.

Note: When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.

SVD Clock Control Register (SVD_CLK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SVD Clock Control Register (SVD_CLK)	0x5066 (8 bits)	D7-4	–	reserved	–	–	–	0 when being read.	
		D3-2	CLKSRC [1:0]	SVD clock source select	CLKSRC[1:0]	Clock source	0x1	R/W	
					0x3	reserved			
					0x2	OSC3/512			
					0x1	OSC1			
0x0	IOSC/128								
		D1	–	reserved	–	–	0 when being read.		
		D0	CLKEN	SVD clock enable	1 Enable 0 Disable	0	R/W		

D[7:4] Reserved

D[3:2] CLKSRC[1:0]: SVD Clock Source Select Bits

Selects the clock source for the SVD circuit.

Table 24.7.2 SVD Clock Source Selection

CLKSRC[1:0]	Clock source
0x3	Reserved
0x2	OSC3/512
0x1	OSC1
0x0	IOSC/128

(Default: 0x1)

When OSC1 is selected as the clock source, the OSC1 clock (typ. 32.768 kHz) is directly used as SVD-CLK. When IOSC is selected as the clock source, SVDCLK is generated by dividing the IOSC clock by 128. When OSC3 is selected as the clock source, SVDCLK is generated by dividing the OSC3 clock by 512.

D1 Reserved

D0 CLKEN: SVD Clock Enable Bit

Enables or disables the operation clock supply to the SVD circuit.

1 (R/W): Enabled (on)

0 (R/W): Disabled (off) (default)

The CLKEN default setting is 0, which disables the clock supply. Setting CLKEN to 1 feeds the clock

selected to the SVD circuit.

SVD Enable Register (SVD_EN)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks				
SVD Enable Register (SVD_EN)	0x5100 (8 bits)	D7-4	SVDRE[3:0]	SVD reset enable	1010	Enable	Others	Disable	0	R/W		
		D3	–	reserved		–				0	R	0 when being read.
		D2-1	SVDMD[1:0]	SVD intermittent mode	SVDC[3:0]	Time	0	R/W				
					0x3	SVDCLK/512 (about 16msec)						
					0x2	SVDCLK/256 (about 8msec)						
0x1	SVDCLK/128 (about 4msec)											
	0x0	continuous										
	D0	SVDEN	SVD enable	1	Enable	0	Disable	0	R/W			

D[7:4] SVDRE: SVD Reset Enable Bits

Enables or disables the SVD reset.

1010 (R/W): Enabled

Others (R/W): Disabled (default)

D3 Reserved

D[2:1] SVDMD: SVD Intermittent Mode Bits

Specify the operation mode and an operation interval in the intermittent operation mode.

Table 24.7.3 Intermittent Operation Times Settings

SVDC[3:0]	Operation mode	Intermittent operation time
0x3	Intermittent operation mode	SVDCLK/512
0x2	Intermittent operation mode	SVDCLK/256
0x1	Intermittent operation mode	SVDCLK/128
0x0 (default)	Continuous operation mode	–

D0 SVDEN: SVD Enable Bit

Enables or disables SVD operations.

1 (R/W): Enabled

0 (R/W): Disabled (default)

Setting SVDEN to 1 initiates power supply voltage detection; setting to 0 stops detection.

- Notes:**
- An SVD circuit-enable response time is required to obtain stable detection results after SVDEN is altered from 0 to 1. Also when SVDC[3:0] is altered, an SVD circuit response time is required to obtain stable detection results. For these response times, see “Electrical Characteristics.”
 - Operating the SVD circuit increases current consumption. If power supply voltage detection is not required, stop SVD operations by setting SVDEN to 0.

SVD Comparison Voltage Register (SVD_CMP)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SVD Comparison Voltage Register (SVD_CMP)	0x5101 (8 bits)	D7-6	--	reserved	--	0	R	0 when being read.	
		D5-4	SVDC[1:0]	SVD sampling results count	SVDC[1:0]	Times	0	R/W	When SVDMD = 0, settings are invalid.
					0x3	8 times in a row			
					0x2	4 times in a row			
D3-0	SVDC[3:0]	SVD compare voltage	SVDC[3:0]	Voltage	0	R/W			
			0xf	High voltage					
			0x0	Low voltage					

D[7:6] Reserved

D[5:4] SVDCS: SVD Detection Results Count Bits

Sets a number of times of the continuous logical 1 state in the detection result that causes the SVDIF/SWD_IFG register to be set to 1 when the intermittent operation mode.

Table 24.7.4 Selection of Detection Result Judgement Times in Intermittent Operation Mode

SVDCS[1:0]	Detection result judgement
0x3	Continuous 4 times detection
0x2	Continuous 3 times detection
0x1	Continuous 2 times detection
0x0	Continuous 1 time detection

(Default: 0x0)

D[3:0] SVDC[3:0]: SVD Comparison Voltage Select Bits

Selects one of 15 comparison voltages for detecting voltage drops.

Table 24.7.5 Comparison Voltage Settings

SVDC[3:0]	Comparison voltage
0xf	3.2 V
0xe	3.1 V
0xd	3.0 V
0xc	2.9 V
0xb	2.8 V
0xa	2.7 V
0x9	2.6 V
0x8	2.5 V
0x7	2.4 V
0x6	2.3 V
0x5	2.2 V
0x4	2.1 V
0x3	2.0 V
0x2	1.9 V
0x1	1.8 V
0x0	Reserved

(Default: 0x0)

The SVD circuit compares the power supply voltage (V_{DD}) against the comparison voltage set by SVDC[3:0], and outputs results indicating whether the power supply voltage exceeds this comparison voltage.

SVD Detection Result Register (SVD_RSLT)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
SVD Detection Result Register (SVD_RSLT)	0x5102 (8 bits)	D7-1	--	reserved	--	0	R	0 when being read.
		D0	SVDDT	SVD detection	--	×	R	

D[7:1] Reserved

D0 SVDDT: SVD Detection Result Bit

Indicates the power supply voltage detection results.

1 (R): Power supply voltage (V_{DD}) < comparison voltage

0 (R): Power supply voltage (V_{DD}) \geq comparison voltage

The SVD circuit compares the power supply voltage (V_{DD}) against the voltage set in SVDC[3:0]/SVD_CMP register while SVDEN/SVD_EN register = 1. The current power supply voltage status can be checked by reading SVDDT.

SVD Interrupt Mask Register (SVD_IMSK)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
SVD Interrupt Mask Register (SVD_IMSK)	0x5103 (8 bits)	D7-1	–	reserved	–	0	R	0 when being read.
		D0	SVDIE	SVD interrupt mask	–	0	R/W	

D[7:1] Reserved

D0 SVDIE: SVD Interrupt Enable Bit

Enables or disables interrupts when a power supply voltage drop is detected.

1 (R/W): Interrupt enabled

0 (R/W): Interrupt disabled (default)

Setting SVDIE to 1 enables SVD interrupt requests to the ITC; setting to 0 disables interrupts.

SVD Interrupt Flag Register (SVD_IFLG)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
SVD Interrupt Flag Factor Register (SVD_IFLG)	0x5104 (8 bits)	D7-1	–	reserved	–	0	R	0 when being read.
		D0	SVDIF	SVD interrupt factor flag	–	0	R/W	Reset by writing 1.

D[7:1] Reserved

D0 SVDIF: SVD Interrupt Flag Bit

Indicates the power supply voltage drop detection interrupt cause occurrence status.

1 (R): Cause of interrupt has occurred

0 (R): No cause of interrupt has occurred (default)

1 (W): Flag is reset

0 (W): Ignored

SVDIF is the SVD module interrupt flag that is set to 1 when a power supply voltage drop is detected. SVDIF is reset to 0 by writing 1.

25 On-chip Debugger (DBG)

25.1 Resource Requirements and Debugging Tools

Debugging work area

Debugging requires a 64-byte debugging work area. For more information on the work area location, see the “Memory Map, Bus Control” chapter.

The start address for this debugging work area can be read from the DBRAM register (0xffff90).

Debugging tools

Debugging involves connecting ICDmini (S5U1C17001H) to the S1C17706 debug pins and inputting the debug instruction from the debugger on the personal computer.

The following tools are required:

- S1C17 Family In-Circuit Debugger ICDmini (S5U1C17001H)
- S1C17 Family C compiler package (e.g., S5U1C17001C)

Debug pins

The following debug pins are used to connect ICDmini (S5U1C17001H).

Table 25.1.1 List of Debug Pins

Pin name	I/O	Qty	Function
DCLK	O	1	On-chip debugger clock output pin Outputs a clock to the ICDmini (S5U1C17001H).
DSIO	I/O	1	On-chip debugger data input/output pin Used to input/output debugging data and input the break signal.
DST2	O	1	On-chip debugger status signal output pin Outputs the processor status during debugging.

The on-chip debugger input/output pins (DCLK, DST2, DSIO) are shared with I/O ports and are initially set as the debug pins. If the debugging function is not used, these pins can be switched using the port function select bits to enable use as general-purpose I/O port pins.

For detailed information on pin function switching, see the “I/O Ports (P)” chapter.

25.2 Debug Break Operation Status

The S1C17 Core enters debug mode when the brk instruction is executed or a debug interrupt is generated by a break signal (Low) input to the DSIO pin. This state persists until the ret instruction is executed. During this time, hardware interrupts and NMIs are disabled.

The default setting halts peripheral circuit operations. This setting can be modified even when debugging is underway.

The peripheral circuits that operate with PCLK will continue running in debug mode by setting DBRUN1/MISC_DMODE1 register to 1. Setting DBRUN1 to 0 (default) will stop these peripheral circuits in debug mode.

The peripheral circuits that operate with a clock other than PCLK will continue running in debug mode by setting DBRUN2/MISC_DMODE2 register to 1. Setting DBRUN2 to 0 (default) will stop these peripheral circuits in debug mode.

Some peripheral circuits, such as SPI, I2CS, and T16A, that run with an external input clock will not stop operating even if the C17 Core enters debug mode.

The LCD driver continues the operating status at occurrence of the debug interrupt.

25.3 Additional Debugging Function

The S1C17706 expands the following on-chip debugging functions of the S1C17 Core.

Branching destination in debug mode

When a debug interrupt is generated, the S1C17 Core enters debug mode and branches to the debug processing routine. In this process, the S1C17 Core is designed to branch to address 0xffffc00. In addition to this branching destination, the S1C17706 also allows designation of address 0x0 (beginning address of the internal RAM) as the branching destination when debug mode is activated. The branching destination address is selected using DBADR/MISC_IRAMSZ register. When the DBADR is set to 0 (default), the branching destination is set to 0xffffc00. When it is set to 1, the branching destination is set to 0x0.

Adding instruction breaks

The S1C17 Core supports two instruction breaks (hardware PC breaks). The S1C17706 increased this number to five, adding the control bits and registers given below.

- IBE2/DCR register: Enables instruction breaks #2.
- IBE3/DCR register: Enables instruction breaks #3.
- IBE4/DCR register: Enables instruction breaks #4.
- IBAR2[23:0]/IBAR2 register: Set instruction break address #2.
- IBAR3[23:0]/IBAR3 register: Set instruction break address #3.
- IBAR4[23:0]/IBAR4 register: Set instruction break address #4.

Note that the debugger included in the S5U1C17001C (Ver. 1.2.1) or later is required to use five hardware PC breaks.

25.4 Control Register Details

Table 25.4.1 List of Debug Registers

Address	Register name		Function
0x4020	MISC_DMODE1	Debug Mode Control Register 1	Enables peripheral operations in debug mode (PCLK).
0x5322	MISC_DMODE2	Debug Mode Control Register 2	Enables peripheral operations in debug mode (except PCLK).
0x5326	MISC_IRAMSZ	IRAM Size Select Register	Selects the IRAM size.
0xffff90	DBRAM	Debug RAM Base Register	Indicates the debug RAM base address.
0xffffa0	DCR	Debug Control Register	Controls debugging.
0xffffb8	IBAR2	Instruction Break Address Register 2	Sets Instruction break address #2.
0xffffbc	IBAR3	Instruction Break Address Register 3	Sets Instruction break address #3.
0xffffd0	IBAR4	Instruction Break Address Register 4	Sets Instruction break address #4.

The debug registers are described in detail below.

- Notes:**
- When data is written to the registers, the “Reserved” bits must always be written as 0 and not 1.
 - For debug registers not described here, refer to the S1C17 Core Manual.

Debug Mode Control Register 1 (MISC_DMODE1)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Debug Mode Control Register 1 (MISC_DMODE1)	0x4020 (8 bits)	D7–2	–	reserved	–	–	–	0 when being read.
		D1	DBRUN1	Run/stop select in debug mode	1 Run 0 Stop	0	R/W	
		D0	–	reserved	–	–	–	0 when being read.

D[7:2] Reserved

D1 DBRUN1: Run/Stop Select Bit in Debug Mode

Selects the operating status of the peripheral circuits that operate with PCLK in debug mode.

1 (R/W): Run

0 (R/W): Stop (default)

Setting DBRUN1 to 1 enables the peripheral circuits that operate with PCLK to run even in debug mode. Setting it to 0 will stop them when the S1C17 Core enters debug mode. Set DBRUN1 to 1 to maintain running status for these peripheral circuits in debug mode.

D0 Reserved

Debug Mode Control Register 2 (MISC_DMODE2)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Debug Mode Control Register 2 (MISC_DMODE2)	0x5322 (16 bits)	D15-1	—	reserved	—	—	—	0 when being read.
		D0	DBRUN2	Run/stop select in debug mode (except PCLK peripheral circuits)	1 Run 0 Stop	0	R/W	

D[15:1] Reserved

D0 **DBRUN2: Run/Stop Select Bit in Debug Mode (except PCLK peripheral circuits)**

Selects the operating status of the peripheral circuits that operate with a clock other than PCLK in debug mode.

1 (R/W): Run

0 (R/W): Stop (default)

Setting DBRUN2 to 1 enables the peripheral circuits that operate with a clock other than PCLK to run even in debug mode. Setting it to 0 will stop them when the S1C17 Core enters debug mode. Set DBRUN2 to 1 to maintain running status for these peripheral circuits in debug mode.

Some peripheral circuits, such as SPI, I2CS, and T16A, that run with an external input clock will not stop operating even if the C17 Core enters debug mode.

The LCD driver continues the operating status at occurrence of the debug interrupt.

IRAM Size Select Register (MISC_IRAMSZ)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
IRAM Size Select Register (MISC_IRAMSZ)	0x5326 (16 bits)	D15-9	—	reserved	—	—	—	0 when being read.	
		D8	DBADR	Debug base address select	1 0x0 0 0xffc00	0	R/W		
		D7	—	reserved	—	—	—	—	0 when being read.
		D6-4	IRAMACTSZ[2:0]	IRAM actual size	0x2 (= 4KB)	0x2	R		
		D3	—	reserved	—	—	—	—	0 when being read.
		D2-0	IRAMSZ[2:0]	IRAM size select	IRAMSZ[2:0] Size	0x5 512B 0x4 1KB 0x3 2KB 0x2 4KB Other reserved	0x2	R/W	

D[15:9] Reserved

D8 **DBADR: Debug Base Address Select Bit**

Selects the branching destination address when a debug interrupt occurs.

1(R/W): 0x0

0(R/W): 0xffc00 (default)

D7 Reserved

D[6:4] **IRAMACTSZ[2:0]: IRAM Actual Size Bits**

Indicates the actual internal RAM size embedded. (Default: 0x2)

D3 Reserved

D[2:0] **IRAMSZ[2:0]: IRAM Size Select Bits**

Selects the size of the internal RAM to be used.

Table 25.4.2 Internal RAM Size Selection

IRAMSZ[2:0]	Internal RAM size
0x5	512B
0x4	1KB
0x3	2KB
0x2	4KB
Other	Reserved

(Default: 0x2)

Note: The MISC_IRAMSZ register is write-protected. To alter this register settings, you must override this write-protection by writing 0x96 to the MISC_PROT register. Normally, the MISC_PROT register should be set to a value other than 0x96, except when altering the MISC_IRAMSZ register. Unnecessary rewriting of the MISC_IRAMSZ register may result in system malfunctions.

Debug RAM Base Register (DBRAM)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Debug RAM Base Register (DBRAM)	0xffff90 (32 bits)	D31–24	–	Unused (fixed at 0)	0x0	0x0	R	
		D23–0	DBRAM[23:0]	Debug RAM base address	0x2fc0	0x fc0	R	

D[31:24] Not used (Fixed at 0)

D[23:0] DBRAM[23:0]: Debug RAM Base Address Bits

Read-only register containing the beginning address of the debugging work area (64 bytes).

Debug Control Register (DCR)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Debug Control Register (DCR)	0xffffa0 (8 bits)	D7	IBE4	Instruction break #4 enable	1 Enable	0 Disable	0	R/W	
		D6	IBE3	Instruction break #3 enable	1 Enable	0 Disable	0	R/W	
		D5	IBE2	Instruction break #2 enable	1 Enable	0 Disable	0	R/W	
		D4	DR	Debug request flag	1 Occurred	0 Not occurred	0	R/W	Reset by writing 1.
		D3	IBE1	Instruction break #1 enable	1 Enable	0 Disable	0	R/W	
		D2	IBE0	Instruction break #0 enable	1 Enable	0 Disable	0	R/W	
		D1	SE	Single step enable	1 Enable	0 Disable	0	R/W	
		D0	DM	Debug mode	1 Debug mode	0 User mode	0	R	

D7 IBE4: Instruction Break #4 Enable Bit

Enables or disables instruction break #4.

1 (R/W): Enabled

0 (R/W): Disabled (default)

If this bit is set to 1, the instruction fetch address and the value set in the IBAR4 register are compared. If they match, an instruction break is generated. If this bit is set to 0, no comparison is performed.

D6 IBE3: Instruction Break #3 Enable Bit

Enables or disables instruction break #3.

1 (R/W): Enabled

0 (R/W): Disabled (default)

If this bit is set to 1, the instruction fetch address and the value set in the IBAR3 register are compared. If they match, an instruction break is generated. If this bit is set to 0, no comparison is performed.

D5 IBE2: Instruction Break #2 Enable Bit

Enables or disables instruction break #2.

1 (R/W): Enabled

0 (R/W): Disabled (default)

If this bit is set to 1, the instruction fetch address and the value set in the IBAR2 register are compared. If they match, an instruction break is generated. If this bit is set to 0, no comparison is performed.

D4 DR: Debug Request Flag Bit

Indicates the presence or absence of an external debug request.

- 1 (R): Request generated
- 0 (R): Request not generated (default)
- 1 (W): Flag is reset
- 0 (W): Ignored

This flag is cleared (reset to 0) when 1 is written. It must be cleared before the debug processing routine is terminated by the retd instruction.

D3 IBE1: Instruction Break #1 Enable Bit

Enables or disables instruction break #1.

- 1 (R/W): Enabled
- 0 (R/W): Disabled (default)

If this bit is set to 1, the instruction fetch address and the value set in the IBAR1 register are compared. If they match, an instruction break is generated. If this bit is set to 0, no comparison is performed.

D2 IBE0: Instruction Break #0 Enable Bit

Enables or disables instruction break #0.

- 1 (R/W): Enabled
- 0 (R/W): Disabled (default)

If this bit is set to 1, the instruction fetch address and the value set in the IBAR0 register are compared. If they match, an instruction break is generated. If this bit is set to 0, no comparison is performed.

D1 SE: Single Step Enable Bit

Enables or disables single-step operations.

- 1 (R/W): Enabled
- 0 (R/W): Disabled (default)

D0 DM: Debug Mode Bit

Indicates the processor operating mode (debug mode or user mode).

- 1 (R): Debug mode
- 0 (R): User mode (default)

Instruction Break Address Register 2 (IBAR2)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Instruction Break Address Register 2 (IBAR2)	0xffffb8 (32 bits)	D31–24	–	reserved	–	–	–	0 when being read.
		D23–0	IBAR2[23:0]	Instruction break address #2 IBAR223 = MSB IBAR20 = LSB	0x0 to 0xfffff	0x0	R/W	

D[31:24] Reserved

D[23:0] IBAR2[23:0]: Instruction Break Address #2 Bits

Sets instruction break address #2. (Default: 0x000000)

Instruction Break Address Register 3 (IBAR3)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Instruction Break Address Register 3 (IBAR3)	0xffffbc (32 bits)	D31–24	–	reserved	–	–	–	0 when being read.
		D23–0	IBAR3[23:0]	Instruction break address #3 IBAR323 = MSB IBAR30 = LSB	0x0 to 0xfffff	0x0	R/W	

D[31:24] Reserved

D[23:0] IBAR3[23:0]: Instruction Break Address #3 Bits

Sets instruction break address #3. (Default: 0x000000)

Instruction Break Address Register 4 (IBAR4)

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Instruction Break Address Register 4 (IBAR4)	0xffffd0 (32 bits)	D31–24	–	reserved	–	–	–	0 when being read.
		D23–0	IBAR4[23:0]	Instruction break address #4 IBAR423 = MSB IBAR40 = LSB	0x0 to 0xfffff	0x0	R/W	

D[31:24] Reserved

D[23:0] IBAR4[23:0]: Instruction Break Address #4 Bits

Sets instruction break address #4. (Default: 0x000000)

26 Multiplier/Divider (COPRO)

26.1 Overview

The S1C17706 has an embedded coprocessor that provides multiplier/divider functions. The following shows the features of the multiplier/divider:

- **Multiplication:** Supports signed/unsigned multiplications.
(16 bits \times 16 bits = 32 bits)
Can be executed in 1 cycle.
- **Multiplication and accumulation (MAC):** Supports signed MAC operations with overflow detection function
(16 bits \times 16 bits + 32 bits = 32 bits)
Can be executed in 1 cycle.
- **Division:** Supports signed/unsigned divisions.
(16 bits \div 16 bits = 16 bits with 16-bit residue)
Can be executed in 17 to 20 cycles.

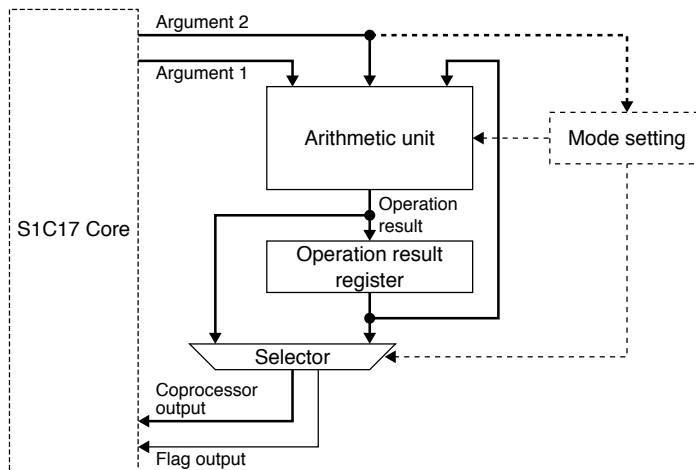


Figure 26.1.1 Multiplier/Divider Block Diagram

26.2 Operation Mode and Output Mode

The Multiplier/divider operates according to the operation mode specified by the application program. As listed in Table 26.2.1, the multiplier/divider supports nine operations.

The multiplication, division and MAC results are 32-bit data, therefore, the S1C17 Core cannot read them in one access cycle. The output mode is provided to specify the high-order 16 bits or low-order 16 bits of the operation results to be read from the multiplier/divider.

The operation and output modes can be specified with a 7-bit data by writing it to the mode setting register in the multiplier/divider. Use a “ld.cw” instruction for this writing.

```
ld.cw %rd,%rs    %rs[6:0] is written to the mode setting register. (%rd: not used)
ld.cw %rd,imm7  imm7[6:0] is written to the mode setting register. (%rd: not used)
```




Figure 26.2.1 Mode Setting Register

Table 26.2.1 Mode Settings

Setting value (D[6:4])	Output mode	Setting value (D[3:0])	Operation mode
0x0	16 low-order bits output mode The low-order 16-bits of operation results can be read as the coprocessor output.	0x0	Initialize mode 0 Clears the operation result register to 0x0.
0x1	16 high-order bits output mode The high-order 16-bits of operation results can be read as the coprocessor output.	0x1	Initialize mode 1 Loads the 16-bit augend into the low-order 16 bits of the operation result register.
0x2–0x7	Reserved	0x2	Initialize mode 2 Loads the 32-bit augend into the operation result register.
		0x3	Operation result read mode Outputs the data in the operation result register without computation.
		0x4	Unsigned multiplication mode Performs unsigned multiplication.
		0x5	Signed multiplication mode Performs signed multiplication.
		0x6	Reserved
		0x7	Signed MAC mode Performs signed MAC operation.
		0x8	Unsigned division mode Performs unsigned division.
		0x9	Signed division mode Performs signed division.
		0xa–0xf	Reserved

26.3 Multiplication

The multiplication function performs “A (32 bits) = B (16 bits) × C (16 bits).”

To perform a multiplication, set the operation mode to 0x4 (unsigned multiplication) or 0x5 (signed multiplication). Then send the 16-bit multiplicand (B) and 16-bit multiplier (C) to the multiplier/divider using a “ld.ca” instruction. The one-half (16 bits according to the output mode) result (A[15:0] or A[31:16]) and the flag status will be returned to the CPU registers. Another one-half should be read by setting the multiplier/divider into operation result read mode.

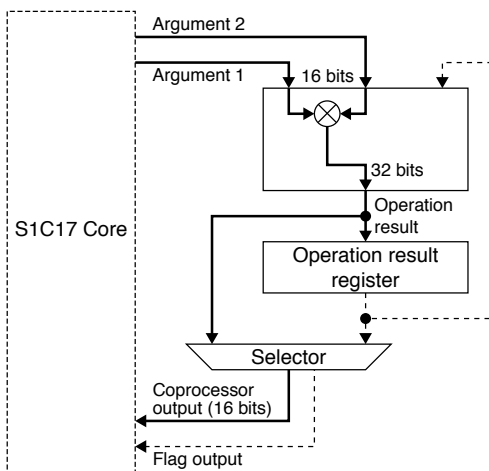


Figure 26.3.1 Data Path in Multiplication Mode

Table 26.3.1 Operation in Multiplication Mode

Mode setting value	Instruction	Operations	Flags	Remarks
0x04 or 0x05	ld.ca %rd,%rs	res[31:0] ← %rd × %rs %rd ← res[15:0]	psr (CVZN) ← 0b0000	The operation result register keeps the operation result until it is rewritten by other operation.
	(ext imm9) ld.ca %rd,imm7	res[31:0] ← %rd × imm7/16 %rd ← res[15:0]		
0x14 or 0x15	ld.ca %rd,%rs	res[31:0] ← %rd × %rs %rd ← res[31:16]		
	(ext imm9) ld.ca %rd,imm7	res[31:0] ← %rd × imm7/16 %rd ← res[31:16]		

res: operation result register

Example:

```
ld.cw %r0,0x4 ; Sets the modes (unsigned multiplication mode and 16 low-order bits output mode).
ld.ca %r0,%r1 ; Performs “res = %r0 × %r1” and loads the 16 low-order bits of the result to %r0.
ld.cw %r0,0x13 ; Sets the modes (operation result read mode and 16 high-order bits output mode).
ld.ca %r1,%r0 ; Loads the 16 high-order bits of the result to %r1.
```

26.4 Division

The division function performs “B (16 bits) ÷ C (16 bits) = A (16 bits), residue D (16 bits).”

To perform a division, set the operation mode to 0x8 (unsigned division) or 0x9 (signed division). Then send the 16-bit dividend (B) and 16-bit divisor (C) to the multiplier/divider using a “ld.ca” instruction. The quotient and the residue will be stored in the low-order 16 bits and the high-order 16 bits of the operation result register, respectively. The 16-bit quotient or residue according to the output mode specification and the flag status will be returned to the CPU registers. Another 16-bit result should be read by setting the multiplier/divider into operation result read mode.

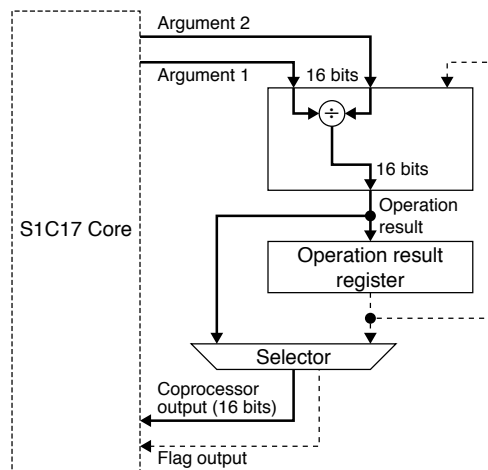


Figure 26.4.1 Data Path in Division Mode

Table 26.4.1 Operation in Division Mode

Mode setting value	Instruction	Operations	Flags	Remarks
0x08 or 0x09	ld.ca %rd,%rs	res[31:0] ← %rd ÷ %rs %rd ← res[15:0] (quotient)	psr (CVZN) ← 0b0000	The operation result register keeps the operation result until it is rewritten by other operation.
	(ext imm9) ld.ca %rd,imm7	res[31:0] ← %rd ÷ imm7/16 %rd ← res[15:0] (quotient)		
0x018 or 0x19	ld.ca %rd,%rs	res[31:0] ← %rd ÷ %rs %rd ← res[31:16] (residue)		
	(ext imm9) ld.ca %rd,imm7	res[31:0] ← %rd ÷ imm7/16 %rd ← res[31:16] (residue)		

res: operation result register

Example:

```
ld.cw %r0, 0x8 ; Sets the modes (unsigned division mode and 16 low-order bits output mode).
ld.ca %r0, %r1 ; Performs "res = %r0 ÷ %r1" and loads the 16 low-order bits of the result (quotient) to %r0.
ld.cw %r0, 0x13 ; Sets the modes (operation result read mode and 16 high-order bits output mode).
ld.ca %r1, %r0 ; Loads the 16 high-order bits of the result (residue) to %r1.
```

26.5 MAC

The MAC (multiplication and accumulation) function performs “A (32 bits) = B (16 bits) × C (16 bits) + A (32 bits).”

Before performing a MAC operation, the initial value (A) must be set to the operation result register.

To clear the operation result register (A = 0), just set the operation mode to 0x0. It is not necessary to send 0x0 to the multiplier/divider with another instruction.

To load a 16-bit value or a 32-bit value to the operation result register, set the operation mode to 0x1 (16 bits) or 0x2 (32 bits), respectively. Then send the initial value to the multiplier/divider using a “ld.cf” instruction.

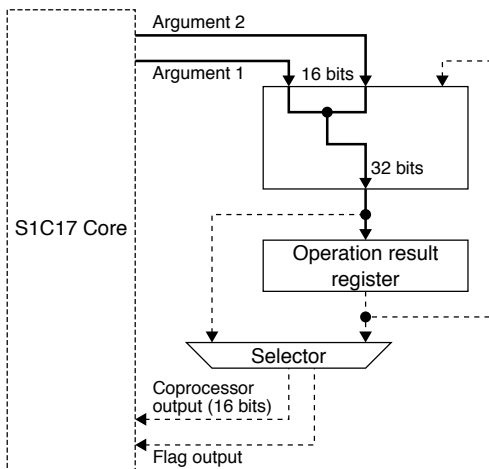


Figure 26.5.1 Data Path in Initialize Mode

Table 26.5.1 Initializing the Operation Result Register

Mode setting value	Instruction	Operations	Remarks
0x0	–	res[31:0] ← 0x0	Setting the operating mode executes the initialization without sending data.
0x1	ld.cf %rd, %rs	res[31:16] ← 0x0 res[15:0] ← %rs	
	(ext imm9) ld.cf %rd, imm7	res[31:16] ← 0x0 res[15:0] ← imm7/16	
0x2	ld.cf %rd, %rs	res[31:16] ← %rd res[15:0] ← %rs	
	(ext imm9) ld.cf %rd, imm7	res[31:16] ← %rd res[15:0] ← imm7/16	

res: operation result register

To perform a MAC operation, set the operation mode to 0x7 (signed MAC). Then send the 16-bit multiplicand (B) and 16-bit multiplier (C) to the multiplier/divider using a “ld.ca” instruction. The one-half (16 bits according to the output mode) result (A[15:0] or A[31:16]) and the flag status will be returned to the CPU registers. Another one-half should be read by setting the multiplier/divider into operation result read mode.

The overflow (V) flag in the PSR may be set to 1 according to the result. Other flags are set to 0.

When repeating the MAC operation without operation result read mode inserted, send multiplicand and multiplier data for number of required times. In this case it is not necessary to set the MAC mode every time.

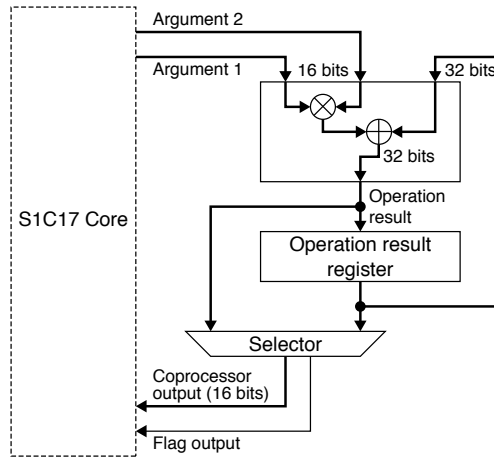


Figure 26.5.2 Data Path in MAC Mode

Table 26.5.2 Operation in MAC Mode

Mode setting value	Instruction	Operations	Flags	Remarks
0x07	ld.ca %rd,%rs	$res[31:0] \leftarrow \%rd \times \%rs + res[31:0]$ $\%rd \leftarrow res[15:0]$	psr (CVZN) $\leftarrow 0b0100$ if an overflow has occurred	The operation result register keeps the operation result until it is rewritten by other operation.
	(ext imm9) ld.ca %rd,imm7	$res[31:0] \leftarrow \%rd \times imm7/16 + res[31:0]$ $\%rd \leftarrow res[15:0]$		
0x17	ld.ca %rd,%rs	$res[31:0] \leftarrow \%rd \times \%rs + res[31:0]$ $\%rd \leftarrow res[31:16]$	Otherwise psr (CVZN) $\leftarrow 0b0000$	
	(ext imm9) ld.ca %rd,imm7	$res[31:0] \leftarrow \%rd \times imm7/16 + res[31:0]$ $\%rd \leftarrow res[31:16]$		

res: operation result register

Example:

```
ld.cw %r0,0x7 ; Sets the modes (signed MAC mode and 16 low-order bits output mode).
ld.ca %r0,%r1 ; Performs "res = %r0 × %r1 + res" and loads the 16 low-order bits of the result to %r0.
ld.cw %r0,0x13 ; Sets the modes (operation result read mode and 16 high-order bits output mode).
ld.ca %r1,%r0 ; Loads the 16 high-order bits of the result to %r1.
```

Conditions to set the overflow (V) flag

An overflow occurs in a MAC operation and the overflow flag is set to 1 when the signs of the multiplication result, operation result register value, and multiplication & accumulation result match the following conditions:

Table 26.5.3 Conditions to Set the Overflow (V) Flag

Mode setting value	Sign of multiplication result	Sign of operation result register value	Sign of multiplication & accumulation result
0x07	0 (positive)	0 (positive)	1 (negative)
0x07	1 (negative)	1 (negative)	0 (positive)

An overflow occurs when a MAC operation performs addition of positive values and a negative value results, or it performs addition of negative values and a positive value results. The coprocessor holds the operation result when the overflow (V) flag is cleared.

Conditions to clear the overflow (V) flag

The overflow (V) flag that has been set will be cleared when an overflow has not been occurred during execution of the "ld.ca" instruction for MAC operation or when the "ld.ca" or "ld.cf" instruction is executed in an operation mode other than operation result read mode.

26.6 Reading Results

The “ld.ca” instruction cannot load a 32-bit operation result to a CPU register, so a multiplication or MAC operation returns the one-half (16 bits according to the output mode) result (A[15:0] or A[31:16]) and the flag status to the CPU registers. Another one-half should be read by setting the multiplier/divider into operation result read mode. The operation result register keeps the loaded operation result until it is rewritten by other operation.

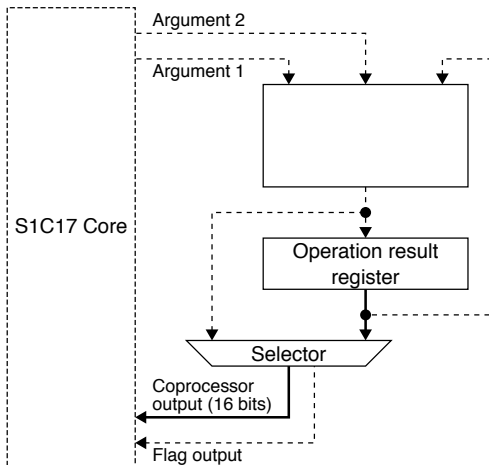


Figure 26.6.1 Data Path in Operation Result Read Mode

Table 26.6.1 Operation in Operation Result Read Mode

Mode setting value	Instruction	Operations	Flags	Remarks
0x03	ld.ca %rd, %rs	%rd ← res[15:0]	psr (CVZN) ← 0b0000	This operation mode does not affect the operation result register.
	ld.ca %rd, imm7	%rd ← res[15:0]		
0x13	ld.ca %rd, %rs	%rd ← res[31:16]		
	ld.ca %rd, imm7	%rd ← res[31:16]		

res: operation result register

27 Electrical Characteristics

27.1 Absolute Maximum Ratings

(V_{SS} = 0V)

Item	Symbol	Condition	Rated value	Unit
Power supply voltage	V _{DD}		-0.3 to 4.0	V
Analog power supply voltage	AV _{DD}	AV _{DD} = V _{DD}	-0.3 to 4.0	V
LCD power supply voltage	V _{C5}		-0.3 to 6.0	V
Input voltage	V _I		-0.3 to V _{DD} + 0.3	V
Output voltage	V _O		-0.3 to V _{DD} + 0.3	V
High level output current	I _{OH}	1 pin	-5	mA
		Total of all pins	-20	mA
Low level output current	I _{OL}	1 pin	5	mA
		Total of all pins	20	mA
Permissible loss *1	V _O		200	mW
Operating temperature	T _a		-25 to 70	°C
Storage temperature	T _{stg}		-65 to 150	°C
Soldering temperature/time	T _{sol}		260°C, 10 seconds (lead section)	–

*1 In case of plastic package

27.2 Recommended Operating Conditions

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating power supply voltage	V _{DD}	Normal operation mode	1.8		3.6	V
		Flash programming mode 1	2.7		3.6	V
		Flash programming mode 2	2.5		2.7	V
Analog power supply voltage	AV _{DD}	AV _{DD} = V _{DD}	1.8		3.6	V
Operating frequency	f _{osc3}	Crystal/ceramic oscillation	0.2		8.2	MHz
	f _{osc1}	Crystal oscillation		32.768		kHz
Capacitor between V _{SS} and V _{D1} *1	C ₁			0.1		μF
Capacitor between V _{SS} and V _{C1} *1	C ₂			0.1		μF
Capacitor between V _{SS} and V _{C2} *1	C ₃			0.1		μF
Capacitor between V _{SS} and V _{C3} *1	C ₄			0.1		μF
Capacitor between V _{SS} and V _{C4} *1	C ₅			0.1		μF
Capacitor between V _{SS} and V _{C5} *1	C ₆			0.1		μF
Capacitor between CA and CB *1	C ₇			0.1		μF
Capacitor between CA and CC *1	C ₈			0.1		μF
Capacitor between CD and CE *1	C ₉			0.1		μF
Capacitor between V _{SS} and V _{D2} *1	C ₁₀			0.1		μF
Capacitor between CF and CG *1	C ₁₁			0.1		μF

*1 The capacitors are not required when LCD driver is not used. In this case, leave the V_{C1} to V_{C5} and CA to CG pins open.

27.3 Current Consumption


Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = 25^\circ C$, $C_1 - C_5 = 0.1\mu F$, No LCD panel load, $PCKEN = 0x3$ (ON), $VD1MD = 0x0$, $FLCYC[2:0] = 0x4$ (1 cycle), $CCKGR[1:0] = 0x0$ (gear ratio 1/1)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Current consumption in SLEEP mode	I _{SLP}	OSC1 = OFF, IOSC = OFF, OSC3 = OFF		1.2	4.5	μA
Current consumption in HALT mode	I _{HALT1}	OSC1 = 32kHz, IOSC = OFF, OSC3 = OFF, PCKEN = 0x0(OFF)		2.7	5	μA
		OSC1 = 32kHz, IOSC = OFF, OSC3 = OFF		4.5	9	μA
	I _{HALT2}	OSC1 = 32kHz, IOSC = OFF, OSC3 = 8MHz (ceramic)		700	900	μA
	I _{HALT3}	OSC1 = 32kHz, IOSC = ON, OSC3 = OFF		270	400	μA
Current consumption during execution *1	I _{EXE1}	OSC1 = 32kHz, IOSC = OFF, OSC3 = OFF, CPU = OSC1		18	25	μA
		OSC1 = 32kHz, IOSC = OFF, OSC3 = OFF, CCKGR = 0x2 (gear ratio 1/4), CPU = OSC1		10	14	μA
	I _{EXE2}	OSC1 = 32kHz, IOSC = OFF, OSC3 = 1MHz (ceramic), CPU = OSC3		550	770	μA
		OSC1 = 32kHz, IOSC = OFF, OSC3 = 8MHz (ceramic), CPU = OSC3		4200	5000	μA
		OSC1 = 32kHz, IOSC = OFF, OSC3 = 8MHz (ceramic), CCKGR = 0x2 (gear ratio 1/4), CPU = OSC3		2100	3000	μA
	I _{EXE3}	OSC1 = 32kHz, IOSC = ON, OSC3 = OFF, CPU = IOSC		1300	1800	μA
	I _{EXE11}	OSC1 = 32kHz, IOSC = OFF, OSC3 = OFF, VD1MD = 0x1, CPU = OSC1		36	50	μA
	I _{EXE21}	OSC1 = 32kHz, IOSC = OFF, OSC3 = 1MHz (ceramic), VD1MD = 0x1, CPU = OSC3		900	1200	μA
		OSC1 = 32kHz, IOSC = OFF, OSC3 = 8MHz (ceramic), VD1MD = 0x1, CPU = OSC3		6600	8000	μA
I _{EXE31}	OSC1 = 32kHz, IOSC = ON, OSC3 = OFF, VD1MD = 0x1, CPU = IOSC		2200	2900	μA	
Current consumption during execution in heavy load protection mode *1	I _{EXE1H}	OSC1 = 32kHz, IOSC = OFF, OSC3 = OFF, CPU = OSC1, HVL D = 0x1		27	35	μA

*1 The values of current consumption during execution were measured when a test program consisting of 60.5% ALU instructions, 17% branch instructions, 12% memory read instructions, and 10.5% memory write instructions was executed continuously in the Flash memory.


Current consumption-temperature characteristic in HALT mode (OSC1 operation)

OSC1 = 32.768kHz, IOSC = OFF, OSC3 = OFF, PCKEN = 0x0(OFF), CCLKGR = 0, Typ. value

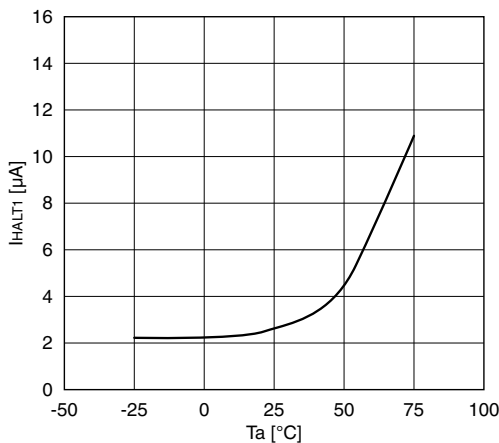


Current consumption-temperature characteristic (OSC1 operation)

OSC1 = 32.768kHz, IOSC = OFF, OSC3 = OFF, PCKEN = 0x3(ON), CCLKGR = 0, Typ. value

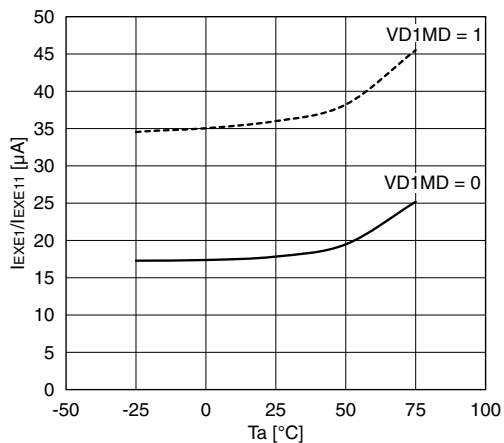


Current consumption-temperature characteristic + clock gear (OSC1 operation)

OSC1 = 32.768kHz, IOSC = OFF, OSC3 = OFF,
PCKEN = 0x3(ON), Typ. value

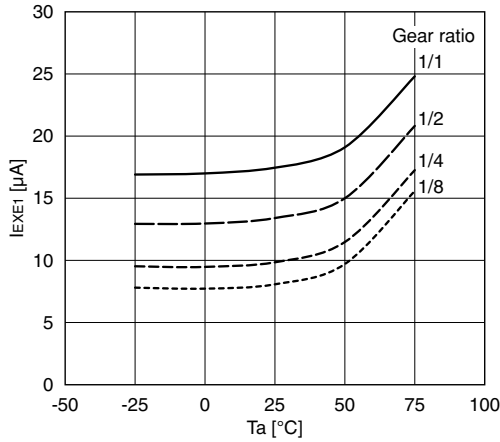


Current consumption-frequency characteristic (OSC3 operation)

OSC1 = OFF, IOSC = OFF,
PCKEN = 0x3(ON), CCKGR = 0, Ta = 25°C, Typ. value

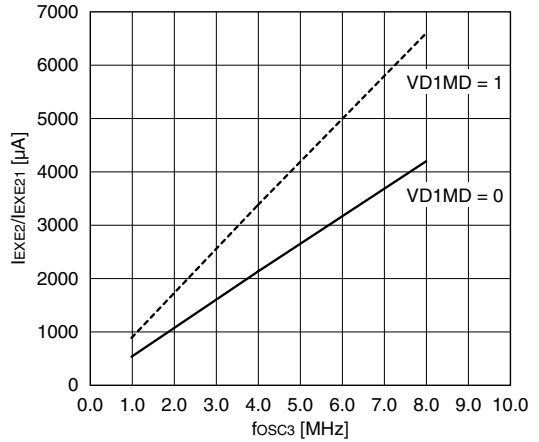


Current consumption-frequency characteristic + clock gear (OSC3 operation)

OSC1 = OFF, IOSC = OFF,
PCKEN = 0x3(ON), Ta = 25°C, Typ. value

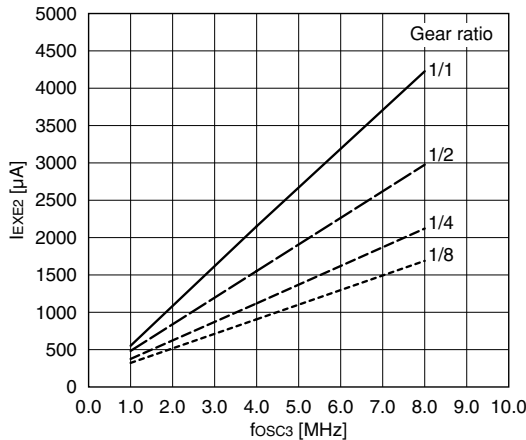

Current consumption-temperature characteristic + clock gear (IOSC operation)

OSC1 = OFF, OSC3 = OFF,
PCKEN = 0x3(ON), Typ. value

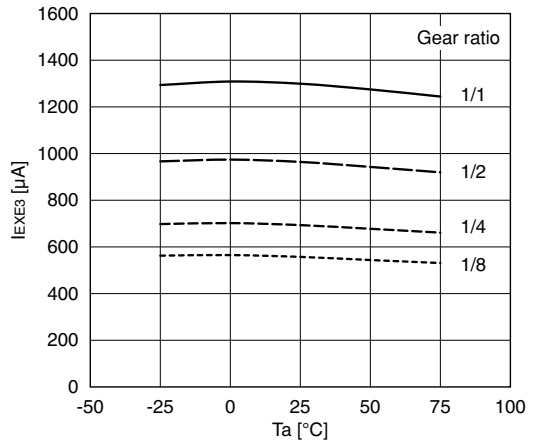

27.4 Oscillation Characteristics

Oscillation characteristics change depending on conditions (board pattern, components used, etc.). Use the following characteristics as reference values.

OSC1 crystal oscillation

Unless otherwise specified: V_{DD} = 1.8 to 3.6V, V_{SS} = 0V, Ta = 25°C, C_{G1} = 25pF external, C_{D1} = built-in, R_{F1} = built-in

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Oscillation start time*1	t _{sta}				3	s
Built-in drain capacitance	C _{D1}	In case of the chip		10		pF
Built-in feedback resistor	R _{F1}			10		MΩ

*1 Crystal resonator = MC-146: manufactured by EPSON TOYOCOM (R₁ = 65kΩ Max., C_L = 12.5pF)

OSC3 crystal oscillation

Unless otherwise specified: V_{DD} = 1.8 to 3.6V, V_{SS} = 0V, Ta = 25°C, R_{F3} = 1MΩ, C_{G3} = C_{D3} = 15pF

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Oscillation start time*1	t _{sta}				20	ms

*1 Crystal resonator = MA-406: manufactured by EPSON TOYOCOM (R₁ = 150Ω, C_L = 10pF)

27 ELECTRICAL CHARACTERISTICS

OSC3 ceramic oscillation

Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = 25^\circ C$, $R_{f3} = 1M\Omega$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Oscillation start time *1	t_{sta}				1	ms

*1 Ceramic resonator = CSTR4M00G53095-R0: manufactured by Murata Manufacturing Co., Ltd ($C_{G3} = C_{D3} = 15pF$ built-in)


IOSC oscillation

Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = -25$ to $70^\circ C$


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Oscillation start time	t_{sta}				5	μs
Oscillation frequency	f_{osc}	Normal operation mode	2.16	2.70	3.24	MHz

IOSC oscillation frequency-temperature characteristic

Typ. value

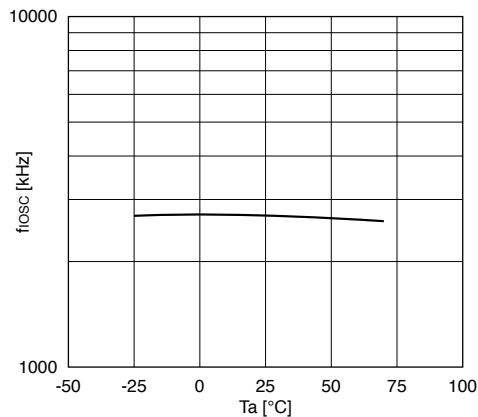

27.5 External Clock Input Characteristics

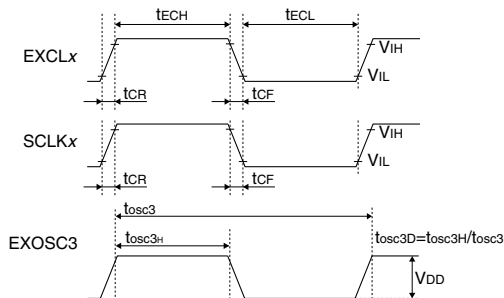

Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $V_{IH} = 0.8V_{DD}$, $V_{IL} = 0.2V_{DD}$, $T_a = -25$ to $70^\circ C$

Item	Symbol	Min.	Typ.	Max.	Unit
EXCLx input High pulse width	t_{ECH}	$1/2f_{sys}$			s
EXCLx input Low pulse width	t_{ECL}	$1/2f_{sys}$			s
UART transfer rate	R_U			460800	bps
UART transfer rate (IrDA mode)	R_{UIrDA}			115200	bps
Input rise time	t_{CR}			80	ns
Input fall time	t_{CF}			80	ns
EXOSC3 clock cycle time	t_{OSC3}	125			ns
EXOSC3 clock input duty	t_{OSC3D}	46		54	%

* f_{sys} : System operating clock frequency


27.6 Input/Output Pin Characteristics

Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = -25$ to $70^\circ C$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
High level input voltage	V_{IH}	Pxx	$0.8V_{DD}$		V_{DD}	V
Low level input voltage	V_{IL}	Pxx	0		$0.2V_{DD}$	V
High level Schmitt input threshold voltage	V_{T1+}	#RESET	$0.5V_{DD}$		$0.9V_{DD}$	V
Low level Schmitt input threshold voltage	V_{T1-}	#RESET	$0.1V_{DD}$		$0.5V_{DD}$	V
High level Schmitt input threshold voltage *1	V_{T2+}	Pxx	$0.5V_{DD}$		$0.9V_{DD}$	V
Low level Schmitt input threshold voltage *1	V_{T2-}	Pxx	$0.1V_{DD}$		$0.5V_{DD}$	V
Hysteresis voltage	ΔV_T	Pxx, #RESET	0.1			V
High level output current	I_{OH}	Pxx, $V_{OH} = 0.9V_{DD}$			-0.5	mA
Low level output current	I_{OL}	Pxx, $V_{OL} = 0.1V_{DD}$	0.5			mA
Leakage current	I_{LEAK}	Pxx, #RESET	-100		100	nA
Input pull-up resistance	R_{IN}	Pxx, #RESET	100		500	k Ω
Pin capacitance	C_{IN}	Pxx, $V_{IN} = 0V$, $f = 1MHz$, $T_a = 25^\circ C$			15	pF
Reset low pulse width	t_{SR}	$V_{IH} = 0.8V_{DD}$, $V_{IL} = 0.2V_{DD}$	100			μs
Operating power voltage	V_{SR}		1.8			V
Power-on reset time	t_{PSR}		1.0			ms


*1 When Schmitt input is enabled

Schmitt input threshold voltage




High-level output current characteristic

$T_a = 70^\circ C$, Max. value

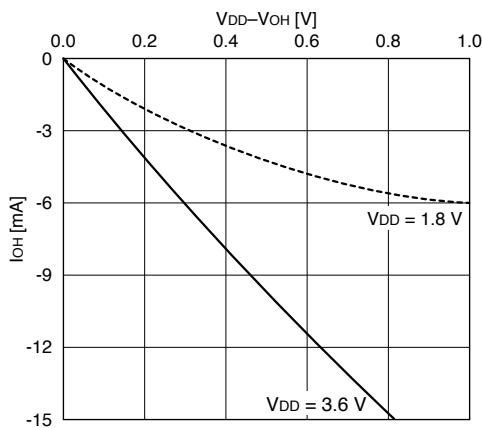


Low-level output current characteristic

$T_a = 70^\circ C$, Min. value

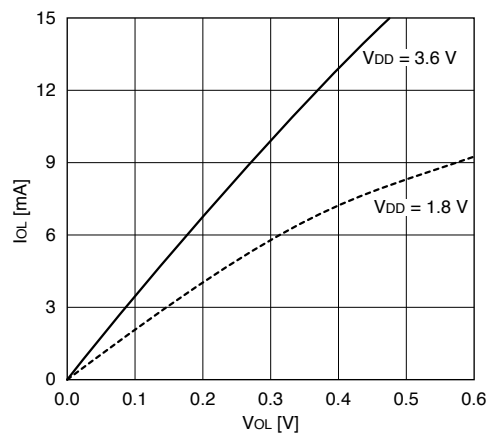

Reset pulse




27 ELECTRICAL CHARACTERISTICS

Power-on reset timing



Note: Be sure to set the #RESET pin to 0.1 V_{DD} or less when performing a power-on reset after the power is turned off.

27.7 SPI Characteristics

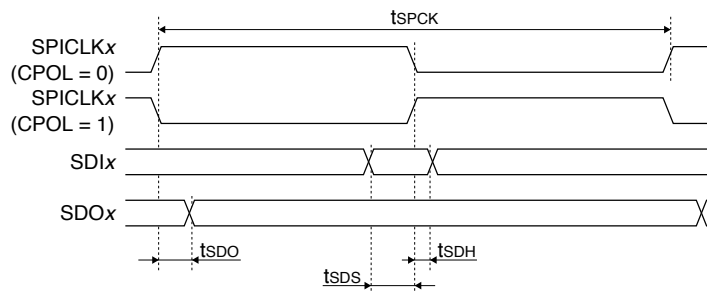

Master mode

Unless otherwise specified: V_{DD} = 1.8 to 3.6V, V_{SS} = 0V, Ta = -25 to 70°C


Item	Symbol	Min.	Typ.	Max.	Unit
SPICLKx cycle time	tSPCK	500			ns
SDIx setup time	tSDS	70			ns
SDIx hold time	tSDH	10			ns
SDOx output delay time	tSDO			20	ns

Slave mode

Unless otherwise specified: V_{DD} = 1.8 to 3.6V, V_{SS} = 0V, Ta = -25 to 70°C

Item	Symbol	Min.	Typ.	Max.	Unit
SPICLKx cycle time	tSPCK	500			ns
SDIx setup time	tSDS	10			ns
SDIx hold time	tSDH	10			ns
SDOx output delay time	tSDO			80	ns

27.8 I²C Characteristics

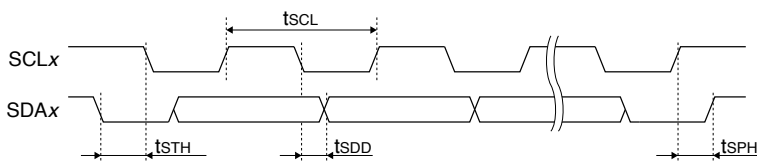

Unless otherwise specified: V_{DD} = 1.8 to 3.6V, V_{SS} = 0V, Ta = -25 to 70°C

Item	Symbol	Min.	Typ.	Max.	Unit
SCL cycle time	tSCL	2500			ns
Start condition hold time	tSTH	1/f _{sys}			ns
Data output delay time	tSDD	1/f _{sys}			ns
Stop condition hold time	tSPH	1/f _{sys}			ns

* f_{sys}: System operating clock frequency

27.9 LCD Driver Characteristics

The typical values in the following LCD driver characteristics varies depending on the panel load (panel size, drive duty, number of display pixels and display contents), so evaluate them by connecting to the actually used LCD panel.


LCD drive voltage

Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = 25^\circ C$, $C_1 - C_{11} = 0.1\mu F$, Checker pattern displayed, No panel load

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
LCD drive voltage	V_{C1}	Connect $1M\Omega$ load resistor between V_{SS} and V_{C1}	$0.18V_{C5}$		$0.22V_{C5}$	V	
	V_{C2}	Connect $1M\Omega$ load resistor between V_{SS} and V_{C2}	$0.39V_{C5}$		$0.43V_{C5}$	V	
	V_{C3}	Connect $1M\Omega$ load resistor between V_{SS} and V_{C3}	$0.59V_{C5}$		$0.63V_{C5}$	V	
	V_{C4}	Connect $1M\Omega$ load resistor between V_{SS} and V_{C4}	$0.79V_{C5}$		$0.83V_{C5}$	V	
	V_{C5}	Connect $1M\Omega$ load resistor between V_{SS} and V_{C5}	LC[3:0] = 0x0	Typ. \times 0.94	4.20	Typ. \times 1.06	V
			LC[3:0] = 0x1		4.30		V
			LC[3:0] = 0x2		4.40		V
			LC[3:0] = 0x3		4.50		V
			LC[3:0] = 0x4		4.60		V
			LC[3:0] = 0x5		4.70		V
			LC[3:0] = 0x6		4.80		V
			LC[3:0] = 0x7		4.90		V
			LC[3:0] = 0x8		5.00		V
			LC[3:0] = 0x9		5.10		V
			LC[3:0] = 0xa		5.20		V
			LC[3:0] = 0xb		5.30		V
			LC[3:0] = 0xc		5.40		V
LC[3:0] = 0xd	5.50	V					
LC[3:0] = 0xe	5.60	V					
LC[3:0] = 0xf	5.70	V					


LCD drive voltage-supply voltage characteristic (with no power voltage booster used)

When a $1M\Omega$ load resistor is connected between V_{SS} and V_{C5} (no panel load), $T_a = 25^\circ C$, Typ. value

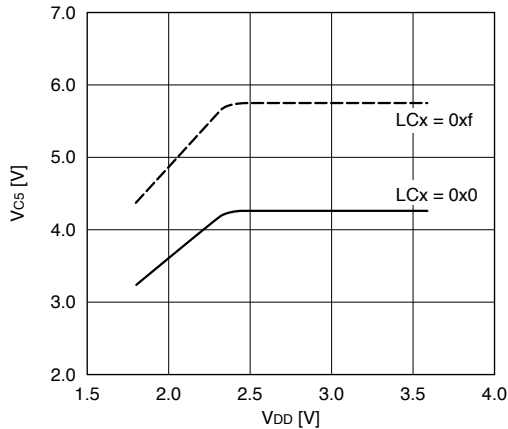


LCD drive voltage-supply voltage characteristic (with power voltage booster used)

When a $1M\Omega$ load resistor is connected between V_{SS} and V_{C5} (no panel load), $T_a = 25^\circ C$, Typ. value

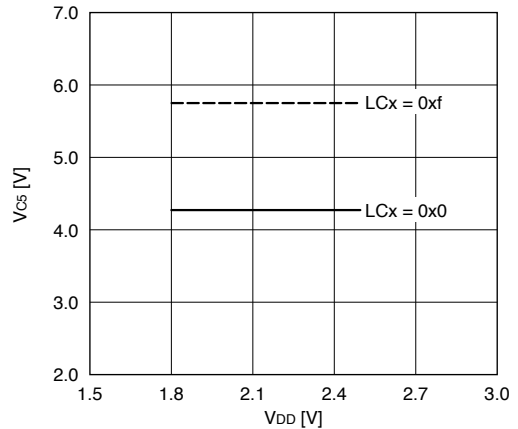

LCD drive voltage-temperature characteristic


Typ. value

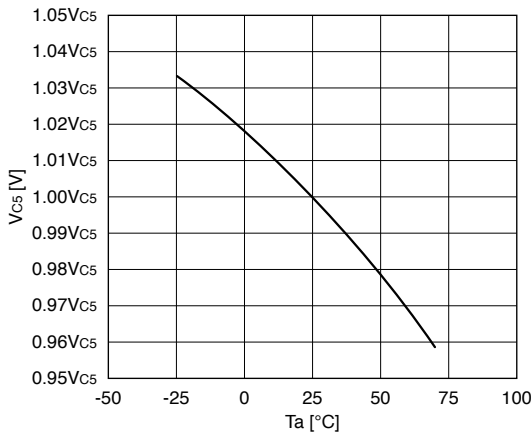

LCD drive voltage-load characteristic

When a load is connected to the Vcs pin only

LCx = 0cf, Ta = 25°C, Typ. value

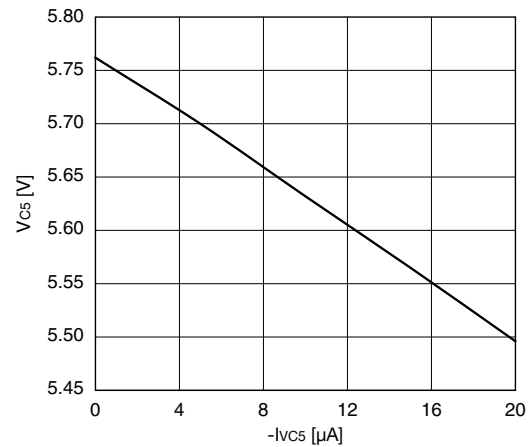

SEG/COM output characteristics

Unless otherwise specified: VDD = 1.8 to 3.6V, VSS = 0V, Ta = -25 to 70°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Segment/Common output current	I _{SEGH}	SEGxx, COMxx, V _{SEGH} = V _{C5} - 0.1V			-5	µA
	I _{SEGL}	SEGxx, COMxx, V _{SEGL} = 0.1V	5			µA

LCD driver circuit current consumption

Unless otherwise specified: VDD = 1.8 to 3.6V, VSS = 0V, Ta = 25°C, C1–C5 = 0.1µF, No LCD panel load,

PCKEN = 0x0 (OFF), FLCYC[2:0] = 0x4 (1 cycle), CCKGR[1:0] = 0x0 (gear ratio 1/1)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
LCD circuit current *1	I _{LCD1}	DSPC[1:0] = 0x1 (all on), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 2.5~3.6V		8	16	µA
		DSPC[1:0] = 0x1 (checker pattern), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 2.5~3.6V		25	30	µA
LCD circuit current in heavy load protection mode *2	I _{LCD1H}	DSPC[1:0] = 0x1 (all on), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 2.5~3.6V, LHVLD = 0x1		25	30	µA
		DSPC[1:0] = 0x1 (checker pattern), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 2.5~3.6V, LHVLD = 0x1		40	45	µA
LCD circuit current when the power voltage booster is active *3	I _{LCD2}	DSPC[1:0] = 0x1 (all on), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 1.8~2.5V, PBON = 0x1		15	20	µA
		DSPC[1:0] = 0x1 (checker pattern), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 1.8~2.5V, PBON = 0x1		45	55	µA
LCD circuit current in heavy load protection mode when the power voltage booster is active *4	I _{LCD2H}	DSPC[1:0] = 0x1 (all on), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 1.8~2.5V, LHVLD = 0x1, PBON = 0x1		45	50	µA
		DSPC[1:0] = 0x1 (checker pattern), LC[3:0] = 0xf, OSC1 = 32kHz, VDD = 1.8~2.5V, LHVLD = 0x1, PBON = 0x1		75	80	µA

*1 This value is added to the current consumption in HALT mode or current consumption during execution when the LCD circuit is active. Current consumption increases according to the display contents and panel load.

*2 This value is added to the current consumption during execution in heavy load protection mode when the LCD circuit is active. Current consumption increases according to the display contents and panel load.

*3 This value is added to the current consumption in HALT mode or current consumption during execution when the power voltage booster and the LCD circuit are active. Current consumption increases according to the display contents and panel load.

*4 This value is added to the current consumption during execution in heavy load protection mode when the power voltage booster and the LCD circuit are active. Current consumption increases according to the display contents and panel load.

27.10 A/D Converter Characteristics

Analog characteristics

Unless otherwise specified: $V_{DD} = AV_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = -25$ to $70^{\circ}C$, $ADST[2:0] = 0x7$ (9 cycles)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Resolution	—			10		bits
A/D conversion clock	f_{ADCLK}		16		2000	kHz
Sampling rate *1	f_{SMP}		0.8		100	ksps
Zero-scale error	EZS				± 3	LSB
Full-scale error	EFS				± 3	LSB
Integral linearity error *2	EINL	$AV_{DD} = 2.7$ to $3.6V$			± 1.5	LSB
		$AV_{DD} = 1.8$ to $3.6V$			± 2.0	LSB
Differential linearity error	EDNL				± 1.0	LSB
Analog input resistance	R_{AIN}				11	k Ω
Analog input capacitance	C_{AIN}				20	pF

*1 Condition for Max. value: A/D converter clock frequency $f_{ADCLK} = 2MHz$. Condition for Min. value: A/D converter clock frequency $f_{ADCLK} = 16kHz$.

*2 Integral linearity error is measured at the end point line.

A/D converter current consumption


Unless otherwise specified: $V_{DD} = AV_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = 25^{\circ}C$, $ADST[2:0] = 0x7$ (9 cycles), $PCKEN[1:0] = 0x3$ (ON), $A_{IN} = AV_{DD}/2V$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
A/D converter operating current *1	I_{ADC}	$V_{DD} = AV_{DD} = 3.6V$, $f_{SMP} = 100ksps$		200	350	μA

*1 This value is added to the current consumption in HALT mode (only when $PCKEN[1:0] = 0x3$ (ON)) or current consumption during execution when the A/D converter is active.

A/D converter current consumption-voltage characteristic

$A_{IN} = AV_{DD}/2V$, $T_a = 25^{\circ}C$, Typ. value

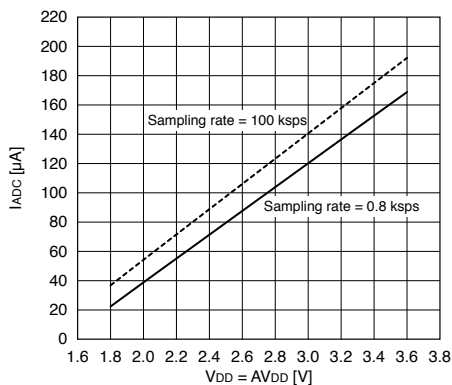

27.11 R/F Converter Characteristics

Analog characteristics


Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = -25$ to $70^\circ C$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Reference and sensor oscillation frequency *1	f_{RFCLK}		1		4000	kHz	
Reference and sensor oscillation frequency IC deviation *2	$\Delta f_{RFCLK}/\Delta IC$	Resistive sensor DC/AC oscillation mode	$V_{DD} = 3.6V$	-25		25	%
			$V_{DD} = 1.8V$	-50		50	%
		Capacitive sensor DC oscillation mode	$V_{DD} = 3.6V$	-25		25	%
			$V_{DD} = 1.8V$	-50		50	%
Reference resistor and resistive sensor resistance *3	R_{REF}, R_{SEN}	Resistive sensor DC/Capacitive sensor DC oscillation mode	1			$k\Omega$	
		Resistive sensor AC oscillation mode	10			$k\Omega$	
Reference capacitor and capacitive sensor capacitance *3	C_{REF}, C_{SEN}	Resistive sensor DC/AC oscillation mode	100			pF	
		Capacitive sensor DC oscillation mode	100		2000	pF	
Time base counter clock frequency	f_{TCCLK}				8.2	MHz	
RFIN pin high level Schmitt input voltage	V_{T+}		$0.5 \cdot V_{DD}$		$0.9 \cdot V_{DD}$	V	
RFIN pin low level Schmitt input voltage	V_{T-}		$0.1 \cdot V_{DD}$		$0.5 \cdot V_{DD}$	V	

- *1 The oscillation frequency/IC deviation characteristic value may increase due to variations in oscillation frequency caused by leakage if the oscillation frequency is 1 kHz or lower.
- *2 In these characteristics, unevenness between production lots, and variations in board, resistances and capacitances used in the measurement environment are taken into account (variations in temperature are not included).
- *3 The CR oscillation can be performed if the resistance or capacitance is out of the range shown in the table (see characteristic curves), note, however, that the oscillation frequency/IC deviation characteristic value may increase due to parasitic elements on the board and those in the IC.


RFC reference/sensor oscillation frequency-resistance characteristic (Resistive sensor DC/AC oscillation mode)

$C_{REF}/C_{SEN} = 1000pF$, $T_a = 25^\circ C$, Typ. value

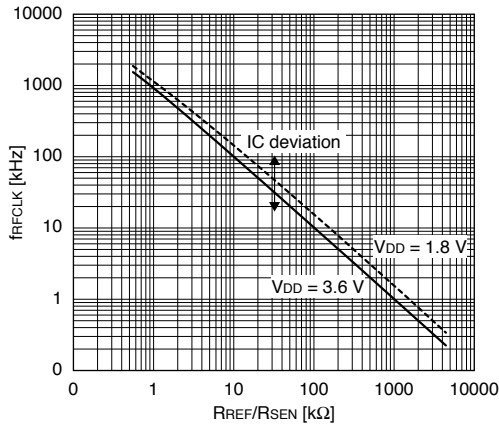

RFC reference/sensor oscillation frequency-capacitance characteristic (Capacitive sensor DC oscillation mode)


$R_{REF}/R_{SEN} = 100k\Omega$, $T_a = 25^\circ C$, Typ. value

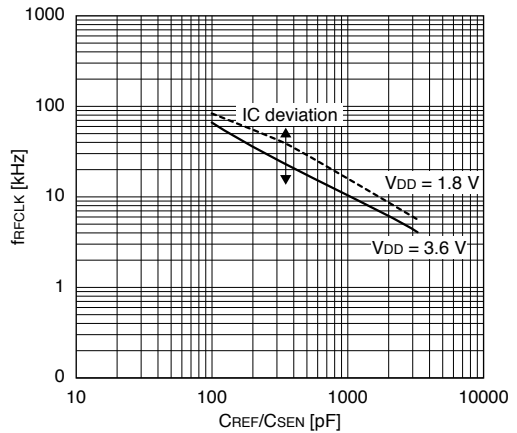

RFC reference/sensor oscillation frequency-temperature characteristic

(Resistive sensor DC/AC oscillation mode)


$R_{REF}/R_{SEN} = 100k\Omega$, $C_{REF}/C_{SEN} = 1000pF$, Typ. value

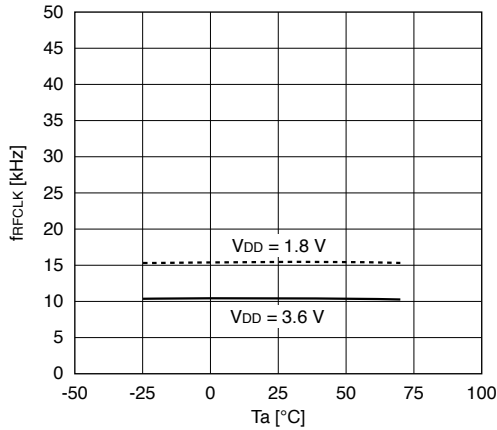

RFC reference/sensor oscillation frequency-temperature characteristic

(Capacitive sensor DC oscillation mode)

$R_{REF}/R_{SEN} = 100k\Omega$, $C_{REF}/C_{SEN} = 1000pF$, Typ. value

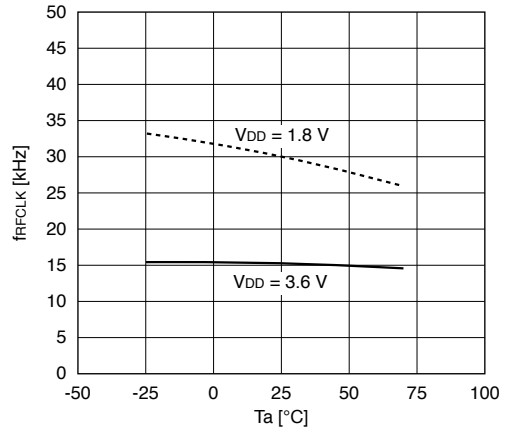

R/F converter current consumption


Unless otherwise specified: $V_{DD} = 3.6V$, $V_{SS} = 0V$, $T_a = 25^\circ C$, $PCKEN = 0x0$ (OFF), $C_{REF}/C_{SEN} = 1000pF$, $R_{REF}/R_{SEN} = 100k\Omega$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
R/F converter operating current *1	I _{RF} C	Resistive sensor DC/AC oscillation mode		100	150	μA
		Capacitive sensor DC oscillation mode		110	170	μA

*1 This value is added to the current consumption in HALT mode or current consumption during execution when the R/F converter is active. Current consumption depends on the V_{DD} voltage, reference capacitance/sensor capacitance, and reference/sensor oscillation frequency.


RFC reference/sensor oscillation current consumption-frequency characteristic
(Resistive sensor DC/AC oscillation mode)

$C_{REF} = 1000pF$, Typ. value

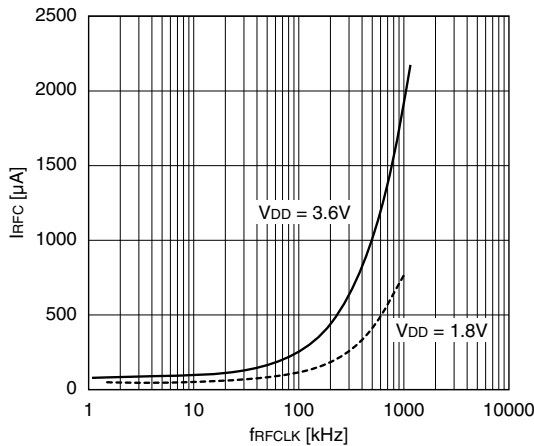

RFC reference/sensor oscillation current consumption-frequency characteristic
(Capacitive sensor DC oscillation mode)

$C_{REF}/C_{SEN} = 1000pF$, Typ. value

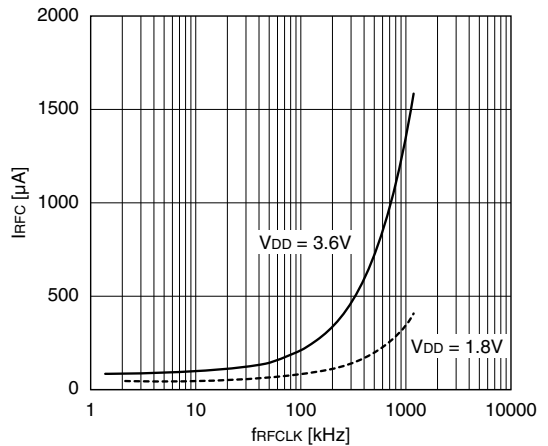

27.12 SVD Circuit Characteristics

Analog characteristics

Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = 25^\circ C$


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
SVD voltage	V_{SVD}	SVDC[3:0] = 0x0	Typ. × 0.96	–	Typ. × 1.04	V
		SVDC[3:0] = 0x1		1.8		V
		SVDC[3:0] = 0x2		1.9		V
		SVDC[3:0] = 0x3		2.0		V
		SVDC[3:0] = 0x4		2.1		V
		SVDC[3:0] = 0x5		2.2		V
		SVDC[3:0] = 0x6		2.3		V
		SVDC[3:0] = 0x7		2.4		V
		SVDC[3:0] = 0x8		2.5		V
		SVDC[3:0] = 0x9		2.6		V
		SVDC[3:0] = 0xa		2.7		V
		SVDC[3:0] = 0xb		2.8		V
		SVDC[3:0] = 0xc		2.9		V
		SVDC[3:0] = 0xd		3.0		V
		SVDC[3:0] = 0xe		3.1		V
SVDC[3:0] = 0xf	3.2	V				
SVD circuit-enable response time *1	t_{SVDEN}				500	μs
SVD circuit response time *2	t_{SVD}				60	μs

*1 This time is required to obtain stable detection results after SVDEN is altered from 0 to 1.

*2 This time is required to obtain stable detection results after SVDC[3:0] is altered.

SVD voltage-ambient temperature characteristic

SVDC[3:0] = 0xf, Typ. value

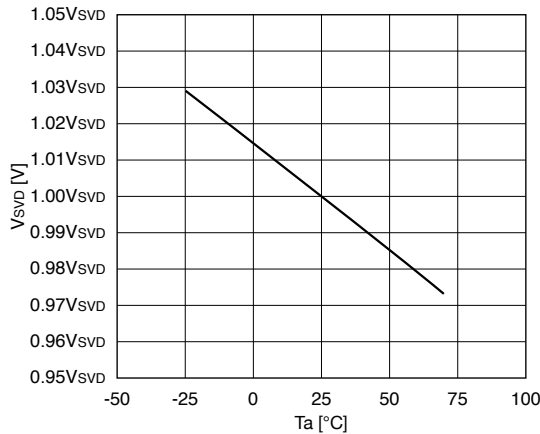

SVD circuit current consumption


Unless otherwise specified: $V_{DD} = 1.8$ to $3.6V$, $V_{SS} = 0V$, $T_a = 25^\circ C$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
SVD circuit current *1	ISVD0	$V_{DD} = 3.6V$, SVDC[3:0] = 0x1, SVDMD[1:0] = 0x0		8	15	μA
	ISVD1	$V_{DD} = 3.6V$, SVDC[3:0] = 0x1, SVDMD[1:0] = 0x1		6	11	μA
	ISVD2	$V_{DD} = 3.6V$, SVDC[3:0] = 0x1, SVDMD[1:0] = 0x2		4	7	μA
	ISVD3	$V_{DD} = 3.6V$, SVDC[3:0] = 0x1, SVDMD[1:0] = 0x3		2	3	μA

*1 This value is added to the current consumption during execution or current consumption during execution in heavy load protection mode when the SVD circuit is active.

SVD circuit current consumption voltage characteristic

Ta = 25°C, Typ. value

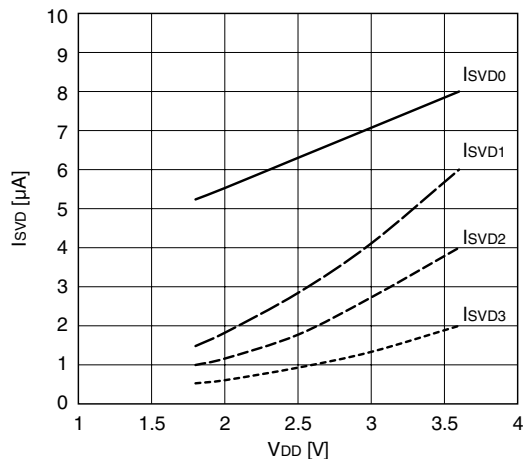**27.13 Flash Memory Characteristics****Analog characteristics**Unless otherwise specified: V_{DD} = 2.7 to 3.6V (VD1MD = 1), V_{SS} = 0V, Ta = -25 to 70°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Erase time *1	tSE	Erase 4K bytes			25	ms
Programming time *1	tBP	Program 16 bits			20	μs
Erase/program count *2	C _{FEP}		1000			times

*1 Data transfer and data verification are included and erase/program start control time is not included.

*2 The erase/program count assumes that "erasing + programming" or "overwrite programming" is one count and the programmed data is guaranteed to be retained for 10 years.

Flash memory current consumptionUnless otherwise specified: V_{DD} = 2.7 to 3.6V (VD1MD = 1), V_{SS} = 0V, Ta = 25°C, FLCYC[2:0] = 0x4 (1 cycle),


CCLKGR[1:0] = 0x0 (gear ratio 1/1)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Flash memory erasing current *1	I _{FERS}	When CPU runs with 8MHz, VD1MD = 1		7	14	mA
Flash memory programming current *2	I _{FPRG}	When CPU runs with 8MHz, VD1MD = 1		7	14	mA

*1 This value is added to the current consumption during execution when the Flash memory is being erased in self-programming mode.

*2 This value is added to the current consumption during execution when the Flash memory is being programmed in self-programming mode.

28 Basic External Connection Diagram

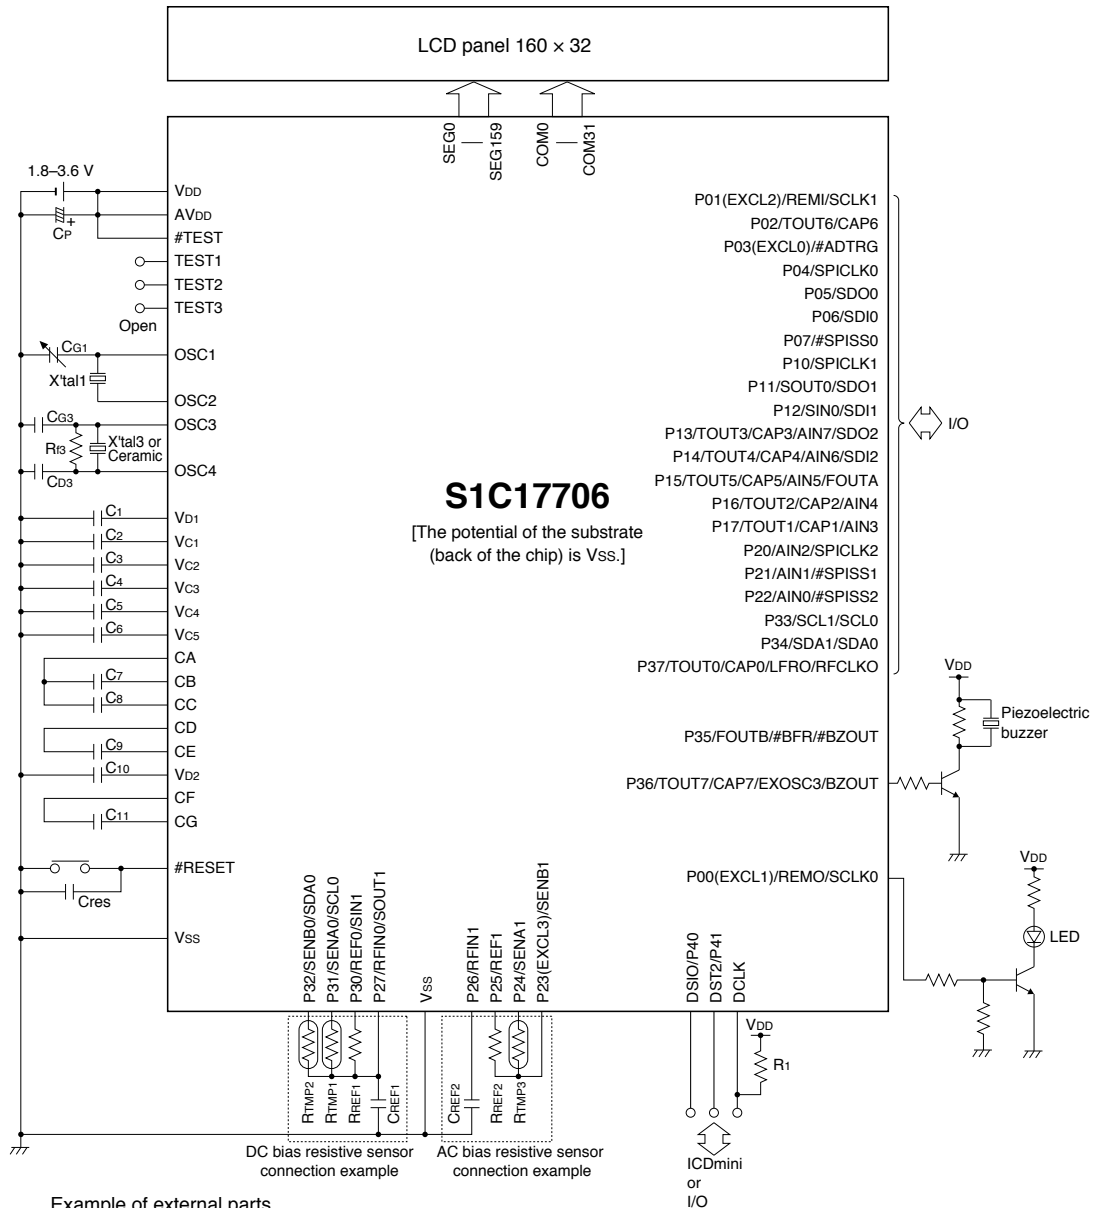


Example of external parts

Symbol	Name	Recommended value	Symbol	Name	Recommended value
X'tal1	Crystal resonator	32.768 kHz	C1	V _{D1} stabilizing capacitor	0.1 μF
C _{G1}	Trimmer capacitor or fixed capacitor	0 to 25 pF	C ₂ -C ₆	V _{C1} -V _{C5} stabilizing capacitors	0.1 μF
X'tal3	Crystal oscillator	0.2 to 8 MHz	C ₇ -C ₉	Booster capacitors	0.1 μF
Ceramic	Ceramic resonator	0.2 to 8 MHz	C ₁₀	V _{D2} stabilizing capacitor	0.1 μF
R _{f3}	Feedback resistor	1 MΩ	C ₁₁	Booster capacitor	0.1 μF
C _{G3}	Gate capacitor	15 to 30 pF	R ₁	DSIO pull-up resistor	10 kΩ
C _{D3}	Drain capacitor	15 to 30 pF	CREF1-2	Reference capacitors	-
Cres	Power-on reset capacitor	0.47 μF	RREF1-2	Reference resistors	-
C _P	Bypass capacitor	0.47 μF	RTMP1-3	Resistive sensors	-

29 Package

QFP22-256pin package

(Unit: mm)

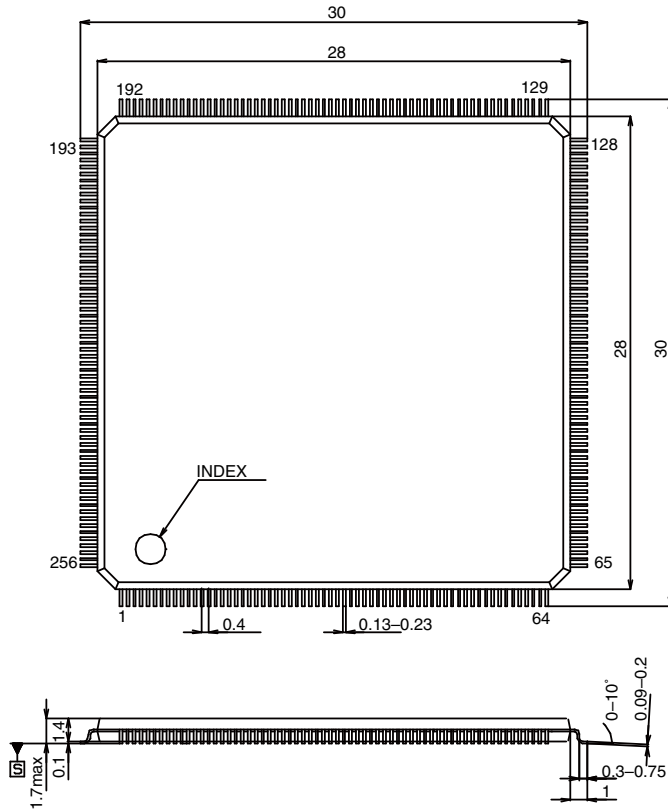

Appendix A List of I/O Registers

Internal peripheral circuit area 1 (0x4000–0x43ff)

Peripheral	Address	Register name		Function
MISC registers (8-bit device)	0x4020	MISC_DMODE1	Debug Mode Control Register 1	Enables peripheral operations in debug mode (PCLK).
UART (with IrDA) Ch.0 (8-bit device)	0x4100	UART_ST0	UART Ch.0 Status Register	Indicates transfer, buffer and error statuses.
	0x4101	UART_TXD0	UART Ch.0 Transmit Data Register	Transmit data
	0x4102	UART_RXD0	UART Ch.0 Receive Data Register	Receive data
	0x4103	UART_MOD0	UART Ch.0 Mode Register	Sets transfer data format.
	0x4104	UART_CTL0	UART Ch.0 Control Register	Controls data transfer.
	0x4105	UART_EXP0	UART Ch.0 Expansion Register	Sets IrDA mode.
	0x4106	UART_BR0	UART Ch.0 Baud Rate Register	Sets baud rate.
	0x4107	UART_FMD0	UART Ch.0 Fine Mode Register	Sets fine mode.
UART (with IrDA) Ch.1 (8-bit device)	0x4120	UART_ST1	UART Ch.1 Status Register	Indicates transfer, buffer and error statuses.
	0x4121	UART_TXD1	UART Ch.1 Transmit Data Register	Transmit data
	0x4122	UART_RXD1	UART Ch.1 Receive Data Register	Receive data
	0x4123	UART_MOD1	UART Ch.1 Mode Register	Sets transfer data format.
	0x4124	UART_CTL1	UART Ch.1 Control Register	Controls data transfer.
	0x4125	UART_EXP1	UART Ch.1 Expansion Register	Sets IrDA mode.
	0x4126	UART_BR1	UART Ch.1 Baud Rate Register	Sets baud rate.
	0x4127	UART_FMD1	UART Ch.1 Fine Mode Register	Sets fine mode.
16-bit timer Ch. 0 (16-bit device)	0x4200	T16_CLK0	T16 Ch.0 Count Clock Select Register	Selects a count clock.
	0x4202	T16_TR0	T16 Ch.0 Reload Data Register	Sets reload data.
	0x4204	T16_TC0	T16 Ch.0 Counter Data Register	Counter data
	0x4206	T16_CTL0	T16 Ch.0 Control Register	Sets the timer mode and starts/stops the timer.
	0x4208	T16_INT0	T16 Ch.0 Interrupt Control Register	Controls the interrupt.
16-bit timer Ch. 1 (16-bit device)	0x4220	T16_CLK1	T16 Ch.1 Count Clock Select Register	Selects a count clock.
	0x4222	T16_TR1	T16 Ch.1 Reload Data Register	Sets reload data.
	0x4224	T16_TC1	T16 Ch.1 Counter Data Register	Counter data
	0x4226	T16_CTL1	T16 Ch.1 Control Register	Sets the timer mode and starts/stops the timer.
	0x4228	T16_INT1	T16 Ch.1 Interrupt Control Register	Controls the interrupt.
16-bit timer Ch. 2 (16-bit device)	0x4240	T16_CLK2	T16 Ch.2 Count Clock Select Register	Selects a count clock.
	0x4242	T16_TR2	T16 Ch.2 Reload Data Register	Sets reload data.
	0x4244	T16_TC2	T16 Ch.2 Counter Data Register	Counter data
	0x4246	T16_CTL2	T16 Ch.2 Control Register	Sets the timer mode and starts/stops the timer.
	0x4248	T16_INT2	T16 Ch.2 Interrupt Control Register	Controls the interrupt.
16-bit timer Ch. 3 (16-bit device)	0x4260	T16_CLK3	T16 Ch.3 Count Clock Select Register	Selects a count clock.
	0x4262	T16_TR3	T16 Ch.3 Reload Data Register	Sets reload data.
	0x4264	T16_TC3	T16 Ch.3 Counter Data Register	Counter data
	0x4266	T16_CTL3	T16 Ch.3 Control Register	Sets the timer mode and starts/stops the timer.
	0x4268	T16_INT3	T16 Ch.3 Interrupt Control Register	Controls the interrupt.
16-bit timer Ch. 4 (16-bit device)	0x4280	T16_CLK4	T16 Ch.4 Count Clock Select Register	Selects a count clock.
	0x4282	T16_TR4	T16 Ch.4 Reload Data Register	Sets reload data.
	0x4284	T16_TC4	T16 Ch.4 Counter Data Register	Counter data
	0x4286	T16_CTL4	T16 Ch.4 Control Register	Sets the timer mode and starts/stops the timer.
	0x4288	T16_INT4	T16 Ch.4 Interrupt Control Register	Controls the interrupt.
Interrupt controller (16-bit device)	0x4306	ITC_LV0	Interrupt Level Setup Register 0	Sets the P0 and P1 interrupt levels.
	0x4308	ITC_LV1	Interrupt Level Setup Register 1	Sets the SWT, CT/RTC interrupt levels.
	0x430a	ITC_LV2	Interrupt Level Setup Register 2	Sets the T16A Ch.2 and SVD interrupt levels.
	0x430c	ITC_LV3	Interrupt Level Setup Register 3	Sets the LCD/SPI Ch.2 and T16A Ch.0 interrupt levels.
	0x430e	ITC_LV4	Interrupt Level Setup Register 4	Sets the T16 Ch.0/4 and Ch.1 interrupt levels.
	0x4310	ITC_LV5	Interrupt Level Setup Register 5	Sets the T16 Ch.2 and T16 Ch.3/T16A Ch.3 interrupt levels.
	0x4312	ITC_LV6	Interrupt Level Setup Register 6	Sets the UART Ch.0 and Ch.1 interrupt levels.
	0x4314	ITC_LV7	Interrupt Level Setup Register 7	Sets the SPI Ch.0 and I2CM interrupt levels.
	0x4316	ITC_LV8	Interrupt Level Setup Register 8	Sets the REMC/SPI Ch.1 and T16A Ch.1 interrupt levels.
	0x4318	ITC_LV9	Interrupt Level Setup Register 9	Sets the ADC10 and RFC interrupt levels.
	0x431a	ITC_LV10	Interrupt Level Setup Register 10	Sets the P2 and P3 interrupt levels.
	0x431c	ITC_LV11	Interrupt Level Setup Register 11	Sets the I2CS interrupt level.
	SPI Ch.0 (16-bit device)	0x4320	SPI_ST0	SPI Ch.0 Status Register
0x4322		SPI_TXD0	SPI Ch.0 Transmit Data Register	Transmit data
0x4324		SPI_RXD0	SPI Ch.0 Receive Data Register	Receive data
0x4326		SPI_CTL0	SPI Ch.0 Control Register	Sets the SPI mode and enables data transfer.

APPENDIX A LIST OF I/O REGISTERS

Peripheral	Address	Register name		Function
I ² C master (16-bit device)	0x4340	I2CM_EN	I ² C Master Enable Register	Enables the I ² C master module.
	0x4342	I2CM_CTL	I ² C Master Control Register	Controls the I ² C master operation and indicates transfer status.
	0x4344	I2CM_DAT	I ² C Master Data Register	Transmit/receive data
	0x4346	I2CM_ICTL	I ² C Master Interrupt Control Register	Controls the I ² C master interrupt.
I ² C slave (16-bit device)	0x4360	I2CS_TRNS	I ² C Slave Transmit Data Register	I ² C slave transmit data
	0x4362	I2CS_RECVR	I ² C Slave Receive Data Register	I ² C slave receive data
	0x4364	I2CS_SADRS	I ² C Slave Address Setup Register	Sets the I ² C slave address.
	0x4366	I2CS_CTL	I ² C Slave Control Register	Controls the I ² C slave module.
	0x4368	I2CS_STAT	I ² C Slave Status Register	Indicates the I ² C bus status.
	0x436a	I2CS_ASTAT	I ² C Slave Access Status Register	Indicates the I ² C slave access status.
	0x436c	I2CS_ICTL	I ² C Slave Interrupt Control Register	Controls the I ² C slave interrupt.
SPI Ch.1 (16-bit device)	0x4380	SPI_ST1	SPI Ch.1 Status Register	Indicates transfer and buffer statuses.
	0x4382	SPI_TXD1	SPI Ch.1 Transmit Data Register	Transmit data
	0x4384	SPI_RXD1	SPI Ch.1 Receive Data Register	Receive data
	0x4386	SPI_CTL1	SPI Ch.1 Control Register	Sets the SPI mode and enables data transfer.
SPI Ch.2 (16-bit device)	0x43a0	SPI_ST2	SPI Ch.2 Status Register	Indicates transfer and buffer statuses.
	0x43a2	SPI_TXD2	SPI Ch.2 Transmit Data Register	Transmit data
	0x43a4	SPI_RXD2	SPI Ch.2 Receive Data Register	Receive data
	0x43a6	SPI_CTL2	SPI Ch.2 Control Register	Sets the SPI mode and enables data transfer.

Internal Peripheral Circuit Area 2 (0x5000–0x5fff)

Peripheral	Address	Register name		Function
Clock timer (8-bit device)	0x5000	CT_CTL	Clock Timer Control Register	Resets and starts/stops the timer.
	0x5001	CT_CNT	Clock Timer Counter Register	Counter data
	0x5002	CT_IMSK	Clock Timer Interrupt Mask Register	Enables/disables interrupt.
	0x5003	CT_IFLG	Clock Timer Interrupt Flag Register	Indicates/resets interrupt occurrence status.
Stopwatch timer (8-bit device)	0x5020	SWT_CTL	Stopwatch Timer Control Register	Resets and starts/stops the timer.
	0x5021	SWT_BCNT	Stopwatch Timer BCD Counter Register	BCD counter data
	0x5022	SWT_IMSK	Stopwatch Timer Interrupt Mask Register	Enables/disables interrupt.
Watchdog timer (8-bit device)	0x5040	WDT_CTL	Watchdog Timer Control Register	Resets and starts/stops the timer.
	0x5041	WDT_ST	Watchdog Timer Status Register	Sets the timer mode and indicates NMI status.
	Clock generator (8-bit device)	0x5060	CLG_SRC	Clock Source Select Register
0x5061		CLG_CTL	Oscillation Control Register	Controls oscillation.
0x5062		CLG_SLPCTL	Sleep Control Register	Controls oscillation in SLEEP mode.
0x5063		LCD_CLK	LCD Clock Select Register	Selects the LCD clock.
0x5064		CLG_FOUTA	FOUTA Control Register	Controls FOUTA clock output.
0x5065		CLG_FOUTB	FOUTB Control Register	Controls FOUTB clock output.
0x5066		SVD_CLK	SVD Clock Control Register	Selects the SVD operating clock.
0x5067		RFC_CLK	RFC Clock Control Register	Selects the RFC operating clock.
0x5068		T16A_CLK0	T16A Clock Control Register Ch.0	Controls the T16A Ch.0 clock.
0x5069		T16A_CLK1	T16A Clock Control Register Ch.1	Controls the T16A Ch.1 clock.
0x506a		T16A_CLK2	T16A Clock Control Register Ch.2	Controls the T16A Ch.2 clock.
0x506b		T16A_CLK3	T16A Clock Control Register Ch.3	Controls the T16A Ch.3 clock.
0x506c		UART_CLK0	UART Ch.0 Clock Control Register	Selects the baud rate generator clock.
0x506d		UART_CLK1	UART Ch.1 Clock Control Register	Selects the baud rate generator clock.
0x506f		SND_CLK	SND Clock Control Register	Controls the SND operating clock.
0x5070		WDT_CLK	WDT Clock Control Register	Controls the WDT operating clock.
0x5080		CLG_PCLK	PCLK Control Register	Controls the PCLK supply.
0x5081		CLG_CCLK	CCLK Control Register	Configures the CCLK division ratio.
LCD driver (8-bit device)		0x50a0	LCD_DCTL	LCD Display Control Register
	0x50a1	LCD_CADJ	LCD Contrast Adjustment Register	Controls the contrast.
	0x50a2	LCD_CCTL	LCD Clock Control Register	Controls the LCD drive duty.
	0x50a3	LCD_VREG	LCD Voltage Regulator Control Register	Controls the LCD drive voltage regulator.
	0x50a4	LCD_PWR	LCD Power Voltage Booster Control Register	Controls the LCD voltage booster.
	0x50a5	LCD_IMSK	LCD Interrupt Mask Register	Enables/disables interrupts.
	0x50a6	LCD_IFLG	LCD Interrupt Flag Register	Indicates/resets interrupt occurrence status.
SVD circuit (8-bit device)	0x5100	SVD_EN	SVD Enable Register	Enables/disables the SVD operation.
	0x5101	SVD_CMP	SVD Comparison Voltage Register	Sets the comparison voltage.
	0x5102	SVD_RSLT	SVD Detection Result Register	Voltage detection results
	0x5103	SVD_IMSK	SVD Interrupt Mask Register	Enables/disables interrupts.
	0x5104	SVD_IFLG	SVD Interrupt Flag Register	Indicates/resets interrupt occurrence status.
Power generator (8-bit device)	0x5120	VD1_CTL	VD ₁ Control Register	Controls the VD ₁ voltage and heavy load protection mode.
	0x5122	VD1_SEL	VD ₁ Select Register	Selects the VD ₁ regulator output level.

Peripheral	Address	Register name		Function
Real-time clock (8-bit device)	0x5140	RTC_IFLG	RTC Interrupt Flag Register	Indicates/resets real-time clock occurrence status.
	0x5141	RTC_IMSK	RTC Interrupt Mask Register	Sets up real-time clock interrupt mask.
	0x5142	RTC_CNTL0	RTC Control 0 Register	Controls the real-time clock.
	0x5143	RTC_CNTL1	RTC Control 1 Register	
	0x5144	RTC_SEC	RTC Second Register	Second counter data
	0x5145	RTC_MIN	RTC Minute Register	Minute counter data
	0x5146	RTC_HOUR	RTC Hour Register	Hour counter data
	0x5147	RTC_DAY	RTC Day Register	Day counter data
	0x5148	RTC_MONTH	RTC Month Register	Month counter data
	0x5149	RTC_YEAR	RTC Year Register	Year counter data
	0x514a	RTC_WEEK	RTC Week Register	Days of week counter data
	0x514b	RTC_1HZ	RTC 1Hz Register	1-second or less counter data

APPENDIX A LIST OF I/O REGISTERS

Peripheral	Address	Register name		Function
P port & port MUX (8-bit device)	0x5200	P0_IN	P0 Port Input Data Register	P0 port input data
	0x5201	P0_OUT	P0 Port Output Data Register	P0 port output data
	0x5202	P0_OEN	P0 Port Output Enable Register	Enables P0 port outputs.
	0x5203	P0_PU	P0 Port Pull-up Control Register	Controls the P0 port pull-up resistor.
	0x5204	P0_SM	P0 Port Schmitt Trigger Control Register	Controls the P0 port Schmitt trigger input.
	0x5205	P0_IMSK	P0 Port Interrupt Mask Register	Enables P0 port interrupts.
	0x5206	P0_EDGE	P0 Port Interrupt Edge Select Register	Selects the signal edge for generating P0 port interrupts.
	0x5207	P0_IFLG	P0 Port Interrupt Flag Register	Indicates/resets the P0 port interrupt occurrence status.
	0x5208	P0_CHAT	P0 Port Chattering Filter Control Register	Controls the P0 port chattering filter.
	0x5209	P0_KRST	P0 Port Key-Entry Reset Configuration Register	Configures the P0 port key-entry reset function.
	0x520a	P0_IEN	P0 Port Input Enable Register	Enables P0 port inputs.
	0x5210	P1_IN	P1 Port Input Data Register	P1 port input data
	0x5211	P1_OUT	P1 Port Output Data Register	P1 port output data
	0x5212	P1_OEN	P1 Port Output Enable Register	Enables P1 port outputs.
	0x5213	P1_PU	P1 Port Pull-up Control Register	Controls the P1 port pull-up resistor.
	0x5214	P1_SM	P1 Port Schmitt Trigger Control Register	Controls the P1 port Schmitt trigger input.
	0x5215	P1_IMSK	P1 Port Interrupt Mask Register	Enables P1 port interrupts.
	0x5216	P1_EDGE	P1 Port Interrupt Edge Select Register	Selects the signal edge for generating P1 port interrupts.
	0x5217	P1_IFLG	P1 Port Interrupt Flag Register	Indicates/resets the P1 port interrupt occurrence status.
	0x5218	P1_CHAT	P1 Port Chattering Filter Control Register	Controls the P1 port chattering filter.
	0x521a	P1_IEN	P1 Port Input Enable Register	Enables P1 port inputs.
	0x5220	P2_IN	P2 Port Input Data Register	P2 port input data
	0x5221	P2_OUT	P2 Port Output Data Register	P2 port output data
	0x5222	P2_OEN	P2 Output Enable Register	Enables P2 port outputs.
	0x5223	P2_PU	P2 Port Pull-up Control Register	Controls the P2 port pull-up resistor.
	0x5224	P2_SM	P2 Port Schmitt Trigger Control Register	Controls the P2 port Schmitt trigger input.
	0x5225	P2_IMSK	P2 Port Interrupt Mask Register	Enables P2 port interrupts.
	0x5226	P2_EDGE	P2 Port Interrupt Edge Select Register	Selects the signal edge for generating P2 port interrupts.
	0x5227	P2_IFLG	P2 Port Interrupt Flag Register	Indicates/resets the P2 port interrupt occurrence status.
	0x5228	P2_CHAT	P2 Port Chattering Filter Control Register	Controls the P2 port chattering filter.
	0x522a	P2_IEN	P2 Port Input Enable Register	Enables P2 port inputs.
	0x5230	P3_IN	P3 Port Input Data Register	P3 port input data
	0x5231	P3_OUT	P3 Port Output Data Register	P3 port output data
	0x5232	P3_OEN	P3 Port Output Enable Register	Enables P3 port outputs.
	0x5233	P3_PU	P3 Port Pull-up Control Register	Controls the P3 port pull-up resistor.
	0x5234	P3_SM	P3 Port Schmitt Trigger Control Register	Controls the P3 port Schmitt trigger input.
	0x5235	P3_IMSK	P3 Port Interrupt Mask Register	Enables P3 port interrupts.
	0x5236	P3_EDGE	P3 Port Interrupt Edge Select Register	Selects the signal edge for generating P3 port interrupts.
	0x5237	P3_IFLG	P3 Port Interrupt Flag Register	Indicates/resets the P3 port interrupt occurrence status.
	0x5238	P3_CHAT	P3 Port Chattering Filter Control Register	Controls the P3 port chattering filter.
	0x523a	P3_IEN	P3 Port Input Enable Register	Enables P3 port inputs.
	0x5240	P4_IN	P4 Port Input Data Register	P4 port input data
	0x5241	P4_OUT	P4 Port Output Data Register	P4 port output data
	0x5242	P4_OEN	P4 Port Output Enable Register	Enables P4 port outputs.
	0x5243	P4_PU	P4 Port Pull-up Control Register	Controls the P4 port pull-up resistor.
	0x5244	P4_SM	P4 Port Schmitt Trigger Control Register	Controls the P4 port Schmitt trigger input.
	0x524a	P4_IEN	P4 Port Input Enable Register	Enables P4 port inputs.
	0x52a0	P00_03PMUX	P0[3:0] Port Function Select Register	Selects the P0[3:0] port functions.
0x52a1	P04_07PMUX	P0[7:4] Port Function Select Register	Selects the P0[7:4] port functions.	
0x52a2	P10_13PMUX	P1[3:0] Port Function Select Register	Selects the P1[3:0] port functions.	
0x52a3	P14_17PMUX	P1[7:4] Port Function Select Register	Selects the P1[7:4] port functions.	
0x52a4	P20_23PMUX	P2[3:0] Port Function Select Register	Selects the P2[3:0] port functions.	
0x52a5	P24_27PMUX	P2[7:4] Port Function Select Register	Selects the P2[7:4] port functions.	
0x52a6	P30_33PMUX	P3[3:0] Port Function Select Register	Selects the P3[3:0] port functions.	
0x52a7	P34_37PMUX	P3[7:4] Port Function Select Register	Selects the P3[7:4] port functions.	
0x52a8	P40_42PMUX	P4[2:0] Port Function Select Register	Selects the P4[2:0] port functions.	

Peripheral	Address	Register name		Function
MISC registers (16-bit device)	0x5320	MISC_FL	FLASHC/SRAMC Control Register	Sets FLASHC/SRAMC access condition.
	0x5322	MISC_DMODE2	Debug Mode Control Register 2	Enables peripheral operations in debug mode (except PCLK).
	0x5324	MISC_PROT	MISC Protect Register	Enables writing to the MISC registers.
	0x5326	MISC_IRAMSZ	IRAM Size Select Register	Selects the IRAM size.
	0x5328	MISC_TTBRL	Vector Table Address Low Register	Sets vector table address.
	0x532a	MISC_TTBRLH	Vector Table Address High Register	
	0x532c	MISC_PSR	PSR Register	Indicates the S1C17 Core PSR values.
IR remote controller (16-bit device)	0x5340	REMC_CFG	REMC Configuration Register	Controls the clock and data transfer.
	0x5342	REMC_CAR	REMC Carrier Length Setup Register	Sets the carrier H/L section lengths.
	0x5344	REMC_LCNT	REMC Length Counter Register	Sets the transmit/receive data length.
	0x5346	REMC_INT	REMC Interrupt Control Register	Controls interrupts.
A/D converter (16-bit device)	0x5380	ADC10_ADD	A/D Conversion Result Register	A/D converted data
	0x5382	ADC10_TRG	A/D Trigger/Channel Select Register	Sets start/end channels and conversion mode.
	0x5384	ADC10_CTL	A/D Control/Status Register	Controls A/D converter and indicates conversion status.
	0x5386	ADC10_CLK	A/D Clock Control Register	Controls A/D converter clock.
R/F converter (16-bit device)	0x53a0	RFC_CTL	RFC Control Register	Controls R/F converter.
	0x53a2	RFC_TRG	RFC Oscillation Trigger Register	Controls oscillations.
	0x53a4	RFC_MCL	RFC Measurement Counter Low Register	Measurement counter data
	0x53a6	RFC_MCH	RFC Measurement Counter High Register	
	0x53a8	RFC_TCL	RFC Time Base Counter Low Register	Time base counter data
	0x53aa	RFC_TCH	RFC Time Base Counter High Register	
	0x53ac	RFC_IMSK	RFC Interrupt Mask Register	Enables/disables interrupts.
	0x53ae	RFC_IFLG	RFC Interrupt Flag Register	Indicates/resets interrupt occurrence status.
16-bit PWM timer Ch.0 (16-bit device)	0x5400	T16A_CTL0	T16A Counter Ch.0 Control Register	Controls the counter.
	0x5402	T16A_TC0	T16A Counter Ch.0 Data Register	Counter data
	0x5404	T16A_CCCTL0	T16A Comparator/Capture Ch.0 Control Register	Controls the comparator/capture block and TOUT.
	0x5406	T16A_CCA0	T16A Compare/Capture Ch.0 A Data Register	Compare A/capture A data
	0x5408	T16A_CCB0	T16A Compare/Capture Ch.0 B Data Register	Compare B/capture B data
	0x540a	T16A_IEN0	T16A Compare/Capture Ch.0 Interrupt Enable Register	Enables/disables interrupts.
	0x540c	T16A_IFLG0	T16A Compare/Capture Ch.0 Interrupt Flag Register	Displays/sets interrupt occurrence status.
	16-bit PWM timer Ch.1 (16-bit device)	0x5420	T16A_CTL1	T16A Counter Ch.1 Control Register
0x5422		T16A_TC1	T16A Counter Ch.1 Data Register	Counter data
0x5424		T16A_CCCTL1	T16A Comparator/Capture Ch.1 Control Register	Controls the comparator/capture block and TOUT.
0x5426		T16A_CCA1	T16A Compare/Capture Ch.1 A Data Register	Compare A/capture A data
0x5428		T16A_CCB1	T16A Compare/Capture Ch.1 B Data Register	Compare B/capture B data
0x542a		T16A_IEN1	T16A Compare/Capture Ch.1 Interrupt Enable Register	Enables/disables interrupts.
0x542c		T16A_IFLG1	T16A Compare/Capture Ch.1 Interrupt Flag Register	Displays/sets interrupt occurrence status.
16-bit PWM timer Ch.2 (16-bit device)		0x5440	T16A_CTL2	T16A Counter Ch.2 Control Register
	0x5442	T16A_TC2	T16A Counter Ch.2 Data Register	Counter data
	0x5444	T16A_CCCTL2	T16A Comparator/Capture Ch.2 Control Register	Controls the comparator/capture block and TOUT.
	0x5446	T16A_CCA2	T16A Compare/Capture Ch.2 A Data Register	Compare A/capture A data
	0x5448	T16A_CCB2	T16A Compare/Capture Ch.2 B Data Register	Compare B/capture B data
	0x544a	T16A_IEN2	T16A Compare/Capture Ch.2 Interrupt Enable Register	Enables/disables interrupts.
	0x544c	T16A_IFLG2	T16A Compare/Capture Ch.2 Interrupt Flag Register	Displays/sets interrupt occurrence status.
16-bit PWM timer Ch.3 (16-bit device)	0x5460	T16A_CTL3	T16A Counter Ch.3 Control Register	Controls the counter.
	0x5462	T16A_TC3	T16A Counter Ch.3 Data Register	Counter data
	0x5464	T16A_CCCTL3	T16A Comparator/Capture Ch.3 Control Register	Controls the comparator/capture block and TOUT.
	0x5466	T16A_CCA3	T16A Compare/Capture Ch.3 A Data Register	Compare A/capture A data
	0x5468	T16A_CCB3	T16A Compare/Capture Ch.3 B Data Register	Compare B/capture B data
	0x546a	T16A_IEN3	T16A Compare/Capture Ch.3 Interrupt Enable Register	Enables/disables interrupts.
	0x546c	T16A_IFLG3	T16A Compare/Capture Ch.3 Interrupt Flag Register	Displays/sets interrupt occurrence status.

Core I/O Reserved Area (0xffff84–0xffffd0)

Peripheral	Address	Register name		Function
S1C17 Core I/O	0xffff84	IDIR	Processor ID Register	Indicates the processor ID.
	0xffff90	DBRAM	Debug RAM Base Register	Indicates the debug RAM base address.
	0xffffa0	DCR	Debug Control Register	Controls debugging.
	0xffffb4	IBAR1	Instruction Break Address Register 1	Sets instruction break address #1.
	0xffffb8	IBAR2	Instruction Break Address Register 2	Sets instruction break address #2.
	0xffffbc	IBAR3	Instruction Break Address Register 3	Sets instruction break address #3.
	0xffffd0	IBAR4	Instruction Break Address Register 4	Sets instruction break address #4.

Note: Addresses marked as “Reserved” or unused peripheral circuit areas not marked in the table must not be accessed by application programs.

0x4100–0x4107, 0x506c

UART (with IrDA) Ch.0

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks			
UART Ch.0 Status Register (UART_ST0)	0x4100 (8 bits)	D7	TRED	End of transmission flag	1	Completed	0	Not completed	0	R/W	Reset by writing 1.	
		D6	FER	Framing error flag	1	Error	0	Normal	0	R/W		
		D5	PER	Parity error flag	1	Error	0	Normal	0	R/W		
		D4	OER	Overrun error flag	1	Error	0	Normal	0	R/W		
		D3	RD2B	Second byte receive flag	1	Ready	0	Empty	0	R		
		D2	TRBS	Transmit busy flag	1	Busy	0	Idle	0	R		Shift register status
		D1	RDRY	Receive data ready flag	1	Ready	0	Empty	0	R		
		D0	TDBE	Transmit data buffer empty flag	1	Empty	0	Not empty	1	R		
UART Ch.0 Transmit Data Register (UART_TXD0)	0x4101 (8 bits)	D7–0	TXD[7:0]	Transmit data TXD7(6) = MSB TXD0 = LSB	0x0 to 0xff (0x7f)		0x0	R/W				
UART Ch.0 Receive Data Register (UART_RXD0)	0x4102 (8 bits)	D7–0	RXD[7:0]	Receive data in the receive data buffer RXD7(6) = MSB RXD0 = LSB	0x0 to 0xff (0x7f)		0x0	R	Older data in the buffer is read out first.			
UART Ch.0 Mode Register (UART_MOD0)	0x4103 (8 bits)	D7–5	–	reserved	–		–	–	0 when being read.			
		D4	CHLN	Character length select	1	8 bits	0	7 bits	0	R/W		
		D3	PREN	Parity enable	1	With parity	0	No parity	0	R/W		
		D2	PMD	Parity mode select	1	Odd	0	Even	0	R/W		
		D1	STPB	Stop bit select	1	2 bits	0	1 bit	0	R/W		
		D0	–	reserved	–		–	–	–	0 when being read.		
UART Ch.0 Control Register (UART_CTL0)	0x4104 (8 bits)	D7	TEIEN	End of transmission int. enable	1	Enable	0	Disable	0	R/W		
		D6	REIEN	Receive error int. enable	1	Enable	0	Disable	0	R/W		
		D5	RIEN	Receive buffer full int. enable	1	Enable	0	Disable	0	R/W		
		D4	TIEN	Transmit buffer empty int. enable	1	Enable	0	Disable	0	R/W		
		D3–2	–	reserved	–		–	–	–	0 when being read.		
		D1	RBFI	Receive buffer full int. condition setup	1	2 bytes	0	1 byte	0	R/W		
D0	RXEN	UART enable	1	Enable	0	Disable	0	R/W				
UART Ch.0 Expansion Register (UART_EXP0)	0x4105 (8 bits)	D7–1	–	reserved	–		–	–	0 when being read.			
		D0	IRMD	IrDA mode select	1	On	0	Off	0	R/W		
UART Ch.0 Baud Rate Register (UART_BR0)	0x4106 (8 bits)	D7–0	BR[7:0]	Baud rate setting	0x0 to 0xff		0x0	R/W				
UART Ch.0 Fine Mode Register (UART_FMD0)	0x4107 (8 bits)	D7–4	–	reserved	–		–	–	0 when being read.			
		D3–0	FMD[3:0]	Fine mode setup	0x0 to 0xf		0x0	R/W	Set a number of times to insert delay into a 16-underflow period.			
UART Ch.0 Clock Control Register (UART_CLK0)	0x506c (8 bits)	D7–6	–	reserved	–		–	–	0 when being read.			
		D5–4	CLKDIV [1:0]	Clock division ratio select	CLKDIV[1:0]		Division ratio	0x0	R/W	When the clock source is IOSC or OSC3		
					0x3	1/8						
					0x2	1/4						
					0x1	1/2						
		D3–2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0]		Clock source	0x0	R/W			
0x3	External clock											
0x2	OSC3											
0x1	OSC1											
0x0	IOSC											
D1	–	reserved	–		–	–	–	0 when being read.				
D0	CLKEN	Count clock enable	1	Enable	0	Disable	0	R/W				

0x4120–0x4127, 0x506d

UART (with IrDA) Ch.1

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks			
UART Ch.1 Status Register (UART_ST1)	0x4120 (8 bits)	D7	TRED	End of transmission flag	1	Completed	0	Not completed	0	R/W	Reset by writing 1.	
		D6	FER	Framing error flag	1	Error	0	Normal	0	R/W		
		D5	PER	Parity error flag	1	Error	0	Normal	0	R/W		
		D4	OER	Overrun error flag	1	Error	0	Normal	0	R/W		
		D3	RD2B	Second byte receive flag	1	Ready	0	Empty	0	R		
		D2	TRBS	Transmit busy flag	1	Busy	0	Idle	0	R		Shift register status
		D1	RDRY	Receive data ready flag	1	Ready	0	Empty	0	R		
D0	TDBE	Transmit data buffer empty flag	1	Empty	0	Not empty	1	R				
UART Ch.1 Transmit Data Register (UART_TXD1)	0x4121 (8 bits)	D7–0	TXD[7:0]	Transmit data TXD7(6) = MSB TXD0 = LSB	0x0 to 0xff (0x7f)		0x0	R/W				
UART Ch.1 Receive Data Register (UART_RXD1)	0x4122 (8 bits)	D7–0	RXD[7:0]	Receive data in the receive data buffer RXD7(6) = MSB RXD0 = LSB	0x0 to 0xff (0x7f)		0x0	R	Older data in the buffer is read out first.			
UART Ch.1 Mode Register (UART_MOD1)	0x4123 (8 bits)	D7–5	–	reserved	–		–	–	0 when being read.			
		D4	CHLN	Character length select	1	8 bits	0	7 bits	0	R/W		
		D3	PREN	Parity enable	1	With parity	0	No parity	0	R/W		
		D2	PMD	Parity mode select	1	Odd	0	Even	0	R/W		
		D1	STPB	Stop bit select	1	2 bits	0	1 bit	0	R/W		
D0	–	reserved	–		–	–	–	0 when being read.				
UART Ch.1 Control Register (UART_CTL1)	0x4124 (8 bits)	D7	TEIEN	End of transmission int. enable	1	Enable	0	Disable	0	R/W		
		D6	REIEN	Receive error int. enable	1	Enable	0	Disable	0	R/W		
		D5	RIEN	Receive buffer full int. enable	1	Enable	0	Disable	0	R/W		
		D4	TIEN	Transmit buffer empty int. enable	1	Enable	0	Disable	0	R/W		
		D3–2	–	reserved	–		–	–	–	0 when being read.		
		D1	RBFIF	Receive buffer full int. condition setup	1	2 bytes	0	1 byte	0	R/W		
D0	RXEN	UART enable	1	Enable	0	Disable	0	R/W				
UART Ch.1 Expansion Register (UART_EXP1)	0x4125 (8 bits)	D7–1	–	reserved	–		–	–	0 when being read.			
		D0	IRMD	IrDA mode select	1	On	0	Off	0	R/W		
UART Ch.1 Baud Rate Register (UART_BR1)	0x4126 (8 bits)	D7–0	BR[7:0]	Baud rate setting	0x0 to 0xff		0x0	R/W				
UART Ch.1 Fine Mode Register (UART_FMD1)	0x4127 (8 bits)	D7–4	–	reserved	–		–	–	0 when being read.			
		D3–0	FMD[3:0]	Fine mode setup	0x0 to 0xf		0x0	R/W	Set a number of times to insert delay into a 16-underflow period.			
UART Ch.1 Clock Control Register (UART_CLK1)	0x506d (8 bits)	D7–6	–	reserved	–		–	–	0 when being read.			
		D5–4	CLKDIV [1:0]	Clock division ratio select	CLKDIV[1:0]	Division ratio	0x0	R/W	When the clock source is IOSC or OSC3			
					0x3	1/8						
					0x2	1/4						
					0x1	1/2						
D3–2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0]	Clock source	0x0	R/W						
0x3			External clock									
0x2			OSC3									
0x1			OSC1									
D1	–	reserved	–		–	–	0 when being read.					
D0	CLKEN	Count clock enable	1	Enable	0	Disable	0	R/W				

0x4200–0x4208 **16-bit Timer Ch.0**

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
T16 Ch.0 Count Clock Select Register (T16_CLK0)	0x4200 (16 bits)	D15–4	–	reserved	Count clock division ratio select	–	–	0 when being read.		
		D3–0	DF[3:0]	DF[3:0]		Division ratio	0x0	R/W	Source clock = PCLK	
						0xf	reserved			
						0xe	1/16384			
						0xd	1/8192			
						0xc	1/4096			
						0xb	1/2048			
						0xa	1/1024			
						0x9	1/512			
						0x8	1/256			
						0x7	1/128			
						0x6	1/64			
						0x5	1/32			
			0x4	1/16						
			0x3	1/8						
			0x2	1/4						
			0x1	1/2						
			0x0	1/1						
T16 Ch.0 Reload Data Register (T16_TR0)	0x4202 (16 bits)	D15–0	TR[15:0]	Reload data TR15 = MSB TR0 = LSB	0x0 to 0xffff	0x0	R/W			
T16 Ch.0 Counter Data Register (T16_TC0)	0x4204 (16 bits)	D15–0	TC[15:0]	Counter data TC15 = MSB TC0 = LSB	0x0 to 0xffff	0xffff	R			
T16 Ch.0 Control Register (T16_CTL0)	0x4206 (16 bits)	D15–5	–	reserved	–	–	–	Do not write 1.		
		D4	TRMD	Count mode select	1 One shot 0 Repeat	0	R/W			
		D3–2	–	reserved	–	–	–	0 when being read.		
		D1	PRESER	Timer reset	1 Reset 0 Ignored	0	W			
		D0	PRUN	Timer run/stop control	1 Run 0 Stop	0	R/W			
T16 Ch.0 Interrupt Control Register (T16_INT0)	0x4208 (16 bits)	D15–9	–	reserved	–	–	–	0 when being read.		
		D8	T16IE	T16 interrupt enable	1 Enable 0 Disable	0	R/W			
		D7–1	–	reserved	–	–	–	0 when being read.		
		D0	T16IF	T16 interrupt flag	1 Cause of interrupt occurred 0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.		

0x4220–0x4228 **16-bit Timer Ch.1**

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
T16 Ch.1 Count Clock Select Register (T16_CLK1)	0x4220 (16 bits)	D15–4	–	reserved	Count clock division ratio select	–	–	0 when being read.		
		D3–0	DF[3:0]	DF[3:0]		Division ratio	0x0	R/W	Source clock = PCLK	
						0xf	reserved			
						0xe	1/16384			
						0xd	1/8192			
						0xc	1/4096			
						0xb	1/2048			
						0xa	1/1024			
						0x9	1/512			
						0x8	1/256			
						0x7	1/128			
						0x6	1/64			
						0x5	1/32			
			0x4	1/16						
			0x3	1/8						
			0x2	1/4						
			0x1	1/2						
			0x0	1/1						
T16 Ch.1 Reload Data Register (T16_TR1)	0x4222 (16 bits)	D15–0	TR[15:0]	Reload data TR15 = MSB TR0 = LSB	0x0 to 0xffff	0x0	R/W			
T16 Ch.1 Counter Data Register (T16_TC1)	0x4224 (16 bits)	D15–0	TC[15:0]	Counter data TC15 = MSB TC0 = LSB	0x0 to 0xffff	0xffff	R			
T16 Ch.1 Control Register (T16_CTL1)	0x4226 (16 bits)	D15–5	–	reserved	–	–	–	Do not write 1.		
		D4	TRMD	Count mode select	1 One shot 0 Repeat	0	R/W			
		D3–2	–	reserved	–	–	–	0 when being read.		
		D1	PRESER	Timer reset	1 Reset 0 Ignored	0	W			
		D0	PRUN	Timer run/stop control	1 Run 0 Stop	0	R/W			

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16 Ch.1 Interrupt Control Register (T16_INT1)	0x4228 (16 bits)	D15-9	–	reserved	–	–	–	0 when being read.	
		D8	T16IE	T16 interrupt enable	1 Enable 0 Disable	0	R/W	–	
		D7-1	–	reserved	–	–	–	–	0 when being read.
		D0	T16IF	T16 interrupt flag	1 Cause of interrupt occurred 0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.	

0x4240–0x4248

16-bit Timer Ch.2

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16 Ch.2 Count Clock Select Register (T16_CLK2)	0x4240 (16 bits)	D15-4	–	reserved	–	–	–	0 when being read.	
		D3-0	DF[3:0]	Count clock division ratio select	DF[3:0] Division ratio	0x0	R/W	Source clock = PCLK	
					0xf reserved				
					0xe 1/16384				
					0xd 1/8192				
					0xc 1/4096				
					0xb 1/2048				
					0xa 1/1024				
					0x9 1/512				
					0x8 1/256				
					0x7 1/128				
					0x6 1/64				
					0x5 1/32				
					0x4 1/16				
T16 Ch.2 Reload Data Register (T16_TR2)	0x4242 (16 bits)	D15-0	TR[15:0]	Reload data TR15 = MSB TR0 = LSB	0x0 to 0xffff	0x0	R/W		
T16 Ch.2 Counter Data Register (T16_TC2)	0x4244 (16 bits)	D15-0	TC[15:0]	Counter data TC15 = MSB TC0 = LSB	0x0 to 0xffff	0xffff	R		
T16 Ch.2 Control Register (T16_CTL2)	0x4246 (16 bits)	D15-5	–	reserved	–	–	–	Do not write 1.	
		D4	TRMD	Count mode select	1 One shot 0 Repeat	0	R/W	–	
		D3-2	–	reserved	–	–	–	–	0 when being read.
		D1	PRESER	Timer reset	1 Reset 0 Ignored	0	W	–	
		D0	PRUN	Timer run/stop control	1 Run 0 Stop	0	R/W	–	
T16 Ch.2 Interrupt Control Register (T16_INT2)	0x4248 (16 bits)	D15-9	–	reserved	–	–	–	0 when being read.	
		D8	T16IE	T16 interrupt enable	1 Enable 0 Disable	0	R/W	–	
		D7-1	–	reserved	–	–	–	–	0 when being read.
		D0	T16IF	T16 interrupt flag	1 Cause of interrupt occurred 0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.	

0x4260–0x4268

16-bit Timer Ch.3

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16 Ch.3 Count Clock Select Register (T16_CLK3)	0x4260 (16 bits)	D15-4	–	reserved	–	–	–	0 when being read.	
		D3-0	DF[3:0]	Count clock division ratio select	DF[3:0] Division ratio	0x0	R/W	Source clock = PCLK	
					0xf reserved				
					0xe 1/16384				
					0xd 1/8192				
					0xc 1/4096				
					0xb 1/2048				
					0xa 1/1024				
					0x9 1/512				
					0x8 1/256				
					0x7 1/128				
					0x6 1/64				
					0x5 1/32				
					0x4 1/16				
T16 Ch.3 Reload Data Register (T16_TR3)	0x4262 (16 bits)	D15-0	TR[15:0]	Reload data TR15 = MSB TR0 = LSB	0x0 to 0xffff	0x0	R/W		

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16 Ch.3 Counter Data Register (T16_TC3)	0x4264 (16 bits)	D15-0	TC[15:0]	Counter data TC15 = MSB TC0 = LSB	0x0 to 0xffff	0xffff	R	
T16 Ch.3 Control Register (T16_CTL3)	0x4266 (16 bits)	D15-5	–	reserved	–	–	–	Do not write 1.
		D4	TRMD	Count mode select	1 One shot 0 Repeat	0	R/W	
		D3-2	–	reserved	–	–	–	0 when being read.
		D1	PRESER	Timer reset	1 Reset 0 Ignored	0	W	
T16 Ch.3 Interrupt Control Register (T16_INT3)	0x4268 (16 bits)	D0	PRUN	Timer run/stop control	1 Run 0 Stop	0	R/W	
		D15-9	–	reserved	–	–	–	0 when being read.
		D8	T16IE	T16 interrupt enable	1 Enable 0 Disable	0	R/W	
		D7-1	–	reserved	–	–	–	0 when being read.
		D0	T16IF	T16 interrupt flag	1 Cause of interrupt occurred 0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.

0x4280–0x4288

16-bit Timer Ch.4

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16 Ch.4 Count Clock Select Register (T16_CLK4)	0x4280 (16 bits)	D15-4	–	reserved	–	–	–	0 when being read.	
		D3-0	DF[3:0]	Count clock division ratio select	DF[3:0] Division ratio	0x0	R/W	Source clock = PCLK	
						0xf reserved			
						0xe 1/16384			
						0xd 1/8192			
						0xc 1/4096			
						0xb 1/2048			
						0xa 1/1024			
						0x9 1/512			
						0x8 1/256			
						0x7 1/128			
						0x6 1/64			
						0x5 1/32			
				0x4 1/16					
				0x3 1/8					
				0x2 1/4					
				0x1 1/2					
				0x0 1/1					
T16 Ch.4 Reload Data Register (T16_TR4)	0x4282 (16 bits)	D15-0	TR[15:0]	Reload data TR15 = MSB TR0 = LSB	0x0 to 0xffff	0x0	R/W		
T16 Ch.4 Counter Data Register (T16_TC4)	0x4284 (16 bits)	D15-0	TC[15:0]	Counter data TC15 = MSB TC0 = LSB	0x0 to 0xffff	0xffff	R		
T16 Ch.4 Control Register (T16_CTL4)	0x4286 (16 bits)	D15-5	–	reserved	–	–	–	Do not write 1.	
		D4	TRMD	Count mode select	1 One shot 0 Repeat	0	R/W		
		D3-2	–	reserved	–	–	–	0 when being read.	
		D1	PRESER	Timer reset	1 Reset 0 Ignored	0	W		
T16 Ch.4 Interrupt Control Register (T16_INT4)	0x4288 (16 bits)	D0	PRUN	Timer run/stop control	1 Run 0 Stop	0	R/W		
		D15-9	–	reserved	–	–	–	0 when being read.	
		D8	T16IE	T16 interrupt enable	1 Enable 0 Disable	0	R/W		
		D7-1	–	reserved	–	–	–	0 when being read.	
		D0	T16IF	T16 interrupt flag	1 Cause of interrupt occurred 0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.	

0x4306–0x431c

Interrupt Controller

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 0 (ITC_LV0)	0x4306 (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV1[2:0]	P1 interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV0[2:0]	P0 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 1 (ITC_LV1)	0x4308 (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV3[2:0]	CT/RTC interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV2[2:0]	SWT interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 2 (ITC_LV2)	0x430a (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV5[2:0]	SVD interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV4[2:0]	T16A Ch.2 interrupt level	0 to 7	0x0	R/W	

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Interrupt Level Setup Register 3 (ITC_LV3)	0x430c (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV7[2:0]	T16A Ch.0 interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV6[2:0]	LCD/SPI Ch.2 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 4 (ITC_LV4)	0x430e (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV9[2:0]	T16 Ch.1 interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV8[2:0]	T16 Ch.0 & Ch.4 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 5 (ITC_LV5)	0x4310 (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV11[2:0]	T16 Ch.3/T16A Ch.3 interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV10[2:0]	T16 Ch.2 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 6 (ITC_LV6)	0x4312 (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV13[2:0]	UART Ch.1 interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV12[2:0]	UART Ch.0 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 7 (ITC_LV7)	0x4314 (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV15[2:0]	I2CM interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV14[2:0]	SPI Ch.0 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 8 (ITC_LV8)	0x4316 (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV17[2:0]	T16A Ch.1 interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV16[2:0]	REMC/SPI Ch.1 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 9 (ITC_LV9)	0x4318 (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV19[2:0]	RFC interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV18[2:0]	ADC10 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 10 (ITC_LV10)	0x431a (16 bits)	D15-11	–	reserved	–	–	–	0 when being read.
		D10-8	ILV21[2:0]	P3 interrupt level	0 to 7	0x0	R/W	
		D7-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV20[2:0]	P2 interrupt level	0 to 7	0x0	R/W	
Interrupt Level Setup Register 11 (ITC_LV11)	0x431c (16 bits)	D15-3	–	reserved	–	–	–	0 when being read.
		D2-0	ILV22[2:0]	I2CS interrupt level	0 to 7	0x0	R/W	

0x4320–0x4326

SPI Ch.0

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SPI Ch.0 Status Register (SPI_ST0)	0x4320 (16 bits)	D15-3	–	reserved	–	–	–	0 when being read.	
		D2	SPBSY	Transfer busy flag (master) ss signal low flag (slave)	1 Busy 0 Idle 1 ss = L 0 ss = H	0	R		
		D1	SPRBF	Receive data buffer full flag	1 Full 0 Not full	0	R		
		D0	SPTBE	Transmit data buffer empty flag	1 Empty 0 Not empty	1	R		
SPI Ch.0 Transmit Data Register (SPI_TXD0)	0x4322 (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.	
		D7-0	SPTDB[7:0]	SPI transmit data buffer SPTDB7 = MSB SPTDB0 = LSB	0x0 to 0xff	0x0	R/W		
SPI Ch.0 Receive Data Register (SPI_RXD0)	0x4324 (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.	
		D7-0	SPRDB[7:0]	SPI receive data buffer SPRDB7 = MSB SPRDB0 = LSB	0x0 to 0xff	0x0	R		
SPI Ch.0 Control Register (SPI_CTL0)	0x4326 (16 bits)	D15-10	–	reserved	–	–	–	0 when being read.	
		D9	MCLK	SPI clock source select	1 T16 Ch.2 0 PCLK/4	0	R/W		
		D8	M LSB	LSB/MSB first mode select	1 LSB 0 MSB	0	R/W		
		D7-6	–	reserved	–	–	–	–	0 when being read.
		D5	SPRIE	Receive data buffer full int. enable	1 Enable 0 Disable	0	R/W		
		D4	SPTIE	Transmit data buffer empty int. enable	1 Enable 0 Disable	0	R/W		
		D3	CPHA	Clock phase select	1 Data out 0 Data in	0	R/W		
		D2	CPOL	Clock polarity select	1 Active L 0 Active H	0	R/W		
		D1	MSSL	Master/slave mode select	1 Master 0 Slave	0	R/W		
		D0	SPEN	SPI enable	1 Enable 0 Disable	0	R/W	These bits must be set before setting SPEN to 1.	

0x4340–0x4346

I2C Master

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I2C Master Enable Register (I2CM_EN)	0x4340 (16 bits)	D15-1	–	reserved	–	–	–	0 when being read.
		D0	I2CMEN	I2C master enable	1 Enable 0 Disable	0	R/W	

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Master Control Register (I2CM_CTL)	0x4342 (16 bits)	D15-10	–	reserved	–	–	–	0 when being read.
		D9	RBUSY	Receive busy flag	1 Busy 0 Idle	0 R		
		D8	TBUSY	Transmit busy flag	1 Busy 0 Idle	0 R		
		D7-5	–	reserved	–	–	–	0 when being read.
		D4	NSERM	Noise remove on/off	1 On 0 Off	0 R/W		
		D3-2	–	reserved	–	–	–	0 when being read.
		D1	STP	Stop control	1 Stop 0 Ignored	0 R/W		
		D0	STRT	Start control	1 Start 0 Ignored	0 R/W		
I ² C Master Data Register (I2CM_DAT)	0x4344 (16 bits)	D15-12	–	reserved	–	–	–	0 when being read.
		D11	RBRDY	Receive buffer ready flag	1 Ready 0 Empty	0 R		
		D10	RXE	Receive execution	1 Receive 0 Ignored	0 R/W		
		D9	TXE	Transmit execution	1 Transmit 0 Ignored	0 R/W		
		D8	RTACK	Receive/transmit ACK	1 Error 0 ACK	0 R/W		
		D7-0	RTDT[7:0]	Receive/transmit data RTDT7 = MSB RTDT0 = LSB	0x0 to 0xff	0x0	R/W	
I ² C Master Interrupt Control Register (I2CM_ICTL)	0x4346 (16 bits)	D15-2	–	reserved	–	–	–	0 when being read.
		D1	RINTE	Receive interrupt enable	1 Enable 0 Disable	0 R/W		
		D0	TINTE	Transmit interrupt enable	1 Enable 0 Disable	0 R/W		

0x4360–0x436c

I²C Slave

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
I ² C Slave Transmit Data Register (I2CS_TRNS)	0x4360 (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.
		D7-0	SDATA[7:0]	I ² C slave transmit data	0-0xff	0x0	R/W	
I ² C Slave Receive Data Register (I2CS_RECV)	0x4362 (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.
		D7-0	RDATA[7:0]	I ² C slave receive data	0-0xff	0x0	R	
I ² C Slave Address Setup Register (I2CS_SADRS)	0x4364 (16 bits)	D15-7	–	reserved	–	–	–	0 when being read.
		D6-0	SADRS[6:0]	I ² C slave address	0-0x7f	0x0	R/W	
I ² C Slave Control Register (I2CS_CTL)	0x4366 (16 bits)	D15-9	–	reserved	–	–	–	0 when being read.
		D8	TBUF_CLR	I2CS_TRNS register clear	1 Clear state 0 Normal	0 R/W		
		D7	I2CSEN	I ² C slave enable	1 Enable 0 Disable	0 R/W		
		D6	SOFTRESET	Software reset	1 Reset 0 Cancel	0 R/W		
		D5	NAK_ANS	NAK answer	1 NAK 0 ACK	0 R/W		
		D4	BFREQ_EN	Bus free request enable	1 Enable 0 Disable	0 R/W		
		D3	CLKSTR_EN	Clock stretch On/Off	1 On 0 Off	0 R/W		
		D2	NF_EN	Noise filter On/Off	1 On 0 Off	0 R/W		
		D1	ASDET_EN	Async.address detection On/Off	1 On 0 Off	0 R/W		
		D0	COM_MODE	I ² C slave communication mode	1 Active 0 Standby	0 R/W		
I ² C Slave Status Register (I2CS_STAT)	0x4368 (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.
		D7	BSTAT	Bus status transition	1 Changed 0 Unchanged	0 R		
		D6	–	reserved	–	–	–	0 when being read.
		D5	TXUDF	Transmit data underflow	1 Occurred 0 Not occurred	0 R/W		
			RXOVF	Receive data overflow				Reset by writing 1.
		D4	BFREQ	Bus free request	1 Occurred 0 Not occurred	0 R/W		
		D3	DMS	Output data mismatch	1 Error 0 Normal	0 R/W		
		D2	ASDET	Async. address detection status	1 Detected 0 Not detected	0 R/W		
		D1	DA_NAK	NAK receive status	1 NAK 0 ACK	0 R/W		
D0	DA_STOP	STOP condition detect	1 Detected 0 Not detected	0 R/W				
I ² C Slave Access Status Register (I2CS_ASTAT)	0x436a (16 bits)	D15-5	–	reserved	–	–	–	0 when being read.
		D4	RXRDY	Receive data ready	1 Ready 0 Not ready	0 R		
		D3	TXEMP	Transmit data empty	1 Empty 0 Not empty	0 R		
		D2	BUSY	I ² C bus status	1 Busy 0 Free	0 R		
		D1	SELECTED	I ² C slave select status	1 Selected 0 Not selected	0 R		
		D0	R/W	Read/write direction	1 Output 0 Input	0 R		
I ² C Slave Interrupt Control Register (I2CS_ICTL)	0x436c (16 bits)	D15-3	–	reserved	–	–	–	0 when being read.
		D2	BSTAT_IEN	Bus status interrupt enable	1 Enable 0 Disable	0 R/W		
		D1	RXRDY_IEN	Receive interrupt enable	1 Enable 0 Disable	0 R/W		
		D0	TXEMP_IEN	Transmit interrupt enable	1 Enable 0 Disable	0 R/W		

0x4380–0x4386

SPI Ch.1

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SPI Ch.1 Status Register (SPI_ST1)	0x4380 (16 bits)	D15–3	–	reserved	–	–	–	0 when being read.	
		D2	SPBSY	Transfer busy flag (master) ss signal low flag (slave)	1 Busy 0 Idle 1 ss = L 0 ss = H	0	R		
		D1	SPRBF	Receive data buffer full flag	1 Full 0 Not full	0	R		
		D0	SPTBE	Transmit data buffer empty flag	1 Empty 0 Not empty	1	R		
		D7–0	–	reserved	–	–	–	–	0 when being read.
SPI Ch.1 Transmit Data Register (SPI_TXD1)	0x4382 (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.	
		D7–0	SPTDB[7:0]	SPI transmit data buffer SPTDB7 = MSB SPTDB0 = LSB	0x0 to 0xff	0x0	R/W		
SPI Ch.1 Receive Data Register (SPI_RXD1)	0x4384 (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.	
		D7–0	SPRDB[7:0]	SPI receive data buffer SPRDB7 = MSB SPRDB0 = LSB	0x0 to 0xff	0x0	R		
SPI Ch.1 Control Register (SPI_CTL1)	0x4386 (16 bits)	D15–10	–	reserved	–	–	–	0 when being read.	
		D9	MCLK	SPI clock source select	1 T16 Ch.2 0 PCLK/4	0	R/W		
		D8	MLSB	LSB/MSB first mode select	1 LSB 0 MSB	0	R/W		
		D7–6	–	reserved	–	–	–	–	0 when being read.
		D5	SPRIE	Receive data buffer full int. enable	1 Enable 0 Disable	0	R/W		
		D4	SPTIE	Transmit data buffer empty int. enable	1 Enable 0 Disable	0	R/W		
		D3	CPHA	Clock phase select	1 Data out 0 Data in	0	R/W	These bits must be set before setting SPEN to 1.	
		D2	CPOL	Clock polarity select	1 Active L 0 Active H	0	R/W		
		D1	MSSL	Master/slave mode select	1 Master 0 Slave	0	R/W		
		D0	SPEN	SPI enable	1 Enable 0 Disable	0	R/W		

0x43a0–0x43a6

SPI Ch.2

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SPI Ch.2 Status Register (SPI_ST2)	0x43a0 (16 bits)	D15–3	–	reserved	–	–	–	0 when being read.	
		D2	SPBSY	Transfer busy flag (master) ss signal low flag (slave)	1 Busy 0 Idle 1 ss = L 0 ss = H	0	R		
		D1	SPRBF	Receive data buffer full flag	1 Full 0 Not full	0	R		
		D0	SPTBE	Transmit data buffer empty flag	1 Empty 0 Not empty	1	R		
		D7–0	–	reserved	–	–	–	–	0 when being read.
SPI Ch.2 Transmit Data Register (SPI_TXD2)	0x43a2 (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.	
		D7–0	SPTDB[7:0]	SPI transmit data buffer SPTDB7 = MSB SPTDB0 = LSB	0x0 to 0xff	0x0	R/W		
SPI Ch.2 Receive Data Register (SPI_RXD2)	0x43a4 (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.	
		D7–0	SPRDB[7:0]	SPI receive data buffer SPRDB7 = MSB SPRDB0 = LSB	0x0 to 0xff	0x0	R		
SPI Ch.2 Control Register (SPI_CTL2)	0x43a6 (16 bits)	D15–10	–	reserved	–	–	–	0 when being read.	
		D9	MCLK	SPI clock source select	1 T16 Ch.2 0 PCLK/4	0	R/W		
		D8	MLSB	LSB/MSB first mode select	1 LSB 0 MSB	0	R/W		
		D7–6	–	reserved	–	–	–	–	0 when being read.
		D5	SPRIE	Receive data buffer full int. enable	1 Enable 0 Disable	0	R/W		
		D4	SPTIE	Transmit data buffer empty int. enable	1 Enable 0 Disable	0	R/W		
		D3	CPHA	Clock phase select	1 Data out 0 Data in	0	R/W	These bits must be set before setting SPEN to 1.	
		D2	CPOL	Clock polarity select	1 Active L 0 Active H	0	R/W		
		D1	MSSL	Master/slave mode select	1 Master 0 Slave	0	R/W		
		D0	SPEN	SPI enable	1 Enable 0 Disable	0	R/W		

0x5000–0x5003

Clock Timer

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Clock Timer Control Register (CT_CTL)	0x5000 (8 bits)	D7–5	–	reserved	–	–	–	0 when being read.	
		D4	CTRST	Clock timer reset	1 Reset	0 Ignored	0		W
		D3–1	–	reserved	–	–	–		–
		D0	CTRUN	Clock timer run/stop control	1 Run	0 Stop	0		R/W
Clock Timer Counter Register (CT_CNT)	0x5001 (8 bits)	D7–0	CTCNT[7:0]	Clock timer counter value	0x0 to 0xff	0	R		
Clock Timer Interrupt Mask Register (CT_IMSK)	0x5002 (8 bits)	D7–4	–	reserved	–	–	–	0 when being read.	
		D3	CTIE32	32 Hz interrupt enable	1 Enable	0 Disable	0		R/W
		D2	CTIE8	8 Hz interrupt enable	1 Enable	0 Disable	0		R/W
		D1	CTIE2	2 Hz interrupt enable	1 Enable	0 Disable	0		R/W
Clock Timer Interrupt Flag Register (CT_IFLG)	0x5003 (8 bits)	D7–4	–	reserved	–	–	–	0 when being read. Reset by writing 1.	
		D3	CTIF32	32 Hz interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0		R/W
		D2	CTIF8	8 Hz interrupt flag	–	–	0		R/W
		D1	CTIF2	2 Hz interrupt flag	–	–	0		R/W
		D0	CTIF1	1 Hz interrupt flag	–	–	0	R/W	

0x5020–0x5023

Stopwatch Timer

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Stopwatch Timer Control Register (SWT_CTL)	0x5020 (8 bits)	D7–5	–	reserved	–	–	–	0 when being read.	
		D4	SWTRST	Stopwatch timer reset	1 Reset	0 Ignored	0		W
		D3–1	–	reserved	–	–	–		–
		D0	SWTRUN	Stopwatch timer run/stop control	1 Run	0 Stop	0		R/W
Stopwatch Timer BCD Counter Register (SWT_BCNT)	0x5021 (8 bits)	D7–4	BCD10[3:0]	1/10 sec. BCD counter value	0 to 9	0	R		
		D3–0	BCD100[3:0]	1/100 sec. BCD counter value	0 to 9	0	R		
Stopwatch Timer Interrupt Mask Register (SWT_IMSK)	0x5022 (8 bits)	D7–3	–	reserved	–	–	–	0 when being read.	
		D2	SIE1	1 Hz interrupt enable	1 Enable	0 Disable	0		R/W
		D1	SIE10	10 Hz interrupt enable	1 Enable	0 Disable	0		R/W
		D0	SIE100	100 Hz interrupt enable	1 Enable	0 Disable	0		R/W
Stopwatch Timer Interrupt Flag Register (SWT_IFLG)	0x5023 (8 bits)	D7–3	–	reserved	–	–	–	0 when being read. Reset by writing 1.	
		D2	SIF1	1 Hz interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0		R/W
		D1	SIF10	10 Hz interrupt flag	–	–	0		R/W
		D0	SIF100	100 Hz interrupt flag	–	–	0		R/W

0x5040–0x5041

Watchdog Timer

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Watchdog Timer Control Register (WDT_CTL)	0x5040 (8 bits)	D7–5	–	reserved	–	–	–	0 when being read.	
		D4	WDTRST	Watchdog timer reset	1 Reset	0 Ignored	0		W
		D3–0	WDTRUN[3:0]	Watchdog timer run/stop control	Other than 1010 Run	1010 Stop	1010		R/W
Watchdog Timer Status Register (WDT_ST)	0x5041 (8 bits)	D7–2	–	reserved	–	–	–	0 when being read.	
		D1	WDTMD	NMI/Reset mode select	1 Reset	0 NMI	0		R/W
		D0	WDTST	NMI status	1 NMI occurred	0 Not occurred	0		R
WDT Clock Select Register (WDT_CLK)	0x5070 (8 bits)	D7–6	WDCKDV [1:0]	WDT clock division ratio select	WDCKDV[1:0] Division ratio	0x0	R/W	When the clock source is IOSC or OSC3	
					0x3				1/32768
					0x2				1/16384
					0x1				1/8192
					0x0				1/4096
		D5–4	WDCKSRC [1:0]	WDT clock source select	WDCKSRC[1:0] Clock source	0x1	R/W		
					0x3				reserved
					0x2				OSC3
					0x1				OSC1
		D3–0	WDCKEN [3:0]	WDT clock enable	other Enable	0b1010 Disable	0b1010		R/W

0x5060–0x5081

Clock Generator

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks			
Clock Source Select Register (CLG_SRC)	0x5060 (8 bits)	D7–5	–	reserved	–	–	–	0 when being read.			
		D4	EXOSC3SEL	External OSC3 clock select	1 External 0 Internal	0	R/W				
		D3–2	–	reserved	–	–	–	0 when being read.			
		D1–0	CLKSRC[1:0]	System clock source select	CLKSRC[1:0] Clock source	0x0	R/W				
					0x3 reserved 0x2 OSC3 0x1 OSC1 0x0 IOSC						
Oscillation Control Register (CLG_CTL)	0x5061 (8 bits)	D7–6	IOSCWT[1:0]	IOSC wait cycle select	IOSCWT[1:0] Wait cycle	0x0	R/W				
					0x3 8 cycles 0x2 16 cycles 0x1 32 cycles 0x0 64 cycles						
					D5–4	OSC3WT[1:0]	OSC3 wait cycle select	OSC3WT[1:0] Wait cycle	0x0	R/W	
								0x3 128 cycles 0x2 256 cycles 0x1 512 cycles 0x0 1024 cycles			
		D3	EXOSC3EN	External OSC3 enable	1 Enable 0 Disable	0	R/W				
		D2	IOSCEN	IOSC enable	1 Enable 0 Disable	1	R/W				
		D1	OSC1EN	OSC1 enable	1 Enable 0 Disable	0	R/W				
		D0	OSC3EN	OSC3 enable	1 Enable 0 Disable	0	R/W				
Sleep Control Register (CLG_SLPCTL)	0x5062 (8 bits)	D7	–	reserved	–	0	R	0 when being read.			
		D6	IOSCSLPEN	IOSC clock sleep control	1 Enable(Sleep) 0 Disable(Sleep)	1	R/W				
		D5	OSC1SLPEN	OSC1 clock sleep control	1 Enable(Sleep) 0 Disable(Sleep)	1					
		D4	OSC3SLPEN	OSC3 clock sleep control	1 Enable(Sleep) 0 Disable(Sleep)	1					
		D3–2	–	reserved	–	0	R	0 when being read.			
		D1	–	reserved	–	1	R	1 when being read.			
		D0	–	reserved	–	0	R	0 when being read.			
FOUTA Control Register (CLG_FOUTA)	0x5064 (8 bits)	D7–6	–	reserved	–	–	–	0 when being read.			
		D5–4	FOUTAD [1:0]	FOUTA clock division ratio select	FOUTAD[1:0] Division ratio	0x0	R/W	When the clock source is IOSC or OSC3			
					0x3 reserved 0x2 1/4 0x1 1/2 0x0 1/1						
					D3–2	FOUTASRC [1:0]	FOUTA clock source select	FOUTASRC[1:0] Clock source	0x0	R/W	
								0x3 reserved 0x2 OSC3 0x1 OSC1 0x0 IOSC			
		D1	–	reserved	–	–	–	0 when being read.			
D0	FOUTAE	FOUTA output enable	1 Enable 0 Disable	0	R/W						
FOUTB Control Register (CLG_FOUTB)	0x5065 (8 bits)	D7–6	–	reserved	–	–	–	0 when being read.			
		D5–4	FOUTBD [1:0]	FOUTB clock division ratio select	FOUTBD[1:0] Division ratio	0x0	R/W	When the clock source is IOSC or OSC3			
					0x3 reserved 0x2 1/4 0x1 1/2 0x0 1/1						
					D3–2	FOUTBSRC [1:0]	FOUTB clock source select	FOUTBSRC[1:0] Clock source	0x0	R/W	
								0x3 reserved 0x2 OSC3 0x1 OSC1 0x0 IOSC			
		D1	–	reserved	–	–	–	0 when being read.			
D0	FOUTBE	FOUTB output enable	1 Enable 0 Disable	0	R/W						
PCLK Control Register (CLG_PCLK)	0x5080 (8 bits)	D7–2	–	reserved	–	–	–	0 when being read.			
		D1–0	PCKEN[1:0]	PCLK enable	PCKEN[1:0] PCLK supply	0x3	R/W				
					0x3 Enable 0x2 Not allowed 0x1 Not allowed 0x0 Disable						
CCLK Control Register (CLG_CCLK)	0x5081 (8 bits)	D7–2	–	reserved	–	–	–	0 when being read.			
		D1–0	CCLKGR[1:0]	CCLK clock gear ratio select	CCLKGR[1:0] Gear ratio	0x0	R/W				
					0x3 1/8 0x2 1/4 0x1 1/2 0x0 1/1						

0x5063, 0x50a0–0x50a6

LCD Driver

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
LCD Clock Select Register (LCD_CLK)	0x5063 (8 bits)	D7	–	reserved	–	–	–	0 when being read.	
		D6–4	LCKDV[2:0]	LCD clock division ratio select	LCKDV[2:0]	Division ratio	0x0	R/W	When the clock source is IOSC or OSC3
					0x7–0x5	reserved			
					0x4	1/512			
					0x3	1/256			
					0x2	1/128			
D3:2	LCKSRC[1:0]	LCD clock source select	LCKSRC[1:0]	Clock source	0x1	R/W			
		D1	–	reserved	–	–	–	0 when being read.	
		D0	LCKEN	LCD clock enable	1 Enable 0 Disable	0	R/W		
LCD Display Control Register (LCD_DCTL)	0x50a0 (8 bits)	D7	SEGREV	Segment output assignment control	1 Normal 0 Reverse	1	R/W		
		D6	COMREV	Common output assignment control	1 Normal 0 Reverse	1	R/W		
		D5	DSPAR	Display memory area control	1 Area 1 0 Area 0	0	R/W		
		D4	DSPREV	Reverse display control	1 Normal 0 Reverse	1	R/W		
		D3	–	reserved	–	0	R	0 when being read.	
		D2	COMPOS	Common pin assignment control	1 Center 0 End	0	R/W		
		D1–0	DSPC[1:0]	LCD display control	DSPC[1:0]	Display	0	R/W	
					0x3	All off			
		0x2	All on						
		0x1	Normal display						
		0x0	Display off						
LCD Contrast Adjustment Register (LCD_CADJ)	0x50a1 (8 bits)	D7–5	FRMCYC[2:0]	1 cycle Frame numbers selection control	LC[3:0]	Display	0	R/W	
					0x7	Pattern 8			
					0x6	Pattern 7			
					0x5	Pattern 6			
					0x4	Pattern 5			
		0x3	Pattern 4						
		0x2	Pattern 3						
		0x1	Pattern 2						
		0x0	Pattern 1						
		D4	GSEN	Gray-scale display enable	1 G/S Display Mode 0 Normal Display Mode	0	R/W		
		D3–0	LC[3:0]	LCD contrast adjust	LC[3:0]	Display	0x7	R/W	
					0xf	Dark			
LCD Clock Control Register (LCD_CCTL)	0x50a2 (8 bits)	D7–4	FRMCNT[3:0]	Frame frequency control	FRMCNT[3:0] = $\frac{\text{FRMDIV} \times \text{f}_{\text{CLK}} \times \text{duty}}{\text{f}_{\text{LFR}}} - 1$	0x3	R/W		
					D3	FRMDIV	Frame division rate select bits	1 1/1 0 1/4	0
		D2–0	LDUTY[2:0]	Duty selection control	LDUTY[2:0]	Duty	0x2	R/W	
					0x7–0x6	reserved			
		0x5	1/32 (Type B)						
		0x4	1/32 (Type A)						
		0x3	1/24						
		0x2	1/32 (Normal)						
		0x1	1/16						
		0x0	reserved (1/8 Duty)						
LCD Voltage Regulator Control Register (LCD_VREG)	0x50a3 (8 bits)	D7–5	–	reserved	–	0	R	0 when being read.	
		D4	LHVLD	LCD heavy load protection mode	1 On 0 Off	0	R/W		
		D3–0	–	reserved	–	0	R	0 when being read.	
LCD Power Voltage Booster Control Register (LCD_PWR)	0x50a4 (8 bits)	D7–2	–	reserved	–	0	R	0 when being read.	
		D1	VDSEL	Regulator power source select	1 Vb2 0 VDD	0	R/W		
		D0	PBON	Power voltage booster control	1 On 0 Off	0	R/W		
LCD Interrupt Mask Register (LCD_IMASK)	0x50a5 (8 bits)	D7–1	–	reserved	–	0	R	0 when being read.	
		D0	IFRMEN	Frame signal interrupt enable	–	0	R/W		
LCD Interrupt Flag Register (LCD_IFLG)	0x50a6 (8 bits)	D7–1	–	reserved	–	0	R	0 when being read.	
		D0	IFRMFLG	Frame signal interrupt flag	–	0	R/W	Cleared by writing 1.	

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
COM Terminal Control Register (LCD_COMCx)	0x50a7 0x50a8 0x50a9 0x50aa	D7-0	COMx DEN	COMx drive enable	1 Enable	0 Disable	1	R/W	
		D7-5	–	reserved	–		0	R	0 when being read.
		D4-0	NLINE[4:0]	SEG n line reverse drive selection	NLINE[4:0]	Reverse line	0	R/W	
			0xf	31 lines	:	:			
0x1	1 line	0x0	Normal						

0x5066, 0x5100–0x5104

SVD Circuit

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
SVD Clock Control Register (SVD_CLK)	0x5066 (8 bits)	D7-4	–	reserved	–		–	–	0 when being read.	
		D3-2	CLKSRC [1:0]	SVD clock source select	CLKSRC[1:0]	Clock source	0x1	R/W		
			0x3	reserved	0x2	OSC3/512				
			0x1	OSC1	0x0	IOSC/128				
D1	–	reserved	–		–	–	0 when being read.			
D0	CLKEN	SVD clock enable	1	Enable	0	Disable	0	R/W		
SVD Enable Register (SVD_EN)	0x5100 (8 bits)	D7-4	SVDPRE[3:0]	SVD reset enable	1010	Enable	Others	Disable	0	R/W
		D3	–	reserved	–		0	R	0 when being read.	
		D2-1	SVDMMD[1:0]	SVD intermittent mode	SVDC[3:0]	Time	0	R/W		
			0x3	SVDCLK/512 (about 16msec)	0x2	SVDCLK/256 (about 8msec)				
			0x1	SVDCLK/128 (about 4msec)	0x0	continuous				
D0	SVDEN	SVD enable	1	Enable	0	Disable	0	R/W		
SVD Comparison Voltage Register (SVD_CMP)	0x5101 (8 bits)	D7-6	–	reserved	–		0	R	0 when being read.	
		D5-4	SVDSRC[1:0]	SVD sampling results count	SVDC[1:0]	Times	0	R/W	When SVDMMD = 0, settings are invalid.	
			0x3	8 times in a row	0x2	4 times in a row				
			0x1	2 times in a row	0x0	1 time				
		D3-0	SVDC[3:0]	SVD compare voltage	SVDC[3:0]	Voltage	0	R/W		
0xf	High voltage		:	:						
0x0	Low voltage									
SVD Detection Result Register (SVD_RSLT)	0x5102 (8 bits)	D7-1	–	reserved	–		0	R	0 when being read.	
		D0	SVDDT	SVD detection	–		×	R		
SVD Interrupt Mask Register (SVD_IMSK)	0x5103 (8 bits)	D7-1	–	reserved	–		0	R	0 when being read.	
		D0	SVDDIE	SVD interrupt mask	–		0	R/W		
SVD Interrupt Flag Factor Register (SVD_IFLG)	0x5104 (8 bits)	D7-1	–	reserved	–		0	R	0 when being read.	
		D0	SVDDIF	SVD interrupt factor flag	–		0	R/W	Reset by writing 1.	

0x5120–0x5122

Power Generator

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
Vd1 Control Register (VD1_CTL)	0x5120 (8 bits)	D7-6	–	reserved	–		–	–	0 when being read.	
		D5	HVLD	Vd1 heavy load protection mode	1	On	0	Off	0	R/W
		D4-1	–	reserved	–		–	–	–	0 when being read.
		D0	VD1MD	Flash erase/programming mode	1	Flash (2.5 V)	0	Norm.(1.8 V)	0	R/W
Vd1 Select Register (VD1_SEL)	0x5122 (8 bits)	D7-1	–	reserved	–		–	–	0 when being read.	
		D0	VD1SEL	Vd1 regulator output level select	1	Vdd level	0	Normal level	0	R/W

0x5140–0x514b

Real-time Clock

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
RTC Interrupt Flag Register (RTC_IFLG)	0x5140 (8 bits)	D7	–	reserved	–	0	R	0 when being read.	
		D6	IF1DAY	1 day INT flag	1 Occurred 0 Not occurred	0	R/W	Reset by writing 1.	
		D5	IF1HUR	1 hour INT flag					
		D4	IF1MIN	1 minute INT flag					
		D3	IF1SEC	1 second INT flag					
		D2	IF2HZ	1/2 second INT flag					
		D1	IF8HZ	1/8 second INT flag					
		D0	IF32HZ	1/32 second INT flag					
RTC Interrupt Mask Register (RTC_IMSK)	0x5141 (8 bits)	D7	–	reserved	–	0	R	0 when being read.	
		D6	IE1DAY	1 day interrupt enable	1 Enable 0 Disable	0	R/W	Reset by writing 1.	
		D5	IE1HUR	1 hour interrupt enable					
		D4	IE1MIN	1 minute interrupt enable					
		D3	IE1SEC	1 second interrupt enable					
		D2	IE2HZ	1/2 second interrupt enable					
		D1	IE8HZ	1/8 second interrupt enable					
		D0	IE32HZ	1/32 second interrupt enable					
RTC Control 0 Register (RTC_CNTL0)	0x5142 (8 bits)	D7–5	–	reserved	–	0	R	0 when being read.	
		D4	RTC24H	24H/12H mode select	1 24H 0 12H	0	R/W		
		D3	–	reserved	–	0	R	0 when being read.	
		D2	RTCADJ	30-second adjustment	1 Adjust (auto clear) 0 Ignore	0	R/W		
		D1	RTCSTP	Counter run/stop control	1 Stop 0 Run	1	R/W		
		D0	RTCST	Software reset	1 Reset (auto clear) 0 Ignore	0	R/W		
RTC Control 1 Register (RTC_CNTL1)	0x5143 (8 bits)	D7–2	–	reserved	–	0	R	0 when being read.	
		D1	RTCBSY	Counter busy flag	1 Busy 0 Write enable	0	R		
		D0	RTCCHLD	Counter hold control	1 Counter hold 0 Running	0	R/W		
RTC Second Register (RTC_SEC)	0x5144 (8 bits)	D7	–	reserved	–	0	R	0 when being read.	
		D6–4	RTCESH	10 second counter	0 to 5	0	R/W		
		D3–0	RTCESL	1 second counter	0 to 9	0	R/W		
RTC Minute Register (RTC_MIN)	0x5145 (8 bits)	D7	–	reserved	–	–	–	0 when being read.	
		D6–4	RTCMIH	10 minute counter	0 to 5	0	R/W		
		D3–0	RTCMIL	1 minute counter	0 to 9	0	R/W		
RTC Hour Register (RTC_HOUR)	0x5146 (8 bits)	D7	–	reserved	–	0	R	0 when being read.	
		D6	RTCAP	AM/PM indicator	1 PM 0 AM	0	R/W		
		D5–4	RTCCH	10 hour counter	0 to 2	1	R/W		
		D3–0	RTCCHL	1 hour counter	0 to 9	2	R/W		
RTC Day Register (RTC_DAY)	0x5147 (8 bits)	D7–6	–	reserved	–	0	R	0 when being read.	
		D5–4	RTCDH	10 day counter	0 to 3	0	R/W		
		D3–0	RTCDL	1 day counter	0 to 9	1	R/W		
RTC Month Register (RTC_MONTH)	0x5148 (8 bits)	D7–5	–	reserved	–	0	R	0 when being read.	
		D4	RTCMOH	10 month counter	0 to 1	0	R/W		
		D3–0	RTCMOL	1 month counter	0 to 9	1	R/W		
RTC Year Register (RTC_YEAR)	0x5149 (8 bits)	D7–4	RTCYH	10 year counter	0 to 9	0	R/W		
		D3–0	RTCYL	1 year counter	0 to 9	0	R/W		
RTC Week Register (RTC_WEEK)	0x514a (8 bits)	D7–3	–	reserved	–	0	R	0 when being read.	
		D2–0	RTCWK	day of week counter	RTCWK Day of week	000	R/W		
					111 N/A				
					110 Saturday				
					101 Friday				
					100 Thursday				
					011 Wednesday				
					010 Tuesday				
RTC 1Hz Register (RTC_1HZ)	0x514b (8 bits)	D7	RTC1HZ	1/sec counter	0x00 to 0xff	0	R		
		D6	RTC2HZ						
		D5	RTC4HZ						
		D4	RTC8HZ						
		D3	RTC16HZ						
		D2	RTC32HZ						
		D1	RTC64HZ						
D0	RTC128HZ								

0x506f, 0x5180–0x5182

Sound Generator

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
SND Clock Control Register (SND_CLK)	0x506f (8 bits)	D7-6	–	reserved	–	–	–	0 when being read.	
		D5-4	SNDCLKDV [1:0]	SND clock division ratio select	SNDCLKDV[1:0]	Division Ratio	0x0	R/W	When the clock source is IOSC or OSC3.
					0x3	1/256			
					0x2	1/128			
					0x1	1/64			
D3-2	SNDCLK-SRC [1:0]	SND clock source select	SNDCLKSRC [1:0]	Clock source	0x1	R/W			
0x3			reserved						
0x2			OSC3						
0x1			OSC1						
D1	–	reserved	–	–	–	–	0 when being read.		
D0	SNDCLKEN	SND clock enable	1 Enable	0 Disable	0x0	R/W			
SND Control Register (SND_CTL)	0x5180 (8 bits)	D7-6	–	reserved	–	–	–	0 when being read.	
		D5-4	BZTM[1:0]	Buzzer envelope time/one-shot output time select	BZTM[1:0]	Time	0x0	R/W	
					0x3	125 ms			
					0x2	62.5 ms			
					0x1	31.25 ms			
D3-2	BZMD[1:0]	Buzzer mode select	BZMD[1:0]	Mode	0x0	R/W			
0x3			reserved						
0x2			Envelope						
0x1			One-shot						
D1	–	reserved	–	–	–	–	0 when being read.		
D0	BZEN	Buzzer output control	1 On/Trigger	0 Off	0	R/W			
Buzzer Frequency Control Register (SND_BZFQ)	0x5181 (8 bits)	D7-3	–	reserved	–	–	–	0 when being read.	
		D2-0	BZFQ[2:0]	Buzzer frequency select	BZFQ[2:0]	Frequency	0x0	R/W	
					0x7	1170.3 Hz			
					0x6	1365.3 Hz			
					0x5	1638.4 Hz			
0x4	2048.0 Hz								
0x3	2340.6 Hz								
0x2	2730.7 Hz								
0x1	3276.8 Hz								
0x0	4096.0 Hz								
Buzzer Duty Ratio Control Register (SND_BZDT)	0x5182 (8 bits)	D7-3	–	reserved	–	–	–	0 when being read.	
		D2-0	BZDT[2:0]	Buzzer duty ratio select	BZDT[2:0]	Duty (volume)	0x0	R/W	
					0x7	Level 8 (Min.)			
0x0	Level 1 (Max.)								

0x5200–0x52a8

P Port & Port MUX

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
P0 Port Input Data Register (P0_IN)	0x5200 (8 bits)	D7-0	P0IN[7:0]	P0[7:0] port input data	1 1 (H) 0 0 (L)	×	R	
P0 Port Output Data Register (P0_OUT)	0x5201 (8 bits)	D7-0	P0OUT[7:0]	P0[7:0] port output data	1 1 (H) 0 0 (L)	0	R/W	
P0 Port Output Enable Register (P0_OEN)	0x5202 (8 bits)	D7-0	P0OEN[7:0]	P0[7:0] port output enable	1 Enable 0 Disable	0	R/W	
P0 Port Pull-up Control Register (P0_PU)	0x5203 (8 bits)	D7-0	P0PU[7:0]	P0[7:0] port pull-up enable	1 Enable 0 Disable	0	R/W	
P0 Port Schmitt Trigger Control Register (P0_SM)	0x5204 (8 bits)	D7-0	P0SM[7:0]	P0[7:0] port Schmitt trigger input enable	1 Enable (Schmitt) 0 Disable (CMOS)	1 (0xff)	R/W	
P0 Port Interrupt Mask Register (P0_IMSK)	0x5205 (8 bits)	D7-0	P0IE[7:0]	P0[7:0] port interrupt enable	1 Enable 0 Disable	0	R/W	

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks		
P0 Port Interrupt Edge Select Register (P0_EDGE)	0x5206 (8 bits)	D7-0	P0EDGE[7:0]	P0[7:0] port interrupt edge select	1	Falling edge	0	Rising edge	0	R/W	
P0 Port Interrupt Flag Register (P0_IFLG)	0x5207 (8 bits)	D7-0	P0IF[7:0]	P0[7:0] port interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	Reset by writing 1.
P0 Port Chattering Filter Control Register (P0_CHAT)	0x5208 (8 bits)	D7	–	reserved	–		–	–	–	–	0 when being read.
		D6-4	P0CF2[2:0]	P0[7:4] chattering filter time	P0CF2[2:0]	Filter time	0	R/W			
					0x7	16384/fPCLK	0x0	R/W			
					0x6	8192/fPCLK					
0x5	4096/fPCLK										
0x4	2048/fPCLK										
0x3	1024/fPCLK										
0x2	512/fPCLK										
0x1	256/fPCLK										
0x0	None										
D3	–	reserved	–		–	–	–	–	–	0 when being read.	
D2-0	P0CF1[2:0]	P0[3:0] chattering filter time	P0CF1[2:0]	Filter time	0x0	R/W					
0x7	16384/fPCLK										
0x6	8192/fPCLK										
0x5	4096/fPCLK										
0x4	2048/fPCLK										
0x3	1024/fPCLK										
0x2	512/fPCLK										
0x1	256/fPCLK										
0x0	None										
P0 Port Key-Entry Reset Configuration Register (P0_KRST)	0x5209 (8 bits)	D7-2	–	reserved	–		–	–	–	–	0 when being read.
		D1-0	P0KRST[1:0]	P0 port key-entry reset configuration	P0KRST[1:0]	Configuration	0x0	R/W			
0x3	P0[3:0] = 0										
0x2	P0[2:0] = 0										
0x1	P0[1:0] = 0										
0x0	Disable										
P0 Port Input Enable Register (P0_IEN)	0x520a (8 bits)	D7-0	P0IEN[7:0]	P0[7:0] port input enable	1	Enable	0	Disable	0x0	R/W	
P1 Port Input Data Register (P1_IN)	0x5210 (8 bits)	D7-0	P1IN[7:0]	P1[7:0] port input data	1	1 (H)	0	0 (L)	×	R	
P1 Port Output Data Register (P1_OUT)	0x5211 (8 bits)	D7-0	P1OUT[7:0]	P1[7:0] port output data	1	1 (H)	0	0 (L)	0	R/W	
P1 Port Output Enable Register (P1_OEN)	0x5212 (8 bits)	D7-0	P1OEN[7:0]	P1[7:0] port output enable	1	Enable	0	Disable	0	R/W	
P1 Port Pull-up Control Register (P1_PU)	0x5213 (8 bits)	D7-0	P1PU[7:0]	P1[7:0] port pull-up enable	1	Enable	0	Disable	1 (0xff)	R/W	
P1 Port Schmitt Trigger Control Register (P1_SM)	0x5214 (8 bits)	D7-0	P1SM[7:0]	P1[7:0] port Schmitt trigger input enable	1	Enable (Schmitt)	0	Disable (CMOS)	1 (0xff)	R/W	
P1 Port Interrupt Mask Register (P1_IMSK)	0x5215 (8 bits)	D7-0	P1IE[7:0]	P1[7:0] port interrupt enable	1	Enable	0	Disable	0	R/W	
P1 Port Interrupt Edge Select Register (P1_EDGE)	0x5216 (8 bits)	D7-0	P1EDGE[7:0]	P1[7:0] port interrupt edge select	1	Falling edge	0	Rising edge	0	R/W	
P1 Port Interrupt Flag Register (P1_IFLG)	0x5217 (8 bits)	D7-0	P1IF[7:0]	P1[7:0] port interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	Reset by writing 1.

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting		Init.	R/W	Remarks
P1 Port Chattering Filter Control Register (P1_CHAT)	0x5218 (8 bits)	D7	–	reserved	–		–	–	0 when being read.
		D6–4	P1CF2[2:0]	P1[7:4] chattering filter time	P1CF2[2:0]	Filter time	0	R/W	
					0x7	16384/fPCLK	0x0	R/W	
					0x6	8192/fPCLK			
					0x5	4096/fPCLK			
					0x4	2048/fPCLK			
					0x3	1024/fPCLK			
					0x2	512/fPCLK			
					0x1	256/fPCLK			
		0x0	None						
D3	–	reserved	–		–	–	0 when being read.		
D2–0	P1CF1[2:0]	P1[3:0] chattering filter time	P1CF1[2:0]	Filter time	0x0	R/W			
			0x7	16384/fPCLK					
			0x6	8192/fPCLK					
			0x5	4096/fPCLK					
			0x4	2048/fPCLK					
			0x3	1024/fPCLK					
			0x2	512/fPCLK					
			0x1	256/fPCLK					
0x0	None								
P1 Port Input Enable Register (P1_IEN)	0x521a (8 bits)	D7–0	P1IEN[7:0]	P1[7:0] port input enable	1 Enable	0 Disable	0xff	R/W	
P2 Port Input Data Register (P2_IN)	0x5220 (8 bits)	D7–0	P2IN[7:0]	P2[7:0] port input data	1 1 (H)	0 0 (L)	×	R	
P2 Port Output Data Register (P2_OUT)	0x5221 (8 bits)	D7–0	P2OUT[7:0]	P2[7:0] port output data	1 1 (H)	0 0 (L)	0	R/W	
P2 Port Output Enable Register (P2_OEN)	0x5222 (8 bits)	D7–0	P2OEN[7:0]	P2[7:0] port output enable	1 Enable	0 Disable	0	R/W	
P2 Port Pull-up Control Register (P2_PU)	0x5223 (8 bits)	D7–0	P2PU[7:0]	P2[7:0] port pull-up enable	1 Enable	0 Disable	0	R/W	
P2 Port Schmitt Trigger Control Register (P2_SM)	0x5224 (8 bits)	D7–0	P2SM[7:0]	P2[7:0] port Schmitt trigger input enable	1 Enable (Schmitt)	0 Disable (CMOS)	1 (0xff)	R/W	P26 and P27 ports are always schmitt on.
P2 Port Interrupt Mask Register (P2_IMSK)	0x5225 (8 bits)	D7–0	P2IE[7:0]	P2[7:0] port interrupt enable	1 Enable	0 Disable	0	R/W	
P2 Port Interrupt Edge Select Register (P2_EDGE)	0x5226 (8 bits)	D7–0	P2EDGE[7:0]	P2[7:0] port interrupt edge select	1 Falling edge	0 Rising edge	0	R/W	
P2 Port Interrupt Flag Register (P2_IFLG)	0x5227 (8 bits)	D7–0	P2IF[7:0]	P2[7:0] port interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
P2 Port Chattering Filter Control Register (P2_CHAT)	0x5228 (8 bits)	D7	–	reserved	–		–	–	0 when being read.
		D6–4	P2CF2[2:0]	P2[7:4] chattering filter time	P2CF2[2:0]	Filter time	0	R/W	
					0x7	16384/fPCLK	0x0	R/W	
					0x6	8192/fPCLK			
					0x5	4096/fPCLK			
					0x4	2048/fPCLK			
					0x3	1024/fPCLK			
					0x2	512/fPCLK			
					0x1	256/fPCLK			
		0x0	None						
D3	–	reserved	–		–	–	0 when being read.		
D2–0	P2CF1[2:0]	P2[3:0] chattering filter time	P2CF1[2:0]	Filter time	0x0	R/W			
			0x7	16384/fPCLK					
			0x6	8192/fPCLK					
			0x5	4096/fPCLK					
			0x4	2048/fPCLK					
			0x3	1024/fPCLK					
			0x2	512/fPCLK					
			0x1	256/fPCLK					
0x0	None								
P2 Port Input Enable Register (P2_IEN)	0x522a (8 bits)	D7–0	P2IEN[7:0]	P2[7:0] port input enable	1 Enable	0 Disable	0	R/W	

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting			Init.	R/W	Remarks
P3 Port Input Data Register (P3_IN)	0x5230 (8 bits)	D7-0	P3IN[7:0]	P3[7:0] port input data	1	1 (H)	0 0 (L)	×	R	
P3 Port Output Data Register (P3_OUT)	0x5231 (8 bits)	D7-0	P3OUT[7:0]	P3[7:0] port output data	1	1 (H)	0 0 (L)	0	R/W	
P3 Port Output Enable Register (P3_OEN)	0x5232 (8 bits)	D7-0	P3OEN[7:0]	P3[7:0] port output enable	1	Enable	0 Disable	0	R/W	
P3 Port Pull-up Control Register (P3_PU)	0x5233 (8 bits)	D7-0	P3PU[7:0]	P3[7:0] port pull-up enable	1	Enable	0 Disable	0	R/W	
P3 Port Schmitt Trigger Control Register (P3_SM)	0x5234 (8 bits)	D7-0	P3SM[7:0]	P3[7:0] port Schmitt trigger input enable	1	Enable (Schmitt)	0 Disable (CMOS)	1 (0xf)	R/W	
P3 Port Interrupt Mask Register (P3_IMSK)	0x5235 (8 bits)	D7-0	P3IE[7:0]	P3[7:0] port interrupt enable	1	Enable	0 Disable	0	R/W	
P3 Port Interrupt Edge Select Register (P3_EDGE)	0x5236 (8 bits)	D7-0	P3EDGE[7:0]	P3[7:0] port interrupt edge select	1	Falling edge	0 Rising edge	0	R/W	
P3 Port Interrupt Flag Register (P3_IFLG)	0x5237 (8 bits)	D7-0	P3IF[7:0]	P3[7:0] port interrupt flag	1	Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
P3 Port Chattering Filter Control Register (P3_CHAT)	0x5238 (8 bits)	D7	–	reserved	–			–	–	0 when being read.
		D6-4	P3CF2[2:0]	P3[7:4] chattering filter time	P3CF2[2:0]	Filter time	0	R/W		
					0x7	16384/fPCLK	0x0	R/W		
					0x6	8192/fPCLK				
				0x5	4096/fPCLK					
				0x4	2048/fPCLK					
				0x3	1024/fPCLK					
				0x2	512/fPCLK					
				0x1	256/fPCLK					
				0x0	None					
		D3	–	reserved	–			–	–	0 when being read.
		D2-0	P3CF1[2:0]	P3[3:0] chattering filter time	P3CF1[2:0]	Filter time	0x0	R/W		
					0x7	16384/fPCLK				
					0x6	8192/fPCLK				
					0x5	4096/fPCLK				
					0x4	2048/fPCLK				
					0x3	1024/fPCLK				
					0x2	512/fPCLK				
					0x1	256/fPCLK				
					0x0	None				
P3 Port Input Enable Register (P3_IEN)	0x523a (8 bits)	D7-0	P3IEN[7:0]	P3[7:0] port input enable	1	Enable	0 Disable	0	R/W	
P4 Port Input Data Register (P4_IN)	0x5240 (8 bits)	D7-2	–	reserved	–			–	–	0 when being read.
		D1-0	P4IN[2:0]	P4[2:0] port input data	1	1 (H)	0 0 (L)	×	R	
P4 Port Output Data Register (P4_OUT)	0x5241 (8 bits)	D7-3	–	reserved	–			–	–	0 when being read.
		D2-0	P4OUT[2:0]	P4[2:0] port output data	1	1 (H)	0 0 (L)	0	R/W	
P4 Port Output Enable Register (P4_OEN)	0x5242 (8 bits)	D7-3	–	reserved	–			–	–	0 when being read.
		D2-0	P4OEN[2:0]	P4[2:0] port output enable	1	Enable	0 Disable	0	R/W	
P4 Port Pull-up Control Register (P4_PU)	0x5243 (8 bits)	D7-2	–	reserved	–			–	–	0 when being read.
		D1-0	P4PU[2:0]	P4[1:0] port pull-up enable	1	Enable	0 Disable	1 (0x3)	R/W	
P4 Port Schmitt Trigger Control Register (P4_SM)	0x5244 (8 bits)	D7-2	–	reserved	–			–	–	0 when being read.
		D1-0	P4SM[2:0]	P4[1:0] port Schmitt trigger input enable	1	Enable (Schmitt)	0 Disable (CMOS)	1 (0x3)	R/W	
P4 Port Input Enable Register (P4_IEN)	0x524a (8 bits)	D7-2	–	reserved	–			–	–	0 when being read.
		D1-0	P4IEN[2:0]	P4[1:0] port input enable	1	Enable	0 Disable	0x3	R/W	

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P0[3:0] Port Function Select Register (P00_03PMUX)	0x52a0 (8 bits)	D7-6	P03MUX[1:0]	P03 port function select	P03MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	#ADTRG P03/EXCL0			
		D5-4	P02MUX[1:0]	P02 port function select	P02MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	TOUT6/CAP6 P02			
		D3-2	P01MUX[1:0]	P01 port function select	P01MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SCLK1 REMI			
					0x0	P01/EXCL2			
D1-0	P00MUX[1:0]	P00 port function select	P00MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SCLK0 REMO					
			0x0	P00/EXCL1					
P0[7:4] Port Function Select Register (P04_07PMUX)	0x52a1 (8 bits)	D7-6	P07MUX[1:0]	P07 port function select	P07MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	#SPISS0 P07			
		D5-4	P06MUX[1:0]	P06 port function select	P06MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	SDI0 P06			
		D3-2	P05MUX[1:0]	P05 port function select	P05MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	SDO0 P05			
D1-0	P04MUX[1:0]	P04 port function select	P04MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	reserved					
			0x1	SPICLK0 P04					
P1[3:0] Port Function Select Register (P10_13PMUX)	0x52a2 (8 bits)	D7-6	P13MUX[1:0]	P13 port function select	P13MUX[1:0]	Function	0x0	R/W	
					0x3	SDO2			
					0x2	AIN7 TOUT3/CAP3			
					0x1	P13			
		D5-4	P12MUX[1:0]	P12 port function select	P12MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SDI1			
					0x1	SIN0 P12			
		D3-2	P11MUX[1:0]	P11 port function select	P11MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SDO1			
					0x1	SOUT0 P11			
D1-0	P10MUX[1:0]	P10 port function select	P10MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	reserved					
			0x1	SPICLK1 P10					

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P1[7:4] Port Function Select Register (P14_17PMUX)	0x52a3 (8 bits)	D7-6	P17MUX[1:0]	P17 port function select	P17MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	AIN3			
					0x1	TOUT1/CAP1			
		D5-4	P16MUX[1:0]	P16 port function select	P16MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	AIN4			
					0x1	TOUT2/CAP2			
		D3-2	P15MUX[1:0]	P15 port function select	P15MUX[1:0]	Function	0x0	R/W	
					0x3	FOUTA			
					0x2	AIN5			
					0x1	TOUT5/CAP5			
D1-0	P14MUX[1:0]	P14 port function select	P14MUX[1:0]	Function	0x0	R/W			
			0x3	SDI2					
			0x2	AIN6					
			0x1	TOUT4/CAP4					
P2[3:0] Port Function Select Register (P20_23PMUX)	0x52a4 (8 bits)	D7-6	P23MUX[1:0]	P23 port function select	P23MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	SENB1			
		D5-4	P22MUX[1:0]	P22 port function select	P22MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	#SPISS2			
					0x1	AIN0			
		D3-2	P21MUX[1:0]	P21 port function select	P21MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	#SPISS1			
					0x1	AIN1			
D1-0	P20MUX[1:0]	P20 port function select	P20MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SPICK2					
			0x1	AIN2					
P2[7:4] Port Function Select Register (P24_27PMUX)	0x52a5 (8 bits)	D7-6	P27MUX[1:0]	P27 port function select	P27MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SOUT1			
					0x1	RFIN0			
		D5-4	P26MUX[1:0]	P26 port function select	P26MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	RFIN1			
		D3-2	P25MUX[1:0]	P25 port function select	P25MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	REF1			
D1-0	P24MUX[1:0]	P24 port function select	P24MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	reserved					
			0x1	SENA1					
					0x0				

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
P3[3:0] Port Function Select Register (P30_33PMUX)	0x52a6 (8 bits)	D7-6	P33MUX[1:0]	P33 port function select	P33MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SCL0			
					0x1	SCL1			
		0x0	P33						
		D5-4	P32MUX[1:0]	P32 port function select	P32MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	SDA0			
0x1	SENB0								
0x0	P32								
D3-2	P31MUX[1:0]	P31 port function select	P31MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SCL0					
			0x1	SENA0					
0x0	P31								
D1-0	P30MUX[1:0]	P30 port function select	P30MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SIN1					
			0x1	REF0					
0x0	P30								
P3[7:4] Port Function Select Register (P34_37PMUX)	0x52a7 (8 bits)	D7-6	P37MUX[1:0]	P37 port function select	P37MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	TOUT0/CAP0			
		0x0	P37						
		D5-4	P36MUX[1:0]	P36 port function select	P36MUX[1:0]	Function	0x0	R/W	
					0x3	BZOUT			
					0x2	EXOSC3			
0x1	TOUT7/CAP7								
0x0	P36								
D3-2	P35MUX[1:0]	P35 port function select	P35MUX[1:0]	Function	0x0	R/W			
			0x3	#BZOUT					
			0x2	#BFR					
			0x1	FOUTB					
0x0	P35								
D1-0	P34MUX[1:0]	P34 port function select	P34MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	SDA0					
			0x1	SDA1					
0x0	P34								
P4[2:0] Port Function Select Register (P40_42PMUX)	0x52a8 (8 bits)	D7-6	-	reserved	-	-	-	-	0 when being read.
		D5-4	P42MUX[1:0]	P42 port function select	P42MUX[1:0]	Function	0x0	R/W	
					0x3	reserved			
					0x2	reserved			
					0x1	reserved			
0x0	DCLK								
D3-2	P41MUX[1:0]	P41 port function select	P41MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	reserved					
			0x1	P41					
0x0	DST2								
D1-0	P40MUX[1:0]	P40 port function select	P40MUX[1:0]	Function	0x0	R/W			
			0x3	reserved					
			0x2	reserved					
			0x1	P40					
0x0	DSIO								

0x4020, 0x5320–0x532c

MISC Registers

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
Debug Mode Control Register 1 (MISC_DMODE1)	0x4020 (8 bits)	D7–2	–	reserved	–	–	–	0 when being read.	
		D1	DBRUN1	Run/stop select in debug mode	1 Run 0 Stop	0	R/W		
		D0	–	reserved	–	–	–	0 when being read.	
FLASHC/ SRAMC Control Register (MISC_FL)	0x5320 (16 bits)	D15–13	–	reserved	–	–	–	0 when being read.	
		D12	SRRVS	SRAMC bit order reverse	1 Reverse 0 Normal	0	R/W		
		D11–10	–	reserved	–	–	–	0 when being read.	
		D9–8	SRCYC[1:0]	SRAMC access cycle	SRCYC[1:0]	Access cycle	0x0	R/W	
					0x3	5 cycles			
					0x2	4 cycles			
0x1	3 cycles								
0x0	2 cycles								
D7–3	–	reserved	–	–	–	0 when being read.			
D2–0	FLCYC[2:0]	FLASHC read access cycle	FLCYC[2:0]	Read cycle	0x3	R/W			
			0x7–0x5	reserved					
0x4	1 cycle								
0x3	5 cycles								
0x2	4 cycles								
0x1	3 cycles								
0x0	2 cycles								
Debug Mode Control Register 2 (MISC_DMODE2)	0x5322 (16 bits)	D15–1	–	reserved	–	–	–	0 when being read.	
		D0	DBRUN2	Run/stop select in debug mode (except PCLK peripheral circuits)	1 Run 0 Stop	0	R/W		
MISC Protect Register (MISC_PROT)	0x5324 (16 bits)	D15–0	PROT[15:0]	MISC register write protect	Writing 0x96 removes the write protection of the MISC registers (0x5326–0x532a). Writing another value set the write protection.	0x0	R/W		
IRAM Size Select Register (MISC_IRAMSZ)	0x5326 (16 bits)	D15–9	–	reserved	–	–	–	0 when being read.	
		D8	DBADR	Debug base address select	1 0x0 0 0xffff00	0	R/W		
		D7	–	reserved	–	–	–	0 when being read.	
		D6–4	IRAMSZ_ACT	Actual IRAM size	0x0	0	R		
					–	–	–	–	
		D3	–	reserved	–	–	–	0 when being read.	
D2–0	IRAMSZ[2:0]	IRAM size select	IRAMSZ[2:0]	Size	0x0	R/W			
			Other	reserved					
0x5	512B								
0x4	1KB								
0x3	2KB								
0x2	4KB								
0x1	8KB								
0x0	12KB								
Vector Table Address Low Register (MISC_TTBRL)	0x5328 (16 bits)	D15–8	TTBR[15:8]	Vector table base address A[15:8]	0x0–0xff	0x80	R/W		
		D7–0	TTBR[7:0]	Vector table base address A[7:0] (fixed at 0)	0x0	0x0	R		
Vector Table Address High Register (MISC_TTBRLH)	0x532a (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.	
		D7–0	TTBR[23:16]	Vector table base address A[23:16]	0x0–0xff	0x0	R/W		
PSR Register (MISC_PSR)	0x532c (16 bits)	D15–8	–	reserved	–	–	–	0 when being read.	
		D7–5	PSRIL[2:0]	PSR interrupt level (IL) bits	0x0 to 0x7	0x0	R		
		D4	PSRIE	PSR interrupt enable (IE) bit	1 1 (enable) 0 0 (disable)	0	R		
		D3	PSRC	PSR carry (C) flag	1 1 (set) 0 0 (cleared)	0	R		
		D2	PSRV	PSR overflow (V) flag	1 1 (set) 0 0 (cleared)	0	R		
		D1	PSRZ	PSR zero (Z) flag	1 1 (set) 0 0 (cleared)	0	R		
		D0	PSRN	PSR negative (N) flag	1 1 (set) 0 0 (cleared)	0	R		

0x5340–0x5346

IR Remote Controller

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks			
REMC Configuration Register (REMC_CFG)	0x5340 (16 bits)	D15–12	CGCLK[3:0]	Carrier generator clock division ratio select	CGCLK[3:0] LCCLK[3:0]	Division ratio	0x0	R/W	Source clock = PCLK		
					0xf	reserved					
					0xe	1/16384					
					0xd	1/8192					
					0xc	1/4096					
					0xb	1/2048					
					0xa	1/1024					
					0x9	1/512					
					0x8	1/256					
					0x7	1/128					
		D11–8	LCCLK[3:0]	Length counter clock division ratio select			0x0	R/W			
					0x8	1/256					
					0x7	1/128					
					0x6	1/64					
					0x5	1/32					
					0x4	1/16					
					0x3	1/8					
					0x2	1/4					
					0x1	1/2					
					0x0	1/1					
		D7–2	–	reserved	–	–	–	0 when being read.			
		D1	REMD	REMC mode select	1	Receive	0	Transmit	0	R/W	
		D0	REME	REMC enable	1	Enable	0	Disable	0	R/W	
REMC Carrier Length Setup Register (REMC_CAR)	0x5342 (16 bits)	D15–14	–	reserved	–	–	–	–	0 when being read.		
		D13–8	REMCL[5:0]	Carrier L length setup	0x0 to 0x3f	0x0	R/W				
		D7–6	–	reserved	–	–	–	0 when being read.			
		D5–0	REMCH[5:0]	Carrier H length setup	0x0 to 0x3f	0x0	R/W				
REMC Length Counter Register (REMC_LCNT)	0x5344 (16 bits)	D15–8	REMLN[7:0]	Transmit/receive data length count (down counter)	0x0 to 0xff	0x0	R/W				
		D7–1	–	reserved	–	–	–	0 when being read.			
		D0	REMDT	Transmit/receive data	1	1 (H)	0	0 (L)	0	R/W	
REMC Interrupt Control Register (REMC_INT)	0x5346 (16 bits)	D15–11	–	reserved	–	–	–	–	0 when being read.		
		D10	REMFIF	Falling edge interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	Reset by writing 1.
		D9	REMRIF	Rising edge interrupt flag	0				R/W		
		D8	REMUIF	Underflow interrupt flag	0				R/W		
		D7–3	–	reserved	–	–	–	–	–	0 when being read.	
		D2	REMFIE	Falling edge interrupt enable	1	Enable	0	Disable	0	R/W	
		D1	REMRIE	Rising edge interrupt enable	1	Enable	0	Disable	0	R/W	
		D0	REMUIE	Underflow interrupt enable	1	Enable	0	Disable	0	R/W	

APPENDIX A LIST OF I/O REGISTERS

0x5380–0x5386

A/D Converter

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
A/D Conversion Result Register (ADC10_ADD)	0x5380 (16 bits)	D15–0	ADD[15:0]	A/D converted data ADD[9:0] are effective when STMD = 0 (ADD[15:10] = 0) ADD[15:6] are effective when STMD = 1 (ADD[5:0] = 0)	0x0 to 0x3ff	0x0	R		
A/D Trigger/ Channel Select Register (ADC10_TRG)	0x5382 (16 bits)	D15–14	–	reserved	–	–	–	0 when being read.	
		D13–11	ADCE[2:0]	End channel select	0x0 to 0x7	0x0	R/W		
		D10–8	ADCS[2:0]	Start channel select	0x0 to 0x7	0x0	R/W		
		D7	STMD	Conversion result storing mode	1 ADD[15:6] 0 ADD[9:0]	0	0		R/W
		D6	ADMS	Conversion mode select	1 Continuous 0 Single	0	0		R/W
		D5–4	ADTS[1:0]	Conversion trigger select	ADTS[1:0]	Trigger	0x0		R/W
					0x3	#ADTRG pin			
					0x2	reserved			
					0x1	T16 Ch.1			
					0x0	Software			
		D3	–	reserved	–	–	–	0 when being read.	
		D2–0	ADST[2:0]	Sampling time setting	ADST[2:0]	Sampling time	0x7	R/W	
					0x7	9 cycles			
					0x6	8 cycles			
					0x5	7 cycles			
					0x4	6 cycles			
					0x3	5 cycles			
					0x2	4 cycles			
					0x1	3 cycles			
					0x0	2 cycles			
A/D Control/ Status Register (ADC10_CTL)	0x5384 (16 bits)	D15	–	reserved	–	–	–	0 when being read.	
		D14–12	ADICH[2:0]	Conversion channel indicator	0x0 to 0x7	0x0	R		
		D11	–	reserved	–	–	–	–	0 when being read.
		D10	ADIBS	ADC10 status	1 Busy 0 Idle	0	0	R	
		D9	ADOWE	Overwrite error flag	1 Error 0 Normal	0	0	R/W	Reset by writing 1.
		D8	ADCF	Conversion completion flag	1 Completed 0 Run/Stand-by	0	0	R	Reset when ADC10_ADD is read.
		D7–6	–	reserved	–	–	–	–	0 when being read.
		D5	ADOIE	Overwrite interrupt enable	1 Enable 0 Disable	0	0	R/W	
		D4	ADCIE	Conversion completion int. enable	1 Enable 0 Disable	0	0	R/W	
		D3–2	–	reserved	–	–	–	–	0 when being read.
		D1	ADCTL	A/D conversion control	1 Start 0 Stop	0	0	R/W	
		D0	ADEN	ADC10 enable	1 Enable 0 Disable	0	0	R/W	
A/D Clock Control Register (ADC10_CLK)	0x5386 (16 bits)	D15–4	–	reserved	–	–	–	–	0 when being read.
		D3–0	ADDF[3:0]	A/D converter clock division ratio select	ADDF[3:0]	Division ratio	0x0	R/W	Source clock = PCLK
					0xf	reserved			
					0xe	1/32768			
					0xd	1/16384			
					0xc	1/8192			
					0xb	1/4096			
					0xa	1/2048			
					0x9	1/1024			
					0x8	1/512			
					0x7	1/256			
					0x6	1/128			
					0x5	1/64			
					0x4	1/32			
					0x3	1/16			
					0x2	1/8			
					0x1	1/4			
			0x0	1/2					

0x5067, 0x53a0–0x53ae

R/F Converter

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
RFC Clock Control Register (RFC_CLK)	0x5067 (8 bits)	D7–6	–	reserved	–	–	–	–	0 when being read.
		D5–4	CLKDIV[1:0]	RFC clock division ratio select	CLKDIV[1:0]	Division ratio	0x0	R/W	When the clock source is IOS3 or OSC3
							0x3	1/8	
							0x2	1/4	
							0x1	1/2	
							0x0	1/1	
		D3–2	CLKSRC[1:0]	RFC clock source select	CLKSRC[1:0]	Clock source	0x1	R/W	
					0x3	reserved			
					0x2	OSC3			
					0x1	OSC1			
		0x0	IOS3						
D1	–	reserved	–	–	–	–	0 when being read.		
D0	CLKEN	RFC clock enable	1 Enable 0 Disable	0	0	R/W			

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
RFC Control Register (RFC_CTL)	0x53a0 (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.		
		D7	CONEN	Continuous oscillation enable	1 Enable	0 Disable	0	R/W		
		D6	EVTEN	Event counter mode enable	1 Enable	0 Disable	0	R/W		
		D5-4	SMODE[1:0]	Sensor oscillation mode select	SMODE[1:0]		Sensor		0x0	R/W
					0x3	reserved	0x2	DC capacitive		
		D3-2	–	reserved	–	–	–	–	–	0 when being read.
		D1	CHSEL	Conversion channel select	1	Ch.1	0	Ch.0	0	R/W
D0	RFCEN	RFC enable	1	Enable	0	Disable	0	R/W		
RFC Oscillation Trigger Register (RFC_TRG)	0x53a2 (16 bits)	D15-3	–	reserved	–	–	–	–	0 when being read.	
		D2	SSENB	Sensor B oscillation control/status	1 Start/Run	0 Stop	0	R/W		
		D1	SSENA	Sensor A oscillation control/status	1 Start/Run	0 Stop	0	R/W		
		D0	SREF	Reference oscillation control/status	1 Start/Run	0 Stop	0	R/W		
RFC Measurement Counter Low Register (RFC_MCL)	0x53a4 (16 bits)	D15-0	MC[15:0]	Measurement counter low-order 16-bit data	0x0-0xffff		0x0	R/W		
RFC Measurement Counter High Register (RFC_MCH)	0x53a6 (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.		
		D7-0	MC[23:16]	Measurement counter high-order 8-bit data	0x0-0xff		0x0	R/W		
RFC Time Base Counter Low Register (RFC_TCL)	0x53a8 (16 bits)	D15-0	TC[15:0]	Time base counter low-order 16-bit data	0x0-0xffff		0x0	R/W		
RFC Time Base Counter High Register (RFC_TCH)	0x53aa (16 bits)	D15-8	–	reserved	–	–	–	0 when being read.		
		D7-0	TC[23:16]	Time base counter high-order 8-bit data	0x0-0xff		0x0	R/W		
RFC Interrupt Mask Register (RFC_IMSK)	0x53ac (16 bits)	D15-5	–	reserved	–	–	–	0 when being read.		
		D4	OVRTCIE	TC overflow error interrupt enable	1 Enable	0 Disable	0	R/W		
		D3	OVMCIE	MC overflow error interrupt enable	1 Enable	0 Disable	0	R/W		
		D2	ESENBIE	Sensor B oscillation completion interrupt enable	1 Enable	0 Disable	0	R/W		
		D1	ESENAIE	Sensor A oscillation completion interrupt enable	1 Enable	0 Disable	0	R/W		
		D0	EREFIE	Reference oscillation completion interrupt enable	1 Enable	0 Disable	0	R/W		
RFC Interrupt Flag Register (RFC_IFLG)	0x53ae (16 bits)	D15-5	–	reserved	–	–	–	0 when being read.		
		D4	OVRTCIF	TC overflow error interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.	
		D3	OVMCIF	MC overflow error interrupt flag			0	R/W		
		D2	ESENBIF	Sensor B oscillation completion interrupt flag			0	R/W		
		D1	ESENAIF	Sensor A oscillation completion interrupt flag			0	R/W		
		D0	EREFIF	Reference oscillation completion interrupt flag			0	R/W		

0x5068, 0x5400–0x540c

16-bit PWM Timer Ch.0

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16A Clock Control Register Ch.0 (T16A_CLK0)	0x5068 (8 bits)	D7–4	CLKDIV [3:0]	Clock division ratio select	CLKDIV[3:0]	Division ratio OSC3 or OSC1	0x0	R/W	
					0xf	1/32768	–		
					0xe	1/16384	–		
					0xd	1/8192	–		
					0xc	1/4096	–		
				0xb	1/2048	–			
				0xa	1/1024	–			
				0x9	1/512	–			
				0x8	1/256	1/256			
				0x7	1/128	1/128			
				0x6	1/64	1/64			
				0x5	1/32	1/32			
				0x4	1/16	1/16			
				0x3	1/8	1/8			
				0x2	1/4	1/4			
				0x1	1/2	1/2			
				0x0	1/1	1/1			
		D3–2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0]	Clock source	0x0	R/W	
					0x3	External clock			
					0x2	OSC3			
					0x1	OSC1			
					0x0	IOSC			
		D1	MULTIMD	Multi-comparator/capture mode select	1 Multi	0 Normal	0	R/W	
		D0	CLKEN	Count clock enable	1 Enable	0 Disable	0	R/W	
T16A Counter Ch.0 Control Register (T16A_CTL0)	0x5400 (16 bits)	D15–7	–	reserved	–	–	–	–	0 when being read.
		D6	HCM	Half clock mode enable	1 Enable	0 Disable	0	R/W	
		D5–4	CCABCNT [1:0]	Counter select	CCABCNT[1:0]	Counter Ch.	0x0	R/W	
					0x3	Ch.3			
					0x2	Ch.2			
					0x1	Ch.1			
					0x0	Ch.0			
D3	CBUFEN	Compare buffer enable	1 Enable	0 Disable	0	R/W			
D2	TRMD	Count mode select	1 One-shot	0 Repeat	0	R/W			
D1	PRESET	Counter reset	1 Reset	0 Ignored	0	W	0 when being read.		
D0	PRUN	Counter run/stop control	1 Run	0 Stop	0	R/W			
T16A Counter Ch.0 Data Register (T16A_TC0)	0x5402 (16 bits)	D15–0	T16ATC [15:0]	Counter data T16ATC15 = MSB T16ATC0 = LSB	0x0 to 0xffff	0x0	R		
T16A Comparator/Capture Ch.0 Control Register (T16A_CCCTL0)	0x5404 (16 bits)	D15–14	CAPBTRG [1:0]	Capture B trigger select	CAPBTRG[1:0]	Trigger edge	0x0	R/W	
					0x3	↑ and ↓			
					0x2	↓			
					0x1	↑			
					0x0	None			
		D13–12	TOUTBMD [1:0]	TOUT B mode select	TOUTBMD[1:0]	Mode	0x0	R/W	
					0x3	cmp B: ↑ or ↓ cmp A: ↑ or ↓			
					0x2	cmp A: ↑ or ↓			
					0x1	cmp A: ↑, B: ↓			
					0x0	Off			
		D11–10	–	reserved	–	–	–	–	0 when being read.
		D9	TOUTBINV	TOUT B invert	1 Invert	0 Normal	0	R/W	
		D8	CCBMD	T16A_CCB register mode select	1 Capture	0 Comparator	0	R/W	
D7–6	CAPATRG [1:0]	Capture A trigger select	CAPATRG[1:0]	Trigger edge	0x0	R/W			
			0x3	↑ and ↓					
			0x2	↓					
			0x1	↑					
			0x0	None					
D5–4	TOUTAMD [1:0]	TOUT A mode select	TOUTAMD[1:0]	Mode	0x0	R/W			
			0x3	cmp B: ↑ or ↓ cmp A: ↑ or ↓					
			0x2	cmp A: ↑ or ↓					
			0x1	cmp A: ↑, B: ↓					
			0x0	Off					
D3–2	–	reserved	–	–	–	–	0 when being read.		
D1	TOUTAINV	TOUT A invert	1 Invert	0 Normal	0	R/W			
D0	CCAMD	T16A_CCA register mode select	1 Capture	0 Comparator	0	R/W			
T16A Comparator/Capture Ch.0 A Data Register (T16A_CCA0)	0x5406 (16 bits)	D15–0	CCA[15:0]	Compare/capture A data CCA15 = MSB CCA0 = LSB	0x0 to 0xffff	0x0	R/W		

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16A Comparator/Capture Ch.0 B Data Register (T16A_CCB0)	0x5408 (16 bits)	D15-0	CCB[15:0]	Compare/capture B data CCB15 = MSB CCB0 = LSB	0x0 to 0xffff	0x0	R/W		
T16A Comparator/Capture Ch.0 Interrupt Enable Register (T16A_IEN0)	0x540a (16 bits)	D15-6	–	reserved	–	–	–	0 when being read.	
		D5	CAPBOWIE	Capture B overwrite interrupt enable	1 Enable 0 Disable	0	R/W		
		D4	CAPAOWIE	Capture A overwrite interrupt enable	1 Enable 0 Disable	0	R/W		
		D3	CAPBIE	Capture B interrupt enable	1 Enable 0 Disable	0	R/W		
		D2	CAPAIE	Capture A interrupt enable	1 Enable 0 Disable	0	R/W		
		D1	CBIE	Compare B interrupt enable	1 Enable 0 Disable	0	R/W		
		D0	CAIE	Compare A interrupt enable	1 Enable 0 Disable	0	R/W		
T16A Comparator/Capture Ch.0 Interrupt Flag Register (T16A_IFLG0)	0x540c (16 bits)	D15-6	–	reserved	–	–	–	0 when being read.	
		D5	CAPBOWIF	Capture B overwrite interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
		D4	CAPAOWIF	Capture A overwrite interrupt flag			0	R/W	
		D3	CAPBIF	Capture B interrupt flag			0	R/W	
		D2	CAPAIF	Capture A interrupt flag			0	R/W	
		D1	CBIF	Compare B interrupt flag			0	R/W	
		D0	CAIF	Compare A interrupt flag			0	R/W	

0x5069, 0x5420–0x542c

16-bit PWM Timer Ch.1

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16A Clock Control Register Ch.1 (T16A_CLK1)	0x5069 (8 bits)	D7-4	CLKDIV [3:0]	Clock division ratio select	CLKDIV[3:0] Division ratio OSC3 or OSC1 IOSC	0x0	R/W	
					0xf 1/32768 –			
					0xe 1/16384 –			
					0xd 1/8192 –			
					0xc 1/4096 –			
					0xb 1/2048 –			
					0xa 1/1024 –			
					0x9 1/512 –			
					0x8 1/256 1/256			
					0x7 1/128 1/128			
					0x6 1/64 1/64			
					0x5 1/32 1/32			
					0x4 1/16 1/16			
					0x3 1/8 1/8			
					0x2 1/4 1/4			
					0x1 1/2 1/2			
					0x0 1/1 1/1			
		D3-2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0] Clock source	0x0	R/W	
					0x3 External clock			
					0x2 OSC3			
					0x1 OSC1			
					0x0 IOSC			
		D1	–	reserved	–	–	–	
		D0	CLKEN	Count clock enable	1 Enable 0 Disable	0	R/W	
T16A Counter Ch.1 Control Register (T16A_CTL1)	0x5420 (16 bits)	D15-7	–	reserved	–	–	–	0 when being read.
		D6	HCM	Half clock mode enable	1 Enable 0 Disable	0	R/W	
		D5-4	CCABCNT [1:0]	Counter select	CCABCNT[1:0] Counter Ch.	0x0	R/W	
					0x3 Ch.3			
					0x2 Ch.2			
					0x1 Ch.1			
					0x0 Ch.0			
		D3	CBUFEN	Compare buffer enable	1 Enable 0 Disable	0	R/W	
		D2	TRMD	Count mode select	1 One-shot 0 Repeat	0	R/W	
		D1	PRESET	Counter reset	1 Reset 0 Ignored	0	W	0 when being read.
		D0	PRUN	Counter run/stop control	1 Run 0 Stop	0	R/W	
T16A Counter Ch.1 Data Register (T16A_TC1)	0x5422 (16 bits)	D15-0	T16ATC [15:0]	Counter data T16ATC15 = MSB T16ATC0 = LSB	0x0 to 0xffff	0x0	R	

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
T16A Comparator/ Capture Ch.1 Control Register (T16A_CCCTL1)	0x5424 (16 bits)	D15-14	CAPBTRG [1:0]	Capture B trigger select	CAPBTRG[1:0]	Trigger edge	0x0	R/W		
					0x3	↑ and ↓				
					0x2	↓				
				0x1	↑					
				0x0	None					
		D13-12	TOUTBMD [1:0]	TOUT B mode select	TOUTBMD[1:0]	Mode	0x0	R/W		
					0x3	cmp B: ↑ or ↓				
					0x2	cmp A: ↑ or ↓				
					0x1	cmp A: ↑, B: ↓				
					0x0	Off				
	D11-10	–	reserved	–	–	–	–	0 when being read.		
	D9	TOUTBINV	TOUT B invert	1	Invert	0	Normal	0	R/W	
	D8	CCBMD	T16A_CCB register mode select	1	Capture	0	Comparator	0	R/W	
T16A Comparator/ Capture Ch.1 A Data Register (T16A_CCA1)	0x5426 (16 bits)	D15-0	CCA[15:0]	Compare/capture A data CCA15 = MSB CCA0 = LSB	–	0x0 to 0xffff	0x0	R/W		
T16A Comparator/ Capture Ch.1 B Data Register (T16A_CCB1)	0x5428 (16 bits)	D15-0	CCB[15:0]	Compare/capture B data CCB15 = MSB CCB0 = LSB	–	0x0 to 0xffff	0x0	R/W		
T16A Comparator/ Capture Ch.1 Interrupt Enable Register (T16A_IEN1)	0x542a (16 bits)	D15-6	–	reserved	–	–	–	–	0 when being read.	
		D5	CAPBOWIE	Capture B overwrite interrupt enable	1	Enable	0	Disable	0	R/W
		D4	CAPAOWIE	Capture A overwrite interrupt enable	1	Enable	0	Disable	0	R/W
		D3	CAPBIE	Capture B interrupt enable	1	Enable	0	Disable	0	R/W
		D2	CAPAIE	Capture A interrupt enable	1	Enable	0	Disable	0	R/W
		D1	CBIE	Compare B interrupt enable	1	Enable	0	Disable	0	R/W
		D0	CAIE	Compare A interrupt enable	1	Enable	0	Disable	0	R/W
T16A Comparator/ Capture Ch.1 Interrupt Flag Register (T16A_IFLG1)	0x542c (16 bits)	D15-6	–	reserved	–	–	–	–	0 when being read.	
		D5	CAPBOWIF	Capture B overwrite interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W
		D4	CAPAOWIF	Capture A overwrite interrupt flag	1		0		R/W	
		D3	CAPBIF	Capture B interrupt flag	1		0		R/W	
		D2	CAPAIF	Capture A interrupt flag	1		0		R/W	
		D1	CBIF	Compare B interrupt flag	1		0		R/W	
		D0	CAIF	Compare A interrupt flag	1		0		R/W	
										Reset by writing 1.

0x506a, 0x5440–0x544c

16-bit PWM Timer Ch.2

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks				
T16A Clock Control Register Ch.2 (T16A_CLK2)	0x506a (8 bits)	D7–4	CLKDIV [3:0]	Clock division ratio select	CLKDIV[3:0]	Division ratio OSC3 or OSC1 IOSC	0x0	R/W				
					0xf	1/32768				–		
					0xe	1/16384				–		
					0xd	1/8192				–		
					0xc	1/4096				–		
					0xb	1/2048				–		
					0xa	1/1024				–		
					0x9	1/512				–		
					0x8	1/256				1/256		
					0x7	1/128				1/128		
0x6	1/64	1/64										
0x5	1/32	1/32										
0x4	1/16	1/16										
0x3	1/8	1/8										
0x2	1/4	1/4										
0x1	1/2	1/2										
0x0	1/1	1/1										
T16A Counter Ch.2 Control Register (T16A_CTL2)	0x5440 (16 bits)	D3–2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0]	Clock source	0x0	R/W				
					0x3	External clock						
					0x2	OSC3						
					0x1	OSC1						
D0	–	reserved	–	–	–	–	–	–				
D0	CLKEN	Count clock enable	1 Enable	0 Disable	0	R/W						
T16A Counter Ch.2 Control Register (T16A_CTL2)	0x5440 (16 bits)	D15–7	–	reserved	–	–	–	–	0 when being read.			
					D6	HCM	Half clock mode enable	1 Enable	0 Disable	0	R/W	
					D5–4	CCABCNT [1:0]	Counter select	CCABCNT[1:0]	Counter Ch.	0x0	R/W	
								0x3	Ch.3			
								0x2	Ch.2			
								0x1	Ch.1			
					D3	CBUFEN	Compare buffer enable	1 Enable	0 Disable	0	R/W	
D2	TRMD	Count mode select	1 One-shot	0 Repeat	0	R/W						
D1	PRESET	Counter reset	1 Reset	0 Ignored	0	W	0 when being read.					
D0	PRUN	Counter run/stop control	1 Run	0 Stop	0	R/W						
T16A Counter Ch.2 Data Register (T16A_TC2)	0x5442 (16 bits)	D15–0	T16ATC [15:0]	Counter data T16ATC15 = MSB T16ATC0 = LSB	0x0 to 0xffff	0x0	R					
T16A Comparator/ Capture Ch.2 Control Register (T16A_CCCTL2)	0x5444 (16 bits)	D15–14	CAPBTRG [1:0]	Capture B trigger select	CAPBTRG[1:0]	Trigger edge	0x0	R/W				
					0x3	↑ and ↓						
					0x2	↓						
					0x1	↑						
					0x0	None						
		D13–12	TOUTBMD [1:0]	TOUT B mode select	TOUTBMD[1:0]	Mode	0x0	R/W				
					0x3	cmp B: ↑ or ↓ cmp A: ↑ or ↓ cmp A: ↑, B: ↓						
					0x2	cmp B: ↑ or ↓ cmp A: ↑ or ↓ cmp A: ↑, B: ↓						
					0x1	cmp A: ↑, B: ↓						
		0x0	Off									
		D11–10	–	reserved	–	–	–	–	0 when being read.			
		D9	TOUTBINV	TOUT B invert	1 Invert	0 Normal	0	R/W				
		D8	CCBMD	T16A_CCB register mode select	1 Capture	0 Comparator	0	R/W				
D7–6	CAPATRG [1:0]	Capture A trigger select	CAPATRG[1:0]	Trigger edge	0x0	R/W						
			0x3	↑ and ↓								
			0x2	↓								
			0x1	↑								
0x0	None											
D5–4	TOUTAMD [1:0]	TOUT A mode select	TOUTAMD[1:0]	Mode	0x0	R/W						
			0x3	cmp B: ↑ or ↓ cmp A: ↑ or ↓ cmp A: ↑, B: ↓								
			0x2	cmp B: ↑ or ↓ cmp A: ↑ or ↓ cmp A: ↑, B: ↓								
			0x1	cmp A: ↑, B: ↓								
0x0	Off											
D3–2	–	reserved	–	–	–	–	0 when being read.					
D1	TOUTAINV	TOUT A invert	1 Invert	0 Normal	0	R/W						
D0	CCAMD	T16A_CCA register mode select	1 Capture	0 Comparator	0	R/W						
T16A Comparator/ Capture Ch.2 A Data Register (T16A_CCA2)	0x5446 (16 bits)	D15–0	CCA[15:0]	Compare/capture A data CCA15 = MSB CCA0 = LSB	0x0 to 0xffff	0x0	R/W					

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks	
T16A Comparator/Capture Ch.2 B Data Register (T16A_CCB2)	0x5448 (16 bits)	D15-0	CCB[15:0]	Compare/capture B data CCB15 = MSB CCB0 = LSB	0x0 to 0xffff	0x0	R/W		
T16A Comparator/Capture Ch.2 Interrupt Enable Register (T16A_IEN2)	0x544a (16 bits)	D15-6	–	reserved	–	–	–	0 when being read.	
		D5	CAPBOWIE	Capture B overwrite interrupt enable	1 Enable 0 Disable	0	R/W		
		D4	CAPAOWIE	Capture A overwrite interrupt enable	1 Enable 0 Disable	0	R/W		
		D3	CAPBIE	Capture B interrupt enable	1 Enable 0 Disable	0	R/W		
		D2	CAPAIE	Capture A interrupt enable	1 Enable 0 Disable	0	R/W		
		D1	CBIE	Compare B interrupt enable	1 Enable 0 Disable	0	R/W		
		D0	CAIE	Compare A interrupt enable	1 Enable 0 Disable	0	R/W		
T16A Comparator/Capture Ch.2 Interrupt Flag Register (T16A_IFLG2)	0x544c (16 bits)	D15-6	–	reserved	–	–	–	0 when being read.	
		D5	CAPBOWIF	Capture B overwrite interrupt flag	1 Cause of interrupt occurred	0 Cause of interrupt not occurred	0	R/W	Reset by writing 1.
		D4	CAPAOWIF	Capture A overwrite interrupt flag			0	R/W	
		D3	CAPBIF	Capture B interrupt flag			0	R/W	
		D2	CAPAIF	Capture A interrupt flag			0	R/W	
		D1	CBIF	Compare B interrupt flag			0	R/W	
		D0	CAIF	Compare A interrupt flag			0	R/W	

0x506b, 0x5460–0x546c

16-bit PWM Timer Ch.3

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
T16A Clock Control Register Ch.3 (T16A_CLK3)	0x506b (8 bits)	D7-4	CLKDIV [3:0]	Clock division ratio select	CLKDIV[3:0] Division ratio OSC3 or OSC1 IOSC	0x0	R/W	
					0xf 1/32768 – 0xe 1/16384 – 0xd 1/8192 – 0xc 1/4096 – 0xb 1/2048 – 0xa 1/1024 – 0x9 1/512 – 0x8 1/256 1/256 0x7 1/128 1/128 0x6 1/64 1/64 0x5 1/32 1/32 0x4 1/16 1/16 0x3 1/8 1/8 0x2 1/4 1/4 0x1 1/2 1/2 0x0 1/1 1/1			
		D3-2	CLKSRC [1:0]	Clock source select	CLKSRC[1:0] Clock source	0x0	R/W	
					0x3 External clock 0x2 OSC3 0x1 OSC1 0x0 IOSC			
		D1	–	reserved	–	–	–	
		D0	CLKEN	Count clock enable	1 Enable 0 Disable	0	R/W	
T16A Counter Ch.3 Control Register (T16A_CTL3)	0x5460 (16 bits)	D15-7	–	reserved	–	–	–	0 when being read.
		D6	HCM	Half clock mode enable	1 Enable 0 Disable	0	R/W	
		D5-4	CCABCNT [1:0]	Counter select	CCABCNT[1:0] Counter Ch.	0x0	R/W	
					0x3 Ch.3 0x2 Ch.2 0x1 Ch.1 0x0 Ch.0			
		D3	CBUFEN	Compare buffer enable	1 Enable 0 Disable	0	R/W	
		D2	TRMD	Count mode select	1 One-shot 0 Repeat	0	R/W	
		D1	PRESET	Counter reset	1 Reset 0 Ignored	0	W	0 when being read.
		D0	PRUN	Counter run/stop control	1 Run 0 Stop	0	R/W	
T16A Counter Ch.3 Data Register (T16A_TC3)	0x5462 (16 bits)	D15-0	T16ATC [15:0]	Counter data T16ATC15 = MSB T16ATC0 = LSB	0x0 to 0xffff	0x0	R	

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks			
T16A Comparator/ Capture Ch.3 Control Register (T16A_CCCTL3)	0x5464 (16 bits)	D15–14	CAPBTRG [1:0]	Capture B trigger select	CAPBTRG[1:0]	Trigger edge 0x3 ↑ and ↓ 0x2 ↓ 0x1 ↑ 0x0 None	0x0	R/W			
		D13–12	TOUTBMD [1:0]	TOUT B mode select	TOUTBMD[1:0]	Mode 0x3 cmp B: ↑ or ↓ 0x2 cmp A: ↑ or ↓ 0x1 cmp A: ↑, B: ↓ 0x0 Off	0x0	R/W			
		D11–10	–	reserved		–	–	–	–	0 when being read.	
		D9	TOUTBINV	TOUT B invert	1	Invert	0	Normal	0	R/W	
		D8	CCBMD	T16A_CCB register mode select	1	Capture	0	Comparator	0	R/W	
		D7–6	CAPATRG [1:0]	Capture A trigger select	CAPATRG[1:0]	Trigger edge 0x3 ↑ and ↓ 0x2 ↓ 0x1 ↑ 0x0 None	0x0	R/W			
		D5–4	TOUTAMD [1:0]	TOUT A mode select	TOUTAMD[1:0]	Mode 0x3 cmp B: ↑ or ↓ 0x2 cmp A: ↑ or ↓ 0x1 cmp A: ↑, B: ↓ 0x0 Off	0x0	R/W			
		D3–2	–	reserved		–	–	–	–	0 when being read.	
		D1	TOUTAINV	TOUT A invert	1	Invert	0	Normal	0	R/W	
		D0	CCAMD	T16A_CCA register mode select	1	Capture	0	Comparator	0	R/W	
T16A Comparator/ Capture Ch.3 A Data Register (T16A_CCA3)	0x5466 (16 bits)	D15–0	CCA[15:0]	Compare/capture A data CCA15 = MSB CCA0 = LSB	0x0 to 0xffff	0x0	R/W				
T16A Comparator/ Capture Ch.3 B Data Register (T16A_CCB3)	0x5468 (16 bits)	D15–0	CCB[15:0]	Compare/capture B data CCB15 = MSB CCB0 = LSB	0x0 to 0xffff	0x0	R/W				
T16A Comparator/ Capture Ch.3 Interrupt Enable Register (T16A_IEN3)	0x546a (16 bits)	D15–6	–	reserved	–	–	–	–	0 when being read.		
		D5	CAPBOWIE	Capture B overwrite interrupt enable	1	Enable	0	Disable	0	R/W	
		D4	CAPAOWIE	Capture A overwrite interrupt enable	1	Enable	0	Disable	0	R/W	
		D3	CAPBIE	Capture B interrupt enable	1	Enable	0	Disable	0	R/W	
		D2	CAPAIE	Capture A interrupt enable	1	Enable	0	Disable	0	R/W	
		D1	CBIE	Compare B interrupt enable	1	Enable	0	Disable	0	R/W	
D0	CAIE	Compare A interrupt enable	1	Enable	0	Disable	0	R/W			
T16A Comparator/ Capture Ch.3 Interrupt Flag Register (T16A_IFLG3)	0x546c (16 bits)	D15–6	–	reserved	–	–	–	–	0 when being read.		
		D5	CAPBOWIF	Capture B overwrite interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	
		D4	CAPAOWIF	Capture A overwrite interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	
		D3	CAPBIF	Capture B interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	
		D2	CAPAIF	Capture A interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	
		D1	CBIF	Compare B interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	
		D0	CAIF	Compare A interrupt flag	1	Cause of interrupt occurred	0	Cause of interrupt not occurred	0	R/W	

0xffff84–0xffffd0

S1C17 Core I/O

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks		
Processor ID Register (IDIR)	0xffff84 (8 bits)	D7–0	IDIR[7:0]	Processor ID 0x10: S1C17 Core	0x10	0x10	R			
Debug RAM Base Register (DBRAM)	0xffff90 (32 bits)	D31–24	–	Unused (fixed at 0)	0x0	0x0	R			
		D23–0	DBRAM[23:0]	Debug RAM base address	0x2fc0	0xf c0	R			
Debug Control Register (DCR)	0xffffa0 (8 bits)	D7	IBE4	Instruction break #4 enable	1	Enable	0	Disable	0	R/W
		D6	IBE3	Instruction break #3 enable	1	Enable	0	Disable	0	R/W
		D5	IBE2	Instruction break #2 enable	1	Enable	0	Disable	0	R/W
		D4	DR	Debug request flag	1	Occurred	0	Not occurred	0	R/W
		D3	IBE1	Instruction break #1 enable	1	Enable	0	Disable	0	R/W
		D2	IBE0	Instruction break #0 enable	1	Enable	0	Disable	0	R/W
		D1	SE	Single step enable	1	Enable	0	Disable	0	R/W
		D0	DM	Debug mode	1	Debug mode	0	User mode	0	R
Instruction Break Address Register 1 (IBAR1)	0xffffb4 (32 bits)	D31–24	–	reserved	–	–	–	–	0 when being read.	
		D23–0	IBAR1[23:0]	Instruction break address #1 IBAR123 = MSB IBAR10 = LSB	0x0 to 0xfffff	0x0	R/W			
Instruction Break Address Register 2 (IBAR2)	0xffffb8 (32 bits)	D31–24	–	reserved	–	–	–	–	0 when being read.	
		D23–0	IBAR2[23:0]	Instruction break address #2 IBAR223 = MSB IBAR20 = LSB	0x0 to 0xfffff	0x0	R/W			

APPENDIX A LIST OF I/O REGISTERS

Register name	Address	Bit	Name	Function	Setting	Init.	R/W	Remarks
Instruction Break Address Register 3 (IBAR3)	0xffffbc (32 bits)	D31-24	-	reserved	-	-	-	0 when being read.
		D23-0	IBAR3[23:0]	Instruction break address #3 IBAR323 = MSB IBAR30 = LSB	0x0 to 0xfffff	0x0	R/W	
Instruction Break Address Register 4 (IBAR4)	0xffffd0 (32 bits)	D31-24	-	reserved	-	-	-	0 when being read.
		D23-0	IBAR4[23:0]	Instruction break address #4 IBAR423 = MSB IBAR40 = LSB	0x0 to 0xfffff	0x0	R/W	

Appendix B Power Saving

Current consumption will vary dramatically, depending on CPU operating mode, operation clock frequency, and the peripheral circuits being operated. Listed below are the control methods for saving power.

B.1 Clock Control Power Saving

Figure B.1.1 illustrates the S1C17706 clock system.

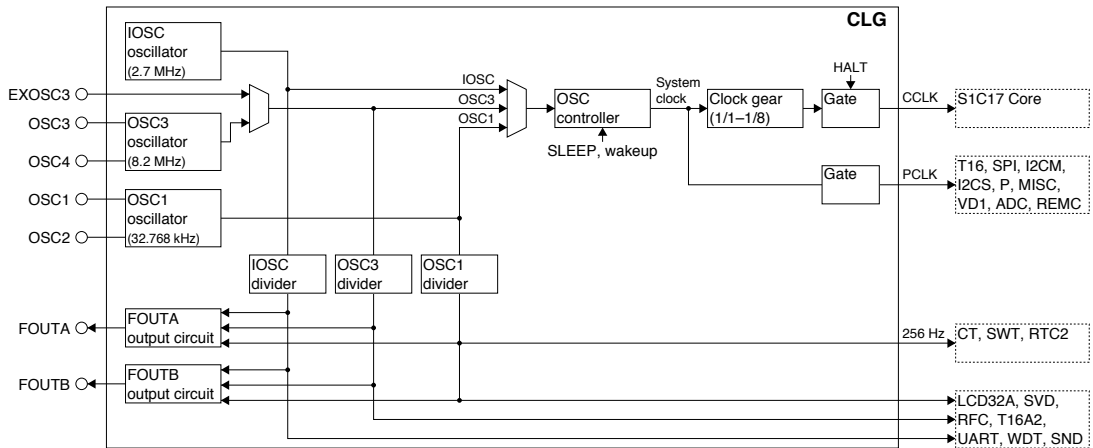


Figure B.1.1 Clock System

This section describes clock systems that can be controlled via software and power-saving control details. For more information on control registers and control methods, refer to the respective module sections.

System SLEEP (All clocks stopped)

- Execute the `slp` instruction

To deactivate the entire system, the `slp` instruction must be executed by setting `IOSCSLPEN/CLG_SLPCTL`, `OSC1SLPEN/CLG_SLPCTL` or `OSC3SLPEN/CLG_SLPCTL` register to 1. The CPU enters SLEEP mode and the system clocks stop. This also stops all peripheral circuits using clocks. Starting up the CPU from SLEEP mode is therefore limited to startup using a port (described later). If the above register value is set to 0 and if the `slp` instruction is executed, the peripheral circuits can be operated without stopping the specified oscillator circuit. However, in this case, SLEEP mode can be released through activation of a specific port circuit.

System clocks

- Select a low-speed clock source (CLG module)
Select a low-speed oscillator for the system clock source. You can reduce current consumption by selecting the OSC1 clock when low-speed processing is possible.
- Disable unnecessary oscillator circuits (CLG module)
Operate the oscillator comprising the system clock source. Where possible, stop the other oscillators. You can reduce current consumption by using OSC1 as the system clock and disable the IOOSC and OSC3 oscillators.

CPU clock (CCLK)

- Execute the `halt` instruction

Execute the `halt` instruction when program execution by the CPU is not required—for example, when only the display is required or for interrupt standby. The CPU enters HALT mode and suspends operations, but the peripheral circuits maintain the status in place at the time of the `halt` instruction, enabling use of peripheral circuits for timers and interrupts. You can reduce power consumption even further by suspending unnecessary oscillator and peripheral circuits before executing the `halt` instruction. The CPU is started from HALT mode by an interrupt from a port or the peripheral circuit operating in HALT mode.

- Select a low-speed clock gear (CLG module)

APPENDIX B POWER SAVING

The CLG module can reduce CPU clock speeds to between 1/1 and 1/8 of the system clock via the clock gear settings. You can reduce current consumption by operating the CPU at the minimum speed required for the application.

Peripheral clock (PCLK)

- Stop PCLK (CLG module)

Stop the PCLK clock supplied from the CLG to peripheral circuits if none of the following peripheral circuits is required.

Peripheral circuits that use PCLK

- UART Ch.0, Ch.1
- 16-bit timer Ch.0 to Ch.4
- SPI Ch.0 to Ch.2
- I²C master
- I²C slave
- Power generator
- P ports and port MUX (control registers, chattering filters)
- MISC registers
- IR remote controller
- A/D converter

PCLK is not required for the peripheral modules/functions shown below.

Peripheral circuits/functions that do not use PCLK

- Clock timer
- Stopwatch timer
- Watchdog timer
- Real-time clock
- Sound generator
- LCD driver
- SVD circuit
- R/F converter
- 16-bit PWM timer Ch.0 to Ch.3
- FOUTA/FOUTB outputs

Table B.1.1 shows a list of methods for clock control and starting/stopping the CPU.

Table B.1.1 Clock Control List

Current consumption	OSC1	IOSC/OSC3	CPU (CCLK)	PCLK peripheral	OSC1 peripheral	CPU stop method	CPU startup method
↑ Low	Stop	Stop	Stop	Stop	Stop	Execute <code>slp</code> instruction	1
	Select *1	Select *2*3	Stop	Stop	Select *1	Execute <code>slp</code> instruction	1
	Oscillation (system CLK)	Stop	Stop	Stop	Run	Execute <code>halt</code> instruction	1, 2
	Oscillation (system CLK)	Stop	Stop	Run	Run	Execute <code>halt</code> instruction	1, 2, 3
	Oscillation (system CLK)	Stop	Run (1/1)	Run	Run		
	Oscillation	Oscillation (system CLK)	Stop	Run	Run	Execute <code>halt</code> instruction	1, 2, 3
	Oscillation	Oscillation (system CLK)	Run (low gear)	Run	Run		
High ↓	Oscillation	Oscillation (system CLK)	Run (1/1)	Run	Run		

*1 Setting OSC1SLPEN/CLG_SLPCTL register to 0 performs oscillation; setting to 1 stops.

*2 Setting IOSCLPEN/CLG_SLPCTL register to 0 performs oscillation; setting to 1 stops.

*3 Setting OSC3SLPEN/CLG_SLPCTL register to 0 performs oscillation; setting to 1 stops.

HALT and SLEEP mode cancelation methods (CPU startup method)

1. Startup by port

- Started up by an I/O port interrupt or a debug interrupt (ICD forced break).
2. Startup by OSC1 peripheral circuit
Started up by a clock timer, stopwatch timer, watchdog timer, or real-time clock interrupt.
 3. Startup by PCLK peripheral circuit
Started up by a PCLK peripheral circuit interrupt.

B.2 Reducing Power Consumption via Power Supply Control

The available power supply controls are listed below.

Internal voltage regulator

- Setting the internal operating voltage V_{D1} to 2.5 V increases current consumption.
For normal operations, set V_{D1} to 1.8 V, and switch to 2.5 V only for Flash memory programming.
- Note that turning on internal voltage regulator heavy load protection will increase current consumption.
Turn off heavy load protection for normal operations. Turn on only if operations are unstable.

LCD voltage regulator

- Turning on the power supply voltage booster will increase current consumption.
Turn off the power supply voltage booster if the power supply voltage V_{DD} is 2.5 V or more. Use V_{DD} to drive the LCD voltage regulator. Use the power supply voltage booster only if V_{DD} is less than 2.5 V.
- Turning on the LCD voltage regulator heavy load protection will increase current consumption.
Turn off heavy load protection for normal operations. Turn on only if the display is unstable.
- If no LCD display is being used, turn off the LCD driver and the power supply voltage booster.

Power supply voltage detection (SVD) circuit

- Operating the SVD circuit will increase current consumption.
Turn off power supply voltage detection unless it is required.

Appendix C Mounting Precautions

This section describes various precautions for circuit board design and IC mounting.

Oscillator circuit

- Oscillation characteristics depend on factors such as components used (resonator, R_f , C_G , C_D) and circuit board patterns. In particular, with ceramic or crystal resonators, select the appropriate external resistor (R_f) and capacitors (C_G , C_D) only after fully evaluating components actually mounted on the circuit board.
- Oscillator clock disturbances caused by noise may cause malfunctions. To prevent such disturbances, consider the following points. The latest devices, in particular, are manufactured by microscopic processes, making them especially susceptible to noise.


Areas in which noise countermeasures are especially important include the OSC2 pin and related circuit components and wiring. OSC1 pin handling is equally important. The noise precautions required for the OSC1 and OSC2 pins are described below. We also recommend applying similar noise countermeasures to the high-speed oscillator circuit, such as the OSC3 and OSC4 pins and wiring.

- (1) Components such as a resonator, resistors, and capacitors connected to the OSC1 (OSC3) and OSC2 (OSC4) pins should have the shortest connections possible.
- (2) Wherever possible, avoid locating digital signal lines within 3 mm of the OSC1 (OSC3) and OSC2 (OSC4) pins or related circuit components and wiring. Rapidly-switching signals, in particular, should be kept at a distance from these components. Since the spacing between layers of multi-layer printed circuit boards is a mere 0.1 mm to 0.2 mm, the above precautions also apply when positioning digital signal lines on other layers.

Never place digital signal lines alongside such components or wiring, even if more than 3 mm distance or located on other layers. Avoid crossing wires.

- (3) Use Vss to shield OSC1 (OSC3) and OSC2 (OSC4) pins and related wiring (including wiring for adjacent circuit board layers). Layers wired should be adequately shielded as shown to the right. Fully ground adjacent layers, where possible. At minimum, shield the area at least 5 mm around the above pins and wiring.

Even after implementing these precautions, avoid configuring digital signal lines in parallel, as described in (2) above. Avoid crossing even on discrete layers, except for lines carrying signals with low switching frequencies.



- (4) After implementing these precautions, check the output clock waveform by running the actual application program within the product. Use an oscilloscope to check the FOUTA or FOUTB pin output.

You can check the quality of the OSC3 output waveform via the FOUTA/B output. Confirm that the frequency is as designed, is free of noise, and has minimal jitter.

You can check the quality of the OSC1 waveform via the FOUTA/B output. In particular, enlarge the areas before and after the clock rising and falling edges and take special care to confirm that the regions approximately 100 ns to either side are free of clock or spiking noise.

Failure to observe precautions (1) to (3) adequately may lead to jitter in the OSC3 output and noise in the OSC1 output. Jitter in the OSC3 output will reduce operating frequencies, while noise in the OSC1 output will destabilize timers operated by the OSC1 clock as well as CPU Core operations when the system clock switches to OSC1.


Reset circuit

- The reset signal input to the #RESET pin when power is turned on will vary, depending on various factors, such as power supply start-up time, components used, and circuit board patterns. Constants such as capacitance and resistance should be determined through testing with real-world products.
- Components such as capacitors and resistors connected to the #RESET pin should have the shortest connections possible to prevent noise-induced resets.

Power supply circuit


Sudden power supply fluctuations due to noise will cause malfunctions. Consider the following issues.

- (1) Connections from the power supply to the VDD and VSS pins should be implemented via the shortest, thickest patterns possible.
- (2) If a bypass capacitor is connected between VDD and VSS, connections between the VDD and VSS pins should be as short as possible.

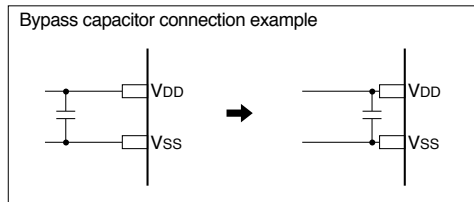

Signal line location

- To prevent electromagnetically-induced noise arising from mutual induction, large-current signal lines should not be positioned close to circuits susceptible to noise, such as oscillators.
- Locating signal lines in parallel over significant distances or crossing signal lines operating at high speed will cause malfunctions due to noise generated by mutual interference. Specifically, avoid positioning crossing signal lines operating at high speed close to circuits susceptible to noise, such as oscillators.

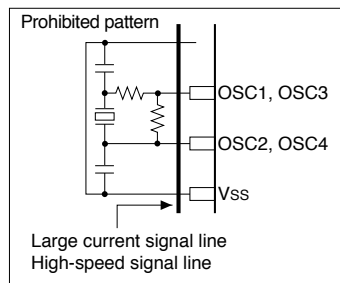

Noise-induced malfunctions

Check the following three points if you suspect the presence of noise-induced IC malfunctions.

(1) DSIO pin

Low-level noise to this pin will cause a switch to debug mode. The switch to debug mode can be confirmed by the clock output from DCLK and a High signal from the DST2 pin.

For the product version, we recommend connecting the DSIO pin directly to VDD or pulling up the DISO pin using a resistor not exceeding 10 kΩ. The IC includes an internal pull-up resistor. The resistor has a relatively high impedance of 100 kΩ to 500 kΩ and is not noise-resistant.

(2) #RESET pin

Low-level noise to this pin will reset the IC. Depending on the input waveform, the reset may not proceed correctly. This is more likely to occur if, due to circuit design choices, the impedance is high when the reset input is High.

(3) VDD and VSS power supply

The IC will malfunction at the instant when noise falling below the rated voltage is input. Incorporate countermeasures on the circuit board, including close patterns for circuit board power supply circuits, noise-filtering decoupling capacitors, and surge/noise prevention components on the power supply line.

Perform the inspections described above using an oscilloscope capable of observing waveforms of at least 200 MHz. It may not be possible to observe high-speed noise events with a low-speed oscilloscope.

If you detect potential noise-induced malfunctions while observing the waveform with an oscilloscope, recheck with a low-impedance (less than 1 k Ω) resistor connecting the relevant pin to GND or to the power supply. Malfunctions at that pin are likely if changes are visible, such as the malfunction disappearing, becoming less frequent, or the phenomena changing.

The DSIO and #RESET input circuits described above detect input signal edges and are susceptible to malfunctions induced by spike noise. This makes these digital signal pins the most susceptible to noise.

To reduce potential noise, keep the following two points in mind when designing circuit boards:

- (A) It is important to lower the signal-driving impedance, as described above. Connect pins to the power supply or GND, with impedance of 1 k Ω or less, preferably 0 Ω . The signal lines connected should be no longer than approximately 5 mm.
- (B) Parallel routing of signal lines with other digital lines on the board is undesirable, since the noise generated when the signal changes from High to Low or vice versa may adversely affect the digital lines. The signal may be subject to the most noise when signal lines are laid between multiple signal lines whose states change simultaneously. Take corrective measures by shortening the parallel distance (to several cm) or separating signal lines (2 mm or more).

Handling of light (for bare chip mounting)

The characteristics of semiconductor components can vary when exposed to light. ICs may malfunction or non-volatile memory data may be corrupted if ICs are exposed to light.

Consider the following precautions for circuit boards and products in which this IC is mounted to prevent IC malfunctions attributable to light exposure.

- (1) Design and mount the product so that the IC is shielded from light during use.
- (2) Shield the IC from light during inspection processes.
- (3) Shield the IC on the upper, underside, and side faces of the IC chip.
- (4) Mount the IC chip within one week of opening the package. If the IC chip must be stored before mounting, take measures to ensure light shielding.
- (5) Adequate evaluations are required to assess nonvolatile memory data retention characteristics before product delivery if the product is subjected to heat stress exceeding regular reflow conditions during mounting processes.

Unused pins

- (1) I/O port (P) pins
Unused pins should be left open. The control registers should be fixed at the initial status (input with pull-up enabled).
- (2) OSC1, OSC2, OSC3, and OSC4 pins
If an oscillator circuit is not used, the oscillator pins should be left open. The control registers should be fixed at the initial status (oscillation disabled).
- (3) VC1-5, CA-CE, SEG x , and COM x pins
If the LCD driver is not used, these pins should be left open. The control registers should be fixed at the initial status (display off). The unused SEG x and COM x pins that are not required to connect should be left open even if the LCD driver is used.
- (4) VD2, CF, and CG pins
If the power voltage booster is not used, these pins should be left open. The control registers should be fixed at the initial status (power voltage booster disabled).

Miscellaneous

This product series is manufactured using microscopic processes.

Although it is designed to ensure basic IC reliability meeting EIAJ and MIL standards, minor variations over time may result in electrical damage arising from disturbances in the form of voltages exceeding the absolute maximum rating when mounting the product in addition to physical damage. The following factors can give rise to these variations:

- (1) Electromagnetically-induced noise from industrial power supplies used in mounting reflow, reworking after mounting, and individual characteristic evaluation (testing) processes
- (2) Electromagnetically-induced noise from a solder iron when soldering

In particular, during soldering, take care to ensure that the soldering iron GND (tip potential) has the same potential as the IC GND.

Appendix D Initialization Routine

The following lists typical vector tables and initialization routines:

boot.s

```

.org      0x8000
.section .rodata                                     ...(1)
; =====
;      Vector table
; =====
;          ; interrupt  vector  interrupt
;          ; number    offset  source
;
.long BOOT          ; 0x00      0x00      reset                               ...(2)
.long unalign_handler ; 0x01      0x04      unalign
.long nmi_handler   ; 0x02      0x08      NMI
.long int03_handler ; 0x03      0x0c      -
.long p0_handler    ; 0x04      0x10      P0 port
.long p1_handler    ; 0x05      0x14      P1 port
.long swt_handler   ; 0x06      0x18      SWT
.long ct_handler    ; 0x07      0x1c      CT/RTC
.long t16a_2_handler ; 0x08      0x20      T16A ch2
.long svd_handler   ; 0x09      0x24      SVD
.long lcd_spi_2_handler ; 0x0a     0x28      LCD/SPI ch2
.long t16a_0_handler ; 0x0b      0x2c      T16A ch0
.long t16_0_4_handler ; 0x0c     0x30      T16 ch0, ch4
.long t16_1_handler  ; 0x0d     0x34      T16 ch1
.long t16_2_handler  ; 0x0e     0x38      T16 ch2
.long t16_3_t16a_3_handler ; 0x0f    0x3c      T16 ch3/T16A ch3
.long uart_0_handler ; 0x10     0x40      UART ch0
.long uart_1_handler ; 0x11     0x44      UART ch1
.long spi_0_handler  ; 0x12     0x48      SPI ch0
.long i2cm_handler   ; 0x13     0x4c      I2C master
.long remc_spi_1_handler ; 0x14    0x50      REMC/SPI ch1
.long t16a_1_handler ; 0x15     0x54      T16A ch1
.long adc10_handler  ; 0x16     0x58      ADC10
.long rfc_handler    ; 0x17     0x5c      RFC
.long p2_handler     ; 0x18     0x60      P2 port
.long p3_handler     ; 0x19     0x64      P3 port
.long i2cs_handler   ; 0x1a     0x68      I2C slave
.long int1b_handler  ; 0x1b     0x6c      -
.long int1c_handler  ; 0x1c     0x70      -
.long int1d_handler  ; 0x1d     0x74      -
.long int1e_handler  ; 0x1e     0x78      -
.long int1f_handler  ; 0x1f     0x7c      -
; =====
;      Program code
; =====
.text
.align 1                                           ...(3)
BOOT:
; ===== Initialize =====
; ---- Stack pointer -----
Xld.a   %sp, 0x0f00                               ...(4)
; ---- Memory controller -----
Xld.a   %r1, 0x5320      ; MISC register base address
; FLASHC
Xld.a   %r0, 0x04        ; 1 cycle access
ld.b    [%r1], %r0       ; [0x5320] <= 0x04                               ...(5)
; SRAMC
Xld.a   %r0, 0x00        ; 2 cycle access
ext     0x01
ld.b    [%r1], %r0       ; [0x5321] <= 0x01                               ...(6)

```

APPENDIX D INITIALIZATION ROUTINE

```
        ; ===== Main routine =====
        ...

; =====
;      Interrupt handler
; =====
; ----- Address unalign -----
unalign_handler:
    ...

; ----- NMI -----
nmi_handler:
    ...
```

- (1) A “.rodata” section is declared to locate the vector table in the “.vector” section.
- (2) Interrupt handler routine addresses are defined as vectors.
“intXX_handler” can be used for software interrupts.
- (3) The program code is written in the “.text” section.
- (4) Sets the stack pointer.
- (5) Sets the number of Flash controller access cycles.
Can be set to 1-cycle access for S1C17706.
(See the “Memory Map, Bus Control” chapter.)
- (6) Sets the SRAM controller access conditions.
(See the “Memory Map, Bus Control” chapter.)

Revision History

Code No.	Page	Contents
412026400	All	New establishment
412026401	16-5	Descriptions modified. If SPTBE is 0,→If SPTBE is 1,
	17-4, 17-5	Descriptions modified. Before STP can be set to 1, confirm that TBUSY...this case, wait time is necessary before STP is set to 1.
	21-4, 21-5	Descriptions added. Notes:After DSPC[1:0]/LCD_DCTL register was... register to 1 after waiting for 1 LCLK or more.

AMERICA

EPSON ELECTRONICS AMERICA, INC.

2580 Orchard Parkway,
San Jose, CA 95131, USA
Phone: +1-800-228-3964 Fax: +1-408-922-0238

EUROPE

EPSON EUROPE ELECTRONICS GmbH

Riesstrasse 15, 80992 Munich,
GERMANY
Phone: +49-89-14005-0 Fax: +49-89-14005-110

ASIA

EPSON (CHINA) CO., LTD.

7F, Jinbao Bldg., No.89 Jinbao St.,
Dongcheng District,
Beijing 100005, CHINA
Phone: +86-10-8522-1199 Fax: +86-10-8522-1125

SHANGHAI BRANCH

7F, Block B, Hi-Tech Bldg., 900 Yishan Road,
Shanghai 200233, CHINA
Phone: +86-21-5423-5577 Fax: +86-21-5423-4677

SHENZHEN BRANCH

12F, Dawning Mansion, Keji South 12th Road,
Hi-Tech Park, Shenzhen 518057, CHINA
Phone: +86-755-2699-3828 Fax: +86-755-2699-3838

EPSON HONG KONG LTD.

Unit 715-723, 7/F Trade Square, 681 Cheung Sha Wan Road,
Kowloon, Hong Kong.
Phone: +852-2585-4600 Fax: +852-2827-4346

EPSON TAIWAN TECHNOLOGY & TRADING LTD.

14F, No. 7, Song Ren Road,
Taipei 110, TAIWAN
Phone: +886-2-8786-6688 Fax: +886-2-8786-6660

EPSON SINGAPORE PTE., LTD.

1 HarbourFront Place,
#03-02 HarbourFront Tower One, Singapore 098633
Phone: +65-6586-5500 Fax: +65-6271-3182

SEIKO EPSON CORP.**KOREA OFFICE**

5F, KLI 63 Bldg., 60 Yoido-dong,
Youngdeungpo-Ku, Seoul 150-763, KOREA
Phone: +82-2-784-6027 Fax: +82-2-767-3677

SEIKO EPSON CORP.**MICRODEVICES OPERATIONS DIVISION****Device Sales & Marketing Dept.**

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-42-587-5814 Fax: +81-42-587-5117