

S1V30345/343/341

Voice Guidance LSI

■ Overview

The S1V3034x Series range of LSIs incorporates high-compression, high-quality audio decoding functions, audio data ROM, and DA converters, make it ideal for use in voice guidance products. The voice data creation tool for EPSON voice guidance LSI allows easy creation of high-quality voice data from text data without studio recording. Three audio data ROM sizes are available to suit specific needs. These LSIs allow audio data to be transferred from a host when additional audio data is required. All functions are controlled by commands via a serial interface for easy addition to any existing system incorporating a host. The S1V3034x series offers pin compatibility^(*) with the S1V3S344 and S1V3G340, facilitating substitution to suit system configurations.


* S1V3S344 and S1V3G340 differs in external parts from S1V3034x series.

■ Features

- **Audio playback**
 - High-compression, high-quality audio decoder (proprietary Epson data format)
 - Bitrate: 40 kbps, 32 kbps, 24 kbps, 16 kbps
 - Sampling rate: 16 kHz
- **Sequencer function (phrase interval setting)**
 - Sequence setting for up to 64 phrases (unlimited combinations)
 - Variable phrase interval delay setting: 0 ms or 20 ms to 2,047 ms (in 1 ms steps)
- **Built-in audio data ROM**
 - The following areas are reserved internally for audio data.
 - S1V30345: 640 Kbytes (approx. 5 mins/16 kbps)
 - S1V30343: 384 Kbytes (approx. 3 mins/16 kbps)
 - S1V30341: 128 Kbytes (approx. 1 min/16 kbps)
- **Host interface**
 - Synchronized serial interface (SPI), supporting UART and I2C
 - Command control
- **High-quality 16-bit DA converter**
 - Sampling rate (f_s): 16 kHz
 - Input bits: 16 bits
- **Clock**
 - Clock input: 32.768 kHz or 12.288 MHz
 - Crystal or ceramic oscillator: 32.768 kHz or 12.288 MHz
- **Package**
 - QFP-52pin (10 mm x 10 mm) 0.65 mm pin pitch
 - QFP-48pin (7 mm x 7 mm) 0.5 mm pin pitch
- **Power supply voltage**
 - 2.2 V to 5.5 V (Single power supply)

■ Standard application system

The S1V3034x Series standard application system is configured as shown in the diagram below. The S1V3034x Series is command-controlled by the host using a messaging protocol via the serial interface. Controlled by commands sent from the host via the serial interface after power-on resetting, the S1V3034x Series outputs voice audio while internally decoding and processing internal or streamed (via host command transfer) compressed audio data.

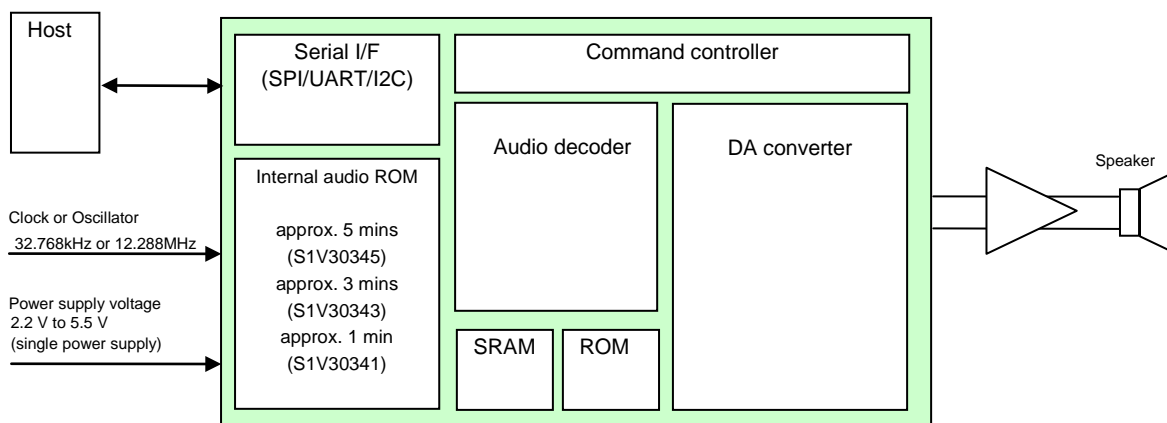


S1V30345/343/341

Development Tools


- Evaluation board
- Voice data creation tool for EPSON voice guidance LSI
- Sample programs

[Overview of voice data creation tool]


Step.1: Voice guidance registration




Step.2: Pronunciation editing



Step.3: Phrase editing



Step.4: ROM data production



- Supported languages: Japanese, English, Korean (all female voices)

NOTICE:

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You are requested not to use, to resell, to export and/or to otherwise dispose of the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes.

All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©Seiko Epson Corporation 2013, All rights reserved

SEIKO EPSON CORPORATION

MICRODEVICES OPERATIONS DIVISION

Device Sales & Marketing Department
421-8 Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-42-587-5814 FAX: +81-42-587-5117

EPSON semiconductor website

<http://global.epson.com/products/semicon/>

Document code: 411518902
First issue August, 2008
Revised July, 2015 in Japan