

## Wide Dynamic Range IMU (Inertial Measurement Unit)

### ■ GENERAL DESCRIPTION

The M-G354PD is a small form factor inertial measurement unit (IMU) with 6 degrees of freedom: triaxial angular rates and linear accelerations, and provides high-stability and high-precision measurement capabilities with the use of high-precision compensation technology. A variety of calibration parameters are stored in a memory of the IMU, and are automatically reflected in the measurement data being sent to the application after the power of the IMU is turned on. With a general-purpose SPI/UART supported for host communication, the M-G354PD reduces technical barriers for users to introduce inertial measurement and minimizes design resources to implement inertial movement analysis and control applications.

The features of the IMU such as high stability, high precision, and small size make it easy to create and differentiate applications in various fields of industrial systems.

### ■ FEATURES


- Small Size, Lightweight : 24x24x10 mm<sup>3</sup>, 10g
- Rugged Metal Body / High Vibration Resistance
- Low-Noise, High-stability
  - Gyro Bias Instability : 3 °/h
  - Angular Random Walk : 0.1 °/√h
- Initial Bias Error : 360 °/h
- 6 Degrees Of Freedom
  - Triple Gyroscopes : ±450 °/s,
  - Tri-Axis Accelerometer : ±5 G
- 16/32bit data resolution
- Digital Serial Interface : SPI / UART
- Calibrated Stability (Bias, Scale Factor, Axial alignment)
- Data output rate : to 2k Sps
- External Trigger Input / External Counter Reset Input
- Calibration temperature range : -40 °C to +85 °C
- Operating temperature range : -40 °C to +85 °C
- Single Voltage Supply : 3.3 V
- Low Power Consumption : 18 mA (Typ.)



### ■ APPLICATIONS

- Antenna and Platform Stabilization
- Camera Gimbals
- Motion analysis and control
- Navigation systems
- Vibration control and stabilization
- Pointing and tracking systems

### ■ FUNCTIONAL BLOCK DIAGRAM

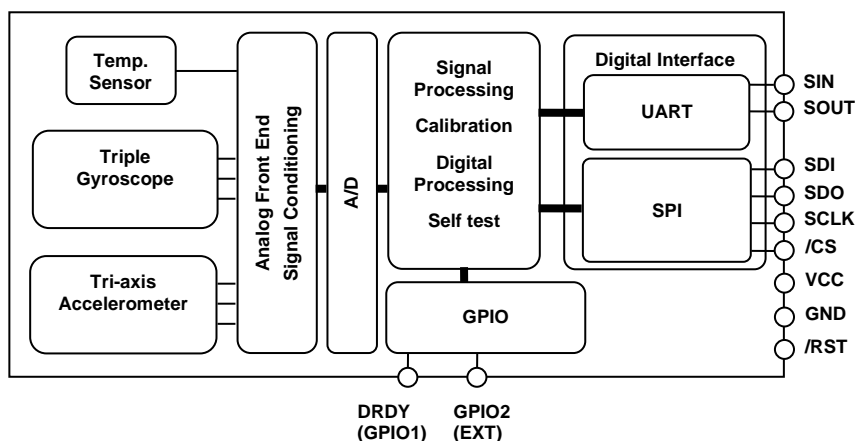

## ■ SENSOR SECTION SPECIFICATION

T<sub>A</sub>=25 °C, VCC=3.3 V, angular rate=0 °/s, ±1 G, unless otherwise noted.

Parameter	Test Conditions / Comments	Min.	Typ.	Max.	Unit
<b>GYRO SENSOR</b>					
<b>Sensitivity</b>					
Dynamic Range	—	—	±450	—	°/s
Scale Factor	16bit	Typ-0.2%	0.016	Typ+0.2%	(°/s)/LSB
Temperature Coefficient	1 σ, -40°C ≤ T <sub>A</sub> ≤ +85°C	—	15	—	ppm/°C
Nonlinearity	≤±300°/s	—	0.05	—	% of FS
	≥±300°/s	—	0.2	—	
Misalignment	1 σ, Axis-to-axis, Δ = 90° ideal	—	0.02	—	°
<b>Bias</b>					
Initial Error	1 σ, -40°C ≤ T <sub>A</sub> ≤ +85°C	—	360	—	°/h
Temperature Coefficient (Linear approximation)	1 σ, -40°C ≤ T <sub>A</sub> ≤ +85°C	—	1.8	—	(°/s)/°C
Bias instability	Average	—	3	—	°/h
Angular Random Walk	Average	—	0.1	—	°/√h
Linear Acceleration Effect	Average	—	18	—	(°/h)/G
<b>Noise</b>					
Noise Density	Average, f = 10 to 20 Hz	—	7.9	—	(°/h)/√Hz, rms
<b>Frequency Property</b>					
3 dB Bandwidth	—	—	200	—	Hz
<b>ACCELEROMETERS</b>					
<b>Sensitivity</b>					
Dynamic Range	—	±5	—	—	G
Scale Factor	16bit	Typ-0.2%	0.2	Typ+0.2%	mG/LSB
Temperature Coefficient	1σ, -40°C ≤ T <sub>A</sub> ≤ +85°C	—	15	—	ppm/°C
Nonlinearity	1 σ, ≤ 1G, Best fit straight line	—	0.1	—	% of FS
Misalignment	1 σ, Axis-to-axis, Δ = 90° ideal	—	0.01	—	°
<b>Bias</b>					
Initial Error	1 σ, -40°C ≤ T <sub>A</sub> ≤ +85°C	—	5	—	mG
Temperature Coefficient (Linear approximation)	1 σ, -40°C ≤ T <sub>A</sub> ≤ +85°C	—	0.02	—	mG/°C
In-Run Bias Stability	Average	—	0.07	—	mG
Velocity Random Walk	Average	—	0.03	—	(m/s)/√hr
<b>Noise</b>					
Noise Density	Average, f = 10 to 20 Hz	—	0.06	—	mG/√Hz, rms
<b>Frequency Property</b>					
3 dB Bandwidth	—	—	200	—	Hz
<b>TEMPERATURE SENSOR</b>					
Scale Factor *1	Output = 2634(0x0A4A) @ +25°C	—	-0.0037918	—	°C/LSB

\*1) This is a reference value used for internal temperature compensation. We provide no guarantee that the value gives an absolute value of the internal temperature.

\*2) This is the temperature scale factor for the upper 16bit (**TEMP\_HIGH**).

Note) The values in the specifications are based on the data calibrated at the factory. The values may change according to the way the product is used.


Note) The Typ values in the specifications are average values or 1σ values.

Note) Unless otherwise noted, the Max / Min values in the specifications are design values or Max / Min values at the factory tests.

## RECOMMENDED OPERATING CONDITION

Parameter	Condition	min	Typ	Max	Unit
VCC to GND		3.15	3.3	3.45	V
Digital Input Voltage to GND		GND		VCC	V
Digital Output Voltage to GND		-0.3		VCC +0.3	V
Calibration temperature range	Performance parameters are applicable	-40		85	°C
Operating Temperature Range		-40		85	°C

## OUTLINE DIMENSIONS

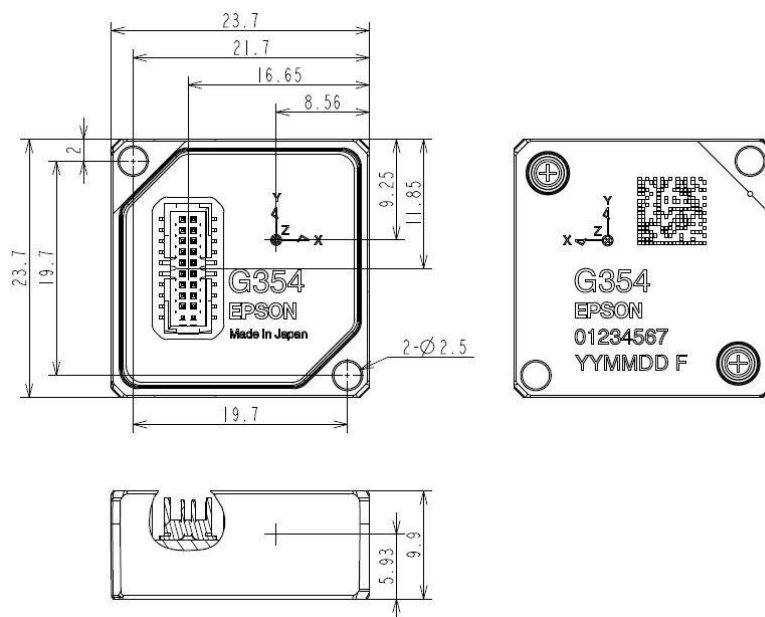

Outline Dimensions (millimeters)

## Notice of the Document

NOTICE : PLEASE READ CAREFULLY BELOW BEFORE THE USE OF THIS DOCUMENT ©Seiko Epson Corporation 2022

- 1.The content of this document is subject to change without notice. Before purchasing or using Epson products, please contact with sales representative of Seiko Epson Corporation (“Epson”) for the latest information and be always sure to check the latest information published on Epson’s official web sites and resources.
- 2.This document may not be copied, reproduced, or used for any other purposes, in whole or in part, without Epson’s prior consent.
- 3.Information provided in this document including, but not limited to application circuits, programs and usage, is for reference purpose only. Epson makes no guarantees against any infringements or damages to any third parties’ intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, any intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
- 4.Using Epson products, you shall be responsible for safe design in your products; that is, your hardware, software, and/or systems shall be designed enough to prevent any critical harm or damages to life, health or property, even if any malfunction or failure might be caused by Epson products. In designing your products with Epson products, please be sure to check and comply with the latest information regarding Epson products (including, but not limited to this document, specifications, data sheets, manuals, and Epson’s web site). Using technical contents such as product data, graphic and chart, and technical information, including programs, algorithms and application circuit examples under this document, you shall evaluate your products thoroughly both in stand-alone basis and within your overall systems. You shall be solely responsible for deciding whether to adopt/use Epson products with your products.
- 5.Epson has prepared this document carefully to be accurate and dependable, but Epson does not guarantee that the information is always accurate and complete. Epson assumes no responsibility for any damages you incurred due to any misinformation in this document.
- 6.No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
- 7.Epson products have been designed, developed and manufactured to be used in general electronic applications and specifically designated applications (“Anticipated Purpose”). Epson products are NOT intended for any use beyond the Anticipated Purpose that requires particular quality or extremely high reliability in order to refrain from causing any malfunction or failure leading to critical harm to life and health, serious property damage, or severe impact on society, including, but not limited to listed below (“Specific Purpose”). Therefore, you are strongly advised to use Epson products only for the Anticipated Purpose.  
Should you desire to purchase and use Epson products for Specific Purpose, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any Specific Purpose.  
Space equipment (artificial satellites, rockets, etc.)/Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.)/Medical equipment/Relay equipment to be placed on sea floor/ Power station control equipment/Disaster or crime prevention equipment/Traffic control equipment/Financial equipment  
Other applications requiring similar levels of reliability as the above
- 8.Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibits to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for the purposes of military weapons development (e.g. mass destruction weapons), military use, or any other military applications. If exporting Epson products or our associated technologies, please be sure to comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A (EAR) and other export-related laws and regulations in Japan and any other countries and to follow their required procedures.
- 9.Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document or for any damages (whether direct or indirect) incurred by any third party that you give, transfer or assign Epson products.
- 10.For more details or other concerns about this document, please contact our sales representative.
- 11.Companv names and product names listed in this document are trademarks or registered trademarks of their respective companies.

## SEIKO EPSON CORPORATION

MD SALES & MARKETING DEPT.

29th Floor, JR Shinjuku Miraina Tower, 4-1-6 Shinjuku, Shinjuku-ku,  
Tokyo, 160-8801, Japan  
Phone: +81-3-6682-4322 FAX: +81-3-6682-5016

Modified date; APR. 2022